


HFKW-SH

AUTOMOTIVE RELAY



Typical Applications
Anti-theft lock, Lighting control




Features

- Small size
- Double NO contacts
- Standard terminal pitch employed
- Plastic sealed and flux proofed types available
- RoHS & ELV compliant

CHARACTERISTICS				
Contact arrangement	1U (Double NO contacts)		Ambient temperature	-40°C to 85°C
Voltage drop (initial) ¹⁾	Typ.: 50mV (at 10A)		Vibration resistance ⁶⁾	10Hz to 55Hz 1.5mm DA
	Max.: 250mV (at 10A)		Shock resistance ⁶⁾	98m/s ²
Max. continuous current ²⁾	2 × 10A (at 23°C, 1h)		Termination	PCB ⁷⁾
Max. switching current ³⁾	2 ×10A		Construction	Plastic sealed, Flux proofed
Min.contact load	1A 6VDC		Unit weight	Approx. 6g
Electrical endurance	See "CONTACT DATA"		<div>1) Equivalent to the max. initial contact resistance is 100mΩ (at 1A 6VDC) 2) For NO contacts, measured when applying 100% rated votage on coil 3) At 23°C, 13.5VDC (100 cycles, resistive load). 4) 1min, leakage current less than 1mA. 5) The value is measured when voltage drops suddenly from nominal voltage to 0 VDC and coil is not paralleled with suppression circuit. 6) When energized, opening time of NO contacts shall not exceed 100μs 7) Since it is an environmental friendly product, please select lead-free solder when welding. The recommended soldering temperature and time is (250±3)°C , (5±0.3)s.</div>	
Mechanical endurance	1 x 10 ⁷ OPS (300OPS/min)			
Initial insulation resistance	100MΩ (at 500VDC)			
Dielectric strength ⁴⁾	500VAC			
Operate time	Max.: 10ms (at nomi. vol.)			
Release time ⁵⁾	Max.: 5ms			

CONTACT DATA ³⁾								at 23°C
Load voltage	Load type		Load current A	On/Off ratio		Electrical endurance OPS	Contact material	Load wiring diagram ²⁾
			1 U	On s	Off s			
13.5VDC	Resistive	Make	2 × 6	2	2	2 × 10 ⁵	AgSnO ₂	See diagram 1
		Break	2 × 6	2	2			
	Lamp ¹⁾		(2×21W+1×5W) × 2	0.3	2	1 × 10 ⁵	AgSnO ₂	See diagram 2
	Lamp ¹⁾		(2×21W) × 2	1	14	1 × 10 ⁵	AgSnO ₂	See diagram 2

- 1) When it is utilized in flasher, a special AgSnO₂ contact material should be used and the customer special code should be (170) as a suffix.
Please connect by the polarity according to the diagram below.
- 2) The load wiring diagrams are listed below:



- 3) When the load voltage is at 24VDC or higher, or the applications conditions are different from the table above, please submit the detailed application conditions to Hongfa to get more support.

COIL DATA							at 23°C
Nominal voltage ¹⁾ VDC	Pick-up voltage VDC max.		Drop-out voltage VDC min.	Coil resistance x(1±10%)Ω	Power consumption W	Max. allowable overdrive voltage ²⁾ VDC	
	at 23°C	at 85°C				at 23°C	at 85°C
6	3.5	4.5	0.5	36	1	9	7
9	5.2	6.8	0.7	81	1	13.5	10.5
10	5.8	7.9	0.8	100	1	15	11.7
12	6.9	9.0	1.0	144	1	18	14


- 1) Other types on request.
- 2) Max. allowable overdrive voltage is stated with no load applied.

ORDERING INFORMATION							
Type	HFKW /	012	-SH	W	L	C	(XXX)
Coil voltage	006: 6VDC 009: 9VDC 010: 10VDC 012: 12VDC						
Contact arrangement	SH: 1 Form U (Double NO contacts)						
Contact material	W: AgSnO ₂						
Construction ¹⁾	L: Flux proofed (Reflow soldering version) Nil: Plastic sealed ²⁾						
Packing style	C: Tape and reel packing Nil: Tube packing						
Customer special code	e.g. (170) stands for flasher load						

- 1) The structure of HFKW/□□□-SH-W-L□ is only flux proof, the open vent hole is at the bottom of the base.
- 2) If water cleaning is required after the relay is assembled on PCB, please contact us for suggestion about suitable parts.


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

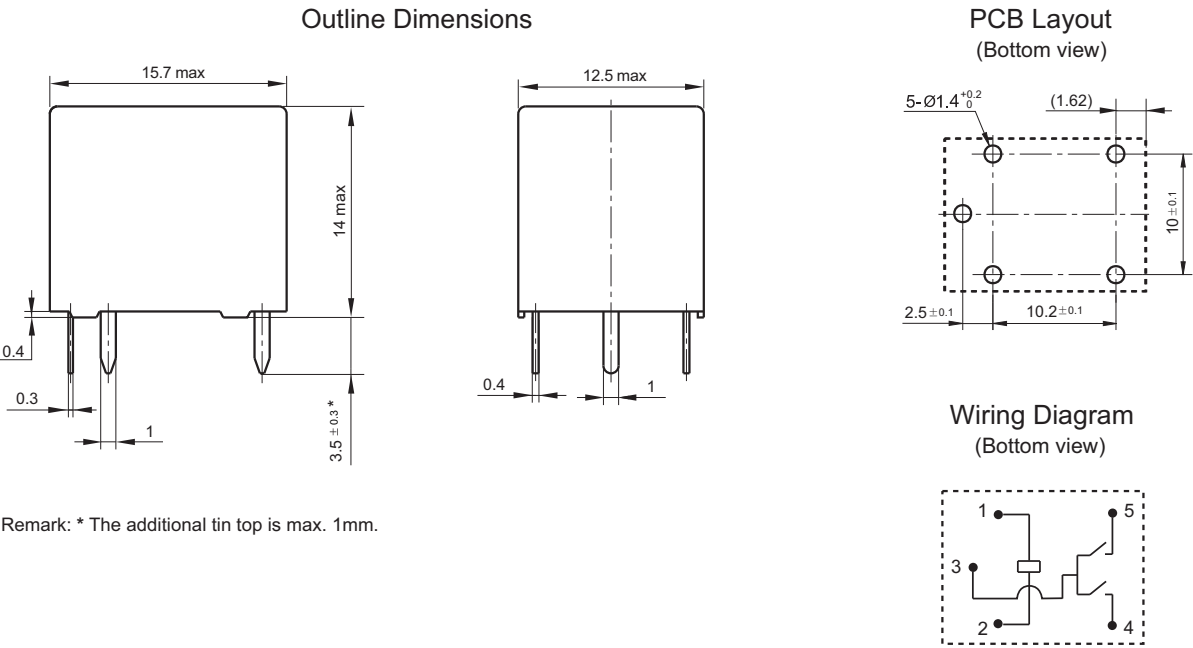

TAPE AND REEL PACKING


Unit: mm

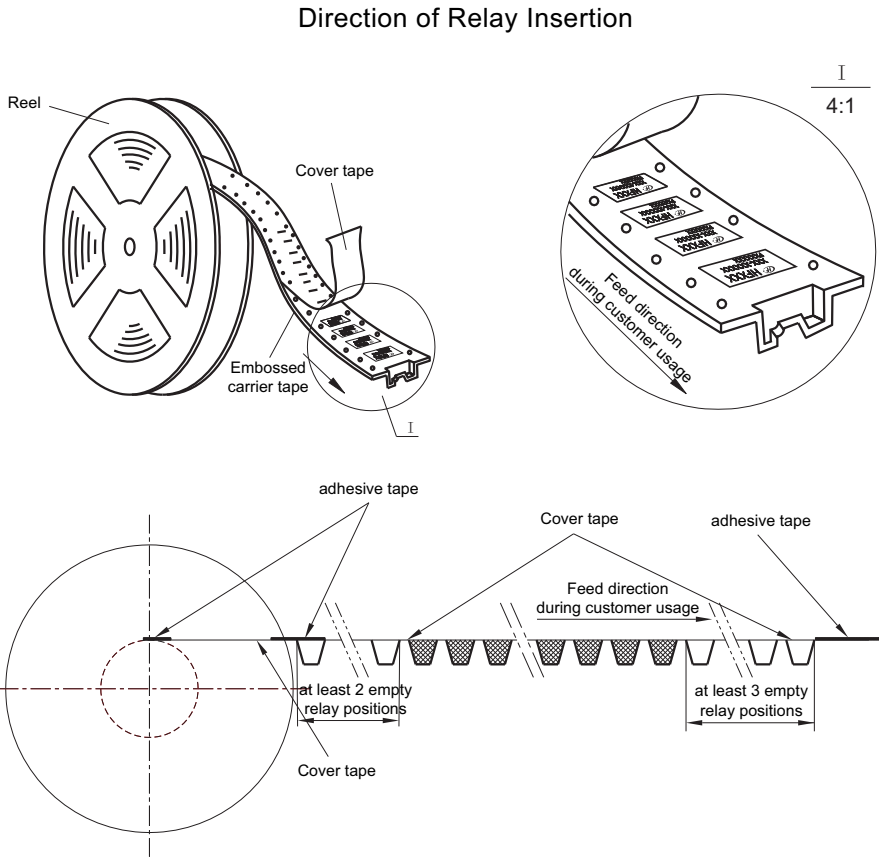


TAPE AND REEL PACKING

Unit: mm

Reel Dimensions

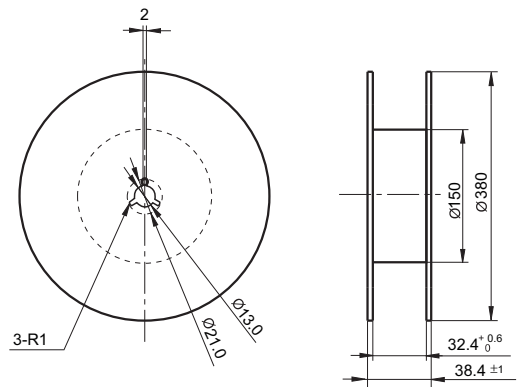


Tape Dimensions

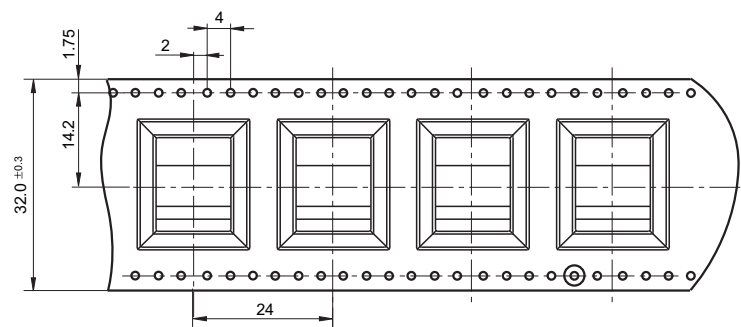


CHARACTERISTIC CURVES

1. Coil temperature rise

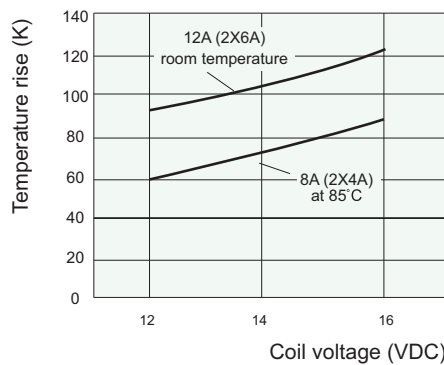

2. Pick-up & drop-out voltage - ambient temperature characteristic

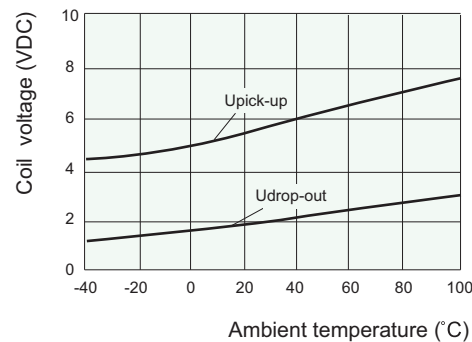

HFKW/012-SHW(XXX)

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.