

HF18FF

MINIATURE INTERMEDIATE POWER RELAY



File No.:E133481



File No.:R50147087



File No.:CQC09002030026 (DC type)
CQC09002030027 (AC type)



Features

- 7A switching capability (2C, 3C type)
- 1.5kV dielectric strength (between coil and contacts)
- Gold plated contact available
- Conform to the CE low voltage directive
- Sockets available
- 2 to 4 pole configurations
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (28.0 x 21.5 x 35.0) mm

CONTACT DATA		
Contact arrangement	2C, 3C	4C
Contact resistance	100mΩ max.(at 1A 6VDC)	
Contact material	See ordering info.	
Contact rating (Res. load)	7A 250VAC/30VDC	5A 250VAC/30VDC
Max. switching voltage	250VAC / 30VDC	
Max. switching current	7A	5A
Max. switching power	210W 1750VA	150W 1250VA
Mechanical endurance	2 x 10 ⁷ OPS	
Electrical endurance	1 x 10 ⁵ OPS (See approval reports for more details)	

CHARACTERISTICS		
Insulation resistance		1000MΩ (at 500VAC)
Dielectric strength	Between coil & contacts	1500VAC 1min
	Between open contacts	1000VAC 1min
	Between contact sets	1500VAC 1min
Operate time (at nomi. volt.)		DC type: 25ms max.
Release time (at nomi. volt.)		DC type: 25ms max.
Temperature rise (no-load, at nomi.volt.)		60K max.
Shock resistance	Functional	98m/s ²
	Destructive	980m/s ²
Vibration resistance		10Hz to 55Hz 1mm DA
Humidity		5% to 85% RH
Ambient temperature		-40°C to 70°C
Termination		PCB, Plug-in
Unit weight		Approx. 37g
Construction		Dust protected

Notes: 1) The data shown above are initial values.
2) UL insulation system: Class A

COIL	
Coil power	DC type: Approx. 0.9W to 1.1W; AC type: Approx. 1.2VA to 1.8VA

COIL DATA					at 23°C
Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Allowable Voltage VDC	Coil Resistance Ω	
5	4.0	0.50	5.5	27.5 x (1±10%)	
6	4.8	0.60	6.6	40 x (1±10%)	
12	9.6	1.20	13.2	160 x (1±10%)	
24	19.2	2.40	26.4	650 x (1±10%)	
48	38.4	4.80	52.8	2600 x (1±15%)	
110	88.0	11.0	121	11000 x (1±15%)	

Nominal Voltage VAC	Pick-up Voltage VAC max.	Drop-out Voltage VAC min.	Max. Allowable Voltage VAC	Coil Resistance Ω	
6	4.80	1.80	6.6	11.5 x (1±10%)	
12	9.60	3.60	13.2	46 x (1±10%)	
24	19.2	7.20	26.4	184 x (1±10%)	
48	38.4	14.4	52.8	735 x (1±10%)	
120	96.0	36.0	132	4550 x (1±15%)	
220/240	176.0	72.0	264	14400 x (1±15%)	

SAFETY APPROVAL RATINGS		
UL/CUL	2 Form C	7A 250VAC/30VDC
	3 Form C	5A 250VAC/30VDC
	4 Form C	
TÜV	2 Form C	7A 250VAC/30VDC
	3 Form C	
	4 Form C	5A 250VAC/30VDC

Notes: Only some typical ratings are listed above. If more details are required, please contact us.

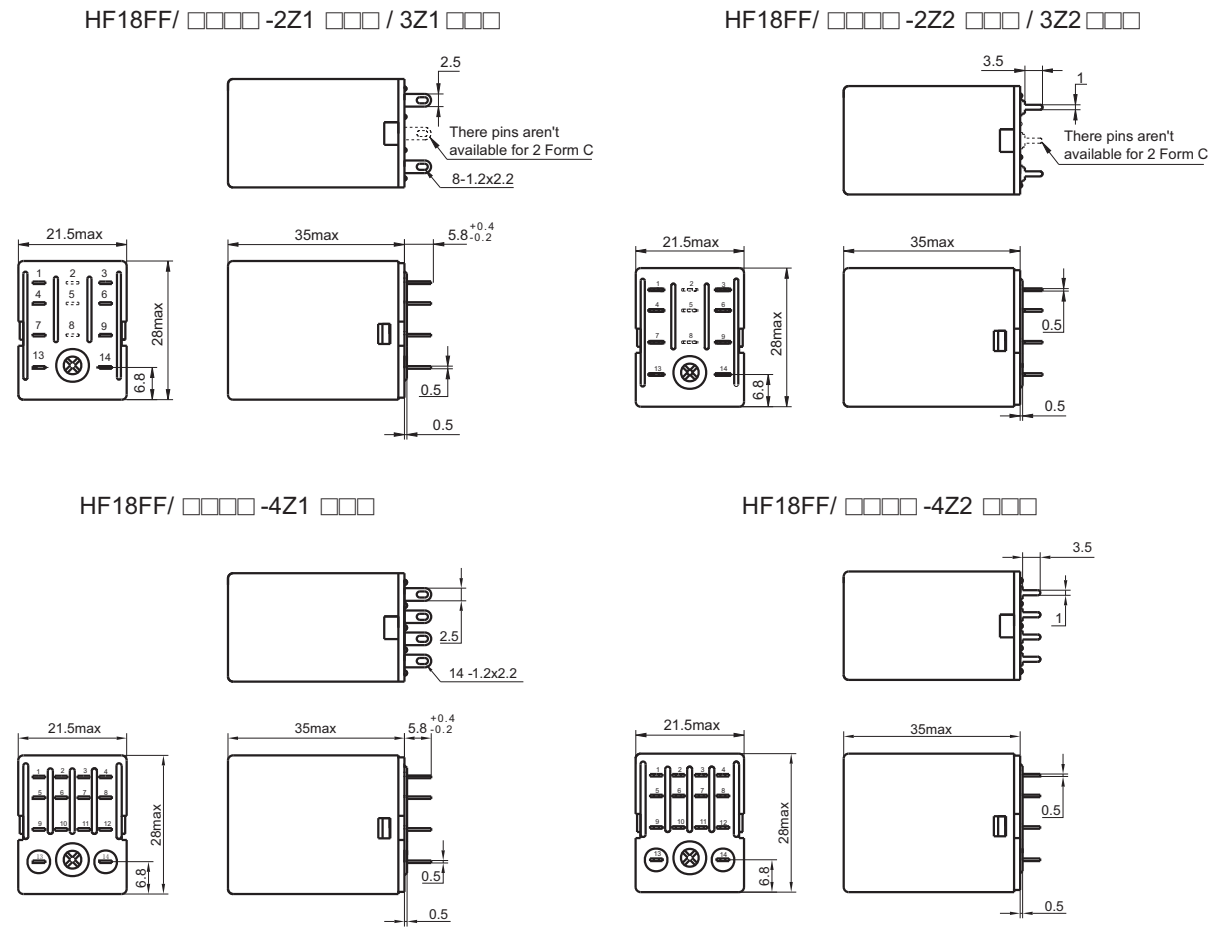
ORDERING INFORMATION									
HF18FF / A 012 -2Z 1 G D (XXX)									
Type									
Coil voltage form	A: AC Nil: DC								
Coil voltage	DC: 5VDC to 110VDC AC: 6VAC to 240VAC								
Contact arrangement	2Z: 2 Form C 3Z: 3 Form C 4Z: 4 Form C								
Mounting Termination (See the following)	1: Socket 2: PCB 5: Flange-Mounting								
Contact material	T: AgSnO ₂ Nil: AgCe G: AgCe + Au plated TG: AgSnO ₂ + Au plated								
LED	D: With LED Nil: Without LED								
Customer special code									

Notes: 1) We also can supply the special type with terminals numbered 1,4,5,8,9,12,13,14 for 2 poles.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

Outline Dimensions

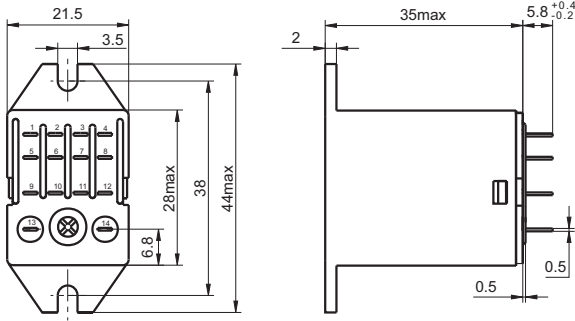


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

HF18FF/ □□□□ -4Z5 □□□

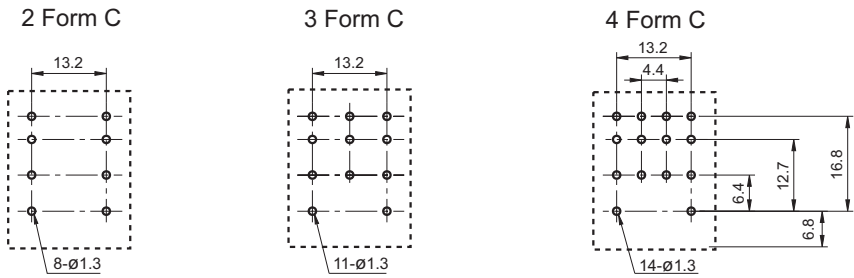
Outline Dimensions



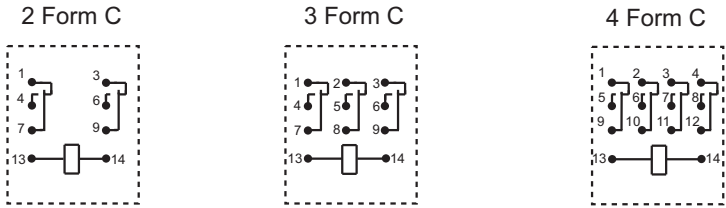
Mounting Holes



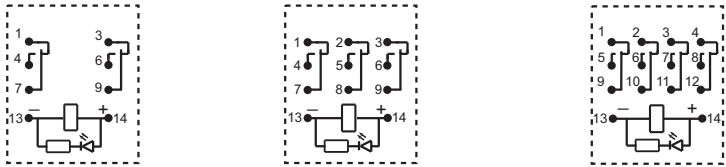
PCB Layout
(Bottom view)



Wiring Diagram
(Bottom view)

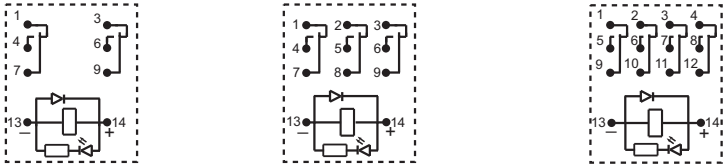


2 Form C (With LED) 3 Form C (With LED) 4 Form C (With LED)



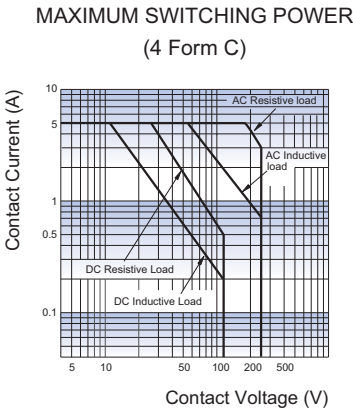
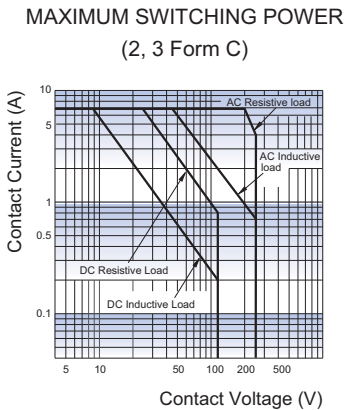
Remark: For AC parts with diode, the positive and negative pole markings on wiring diagram are not applicable.

2 Form C (DC, With fly-wheel diode) 3 Form C (DC, With fly-wheel diode) 4 Form C (DC, With fly-wheel diode)



Remark: 1) In case of no tolerance shown in outline dimension: outline dimension $\leq 1\text{mm}$, tolerance should be $\pm 0.2\text{mm}$; outline dimension $> 1\text{mm}$ and $\leq 5\text{mm}$, tolerance should be $\pm 0.3\text{mm}$; outline dimension $> 5\text{mm}$, tolerance should be $\pm 0.4\text{mm}$.
2) The tolerance without indicating for PCB layout is always $\pm 0.1\text{mm}$.

CHARACTERISTIC CURVES



Relay Sockets



Features

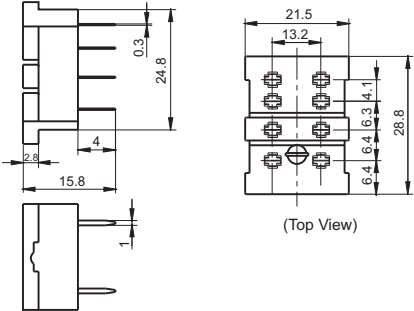

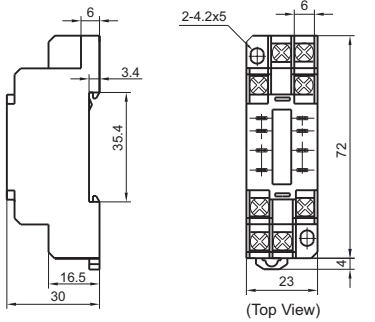


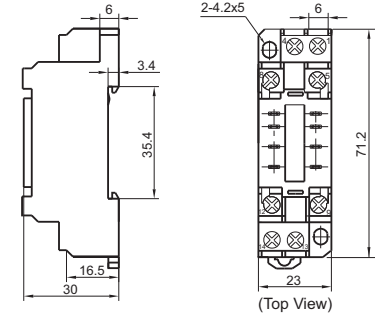


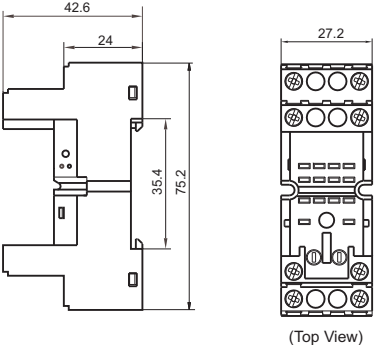


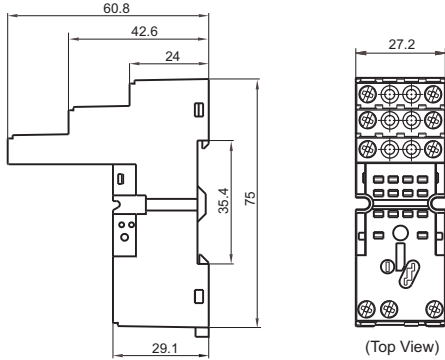


- The dielectric strength can reach 2000VAC and the insulation resistance is 1000MΩ
- Three mounting types are available: PCB mounting screw mounting and DIN rail mounting.
- With finger protection device
- Many kinds of plug-in modules are available with the function of energizing indication and wiring protection.
- Components available: retainer, marker and plug-in module
- Environmental friendly product (RoHS compliant)

CHARACTERISTICS

Type	Nominal Voltage	Nominal Current	Ambient Temperature	Dielectric Strength min.	Screw Torque	Wire Strip Length
18FF-2Z-A2	250VAC	7A	-40 °C to 70°C	2000VAC	—	—
18FF-2Z-C1	250VAC	7A	-40 °C to 70°C	2000VAC	0.8N · m	7mm
18FF-2Z-C2	250VAC	7A	-40 °C to 70°C	2000VAC	0.8N · m	7mm
18FF-2Z-C4	250VAC	7A	-40 °C to 70°C	2000VAC	0.6N · m	7mm
18FF-2Z-C5	250VAC	7A	-40 °C to 70°C	2000VAC	0.6N · m	7mm
18FF-2Z-C6	250VAC	7A	-40 °C to 70°C	2000VAC	0.6N · m	7mm
18FF-2Z-C7	250VAC	7A	-40 °C to 70°C	2000VAC	0.6N · m	7mm
18FF-2Z-C8	250VAC	7A	-40 °C to 70°C	2000VAC	0.6N · m	7mm
18FF-3Z-C1	250VAC	7A	-40 °C to 70°C	2000VAC	0.8N · m	7mm
18FF-3Z-C4	250VAC	7A	-40 °C to 70°C	2000VAC	0.6N · m	7mm
18FF-3Z-C5	250VAC	7A	-40 °C to 70°C	2000VAC	0.6N · m	7mm
18FF-4Z-A2	250VAC	7A	-40 °C to 70°C	2000VAC	—	—
18FF-4Z-C1	250VAC	7A	-40 °C to 70°C	2000VAC	0.8N · m	7mm
18FF-4Z-C2	250VAC	7A	-40 °C to 70°C	2000VAC	0.8N · m	7mm
18FF-4Z-C4	250VAC	7A	-40 °C to 70°C	2000VAC	0.6N · m	7mm
18FF-4Z-C5	250VAC	7A	-40 °C to 70°C	2000VAC	0.6N · m	7mm
18FF-4Z-C6	250VAC	7A	-40 °C to 70°C	2000VAC	0.6N · m	7mm
18FF-4Z-C7	250VAC	7A	-40 °C to 70°C	2000VAC	0.6N · m	7mm
18FF-4Z-C8	250VAC	7A	-40 °C to 70°C	2000VAC	0.6N · m	7mm

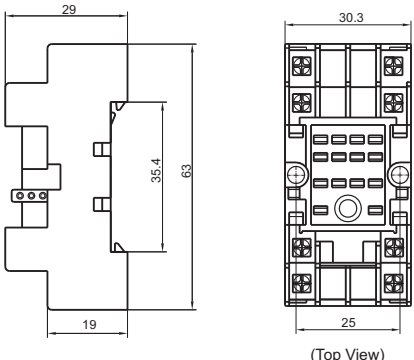


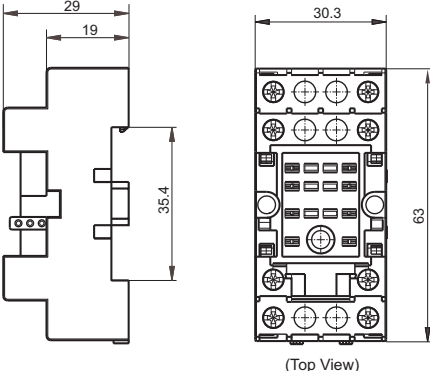


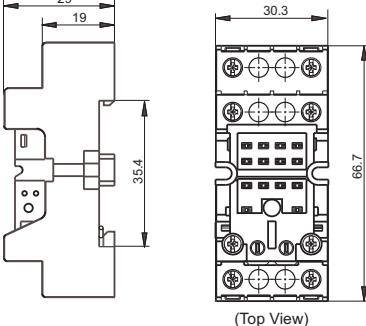


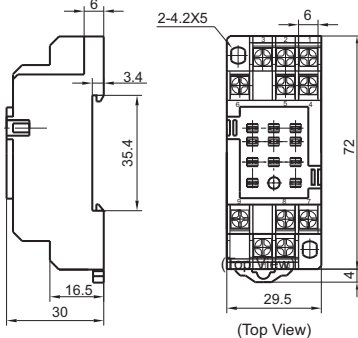


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

Socket	Outline Dimensions	Wiring Diagram	PCB Layout	Components Available
18FF-2Z-A2  PCB Terminal, PCB mounting Applicable for 2 poles	 (Top View)		 8- Ø1.3	metallic retainer 18FF-H1
18FF-2Z-C1  Screw Terminal, DIN rail or Screw mounting, Applicable for 2 poles	 (Top View)	 (Top View)	 2-Ø4.5	metallic retainer 18FF-H2 (be used in sets)
18FF-2Z-C2  Screw Terminal, DIN rail or Screw mounting, With finger protection device Applicable for 2 poles	 (Top View)	 (Top View)	 2-Ø4.5	metallic retainer 18FF-H2 (be used in sets)
18FF-2Z-C4  Screw Terminal, DIN rail or Screw mounting, With finger protection device Applicable for 2 poles	 (Top View)	 (Top View)	 2- Ø3	plastic retainer 18FF-H4 metallic retainer 18FF-H5 marker 18FF-M1 plug-in module HFAA to HFHU*
18FF-2Z-C5  Screw Terminal, DIN rail or Screw mounting, With finger protection device Applicable for 2 poles	 (Top View)	 (Top View)	 2- Ø3	plastic retainer 18FF-H4 metallic retainer 18FF-H5 marker 18FF-M1 plug-in module HFAA to HFHU*

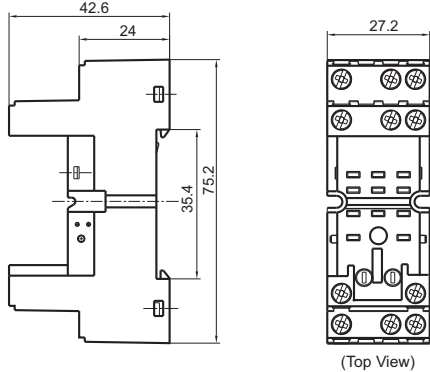


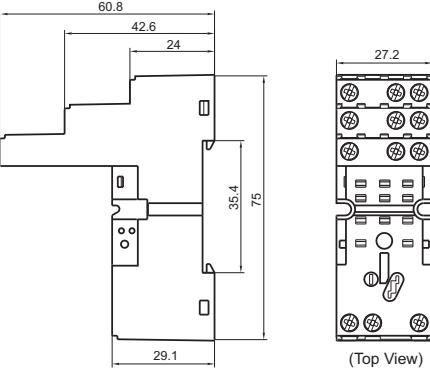


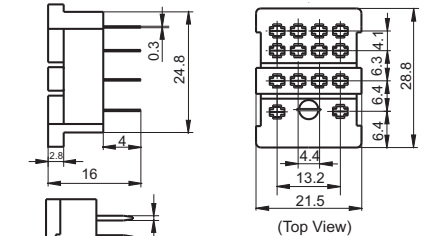

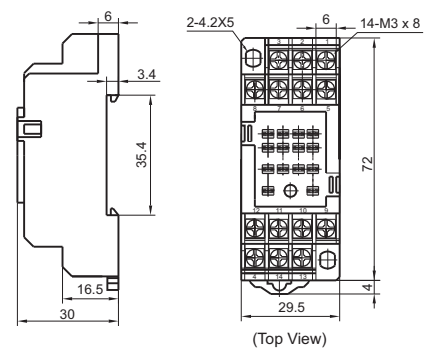


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

Socket	Outline Dimensions	Wiring Diagram	PCB Layout	Components Available
18FF-2Z-C6  Screw Terminal, DIN rail or Screw mounting, Applicable for 2 poles	 (Top View)	 (Top View)		metallic retainer 18FF-H6 (be used in sets) marker 18FF-M2
18FF-2Z-C7  Screw Terminal, DIN rail or Screw mounting, With finger protection device Applicable for 2 poles	 (Top View)	 (Top View)		metallic retainer 18FF-H5 marker 18FF-M2
18FF-2Z-C8  Screw Terminal, DIN rail or Screw mounting, With finger protection device Applicable for 2 poles	 (Top View)	 (Top View)		plastic retainer 18FF-H4 marker 18FF-M3
18FF-3Z-C1  Screw Terminal, DIN rail or Screw mounting, Without finger protection device Applicable for 3 poles	 (Top View)	 (Top View)		metallic retainer 18FF-H2 (be used in sets)

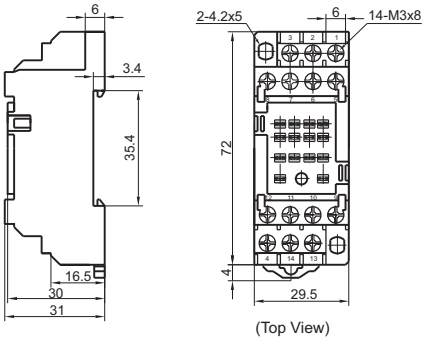


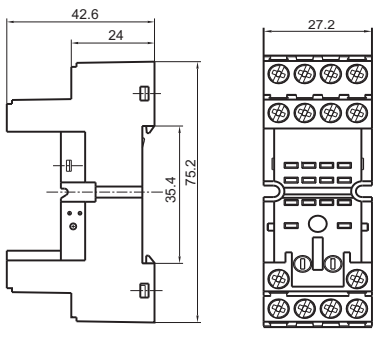


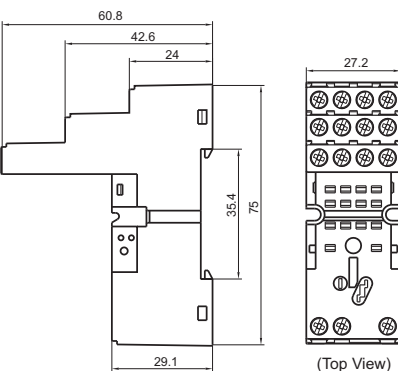


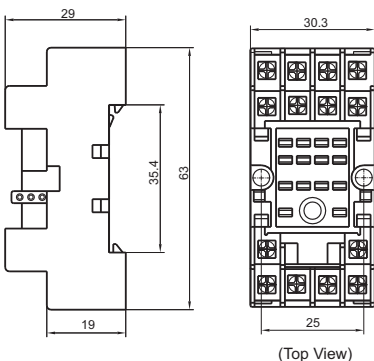


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

Socket	Outline Dimensions	Wiring Diagram	PCB Layout	Components Available
18FF-3Z-C4  Screw Terminal, DIN rail or Screw mounting, With finger protection device Applicable for 3 poles	 (Top View)	 (Top View)		plastic retainer 18FF-H4 metallic retainer 18FF-H5 marker 18FF-M1 plug-in module HFAA to HFHU*
18FF-3Z-C5  Screw Terminal, DIN rail or Screw mounting, Witht finger protection device Applicable for 3 poles	 (Top View)	 (Top View)		plastic retainer 18FF-H4 metallic retainer 18FF-H5 marker 18FF-M1 plug-in module HFAA to HFHU*
18FF-4Z-A2  PCB Terminal, PCB mounting Applicable for 4 poles	 (Top View)		 (Top View)	metallic retainer 18FF-H1
18FF-4Z-C1  Screw Terminal, DIN rail or Screw mounting, Without finger protection device Applicable for 4 poles	 (Top View)	 (Top View)		metallic retainer 18FF-H2 (be used in sets)

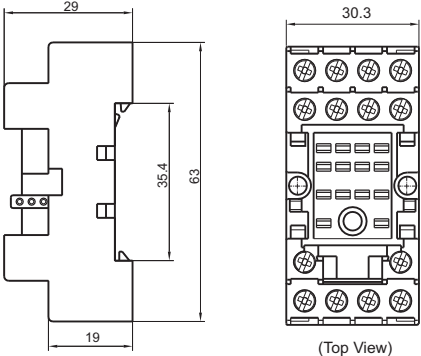


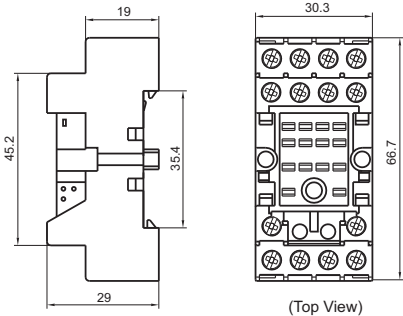


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

Socket	Outline Dimensions	Wiring Diagram	PCB Layout	Components Available
18FF-4Z-C2  Screw Terminal, DIN rail or Screw mounting, With finger protection device Applicable for 4 poles	 (Top View)	 (Top View)		metallic retainer 18FF-H2 (be used in sets)
18FF-4Z-C4  Screw Terminal, DIN rail or Screw mounting, With finger protection device Applicable for 4 poles	 (Top View)	 (Top View)		plastic retainer 18FF-H4 metallic retainer 18FF-H5 marker 18FF-M1 plug-in module HFAA to HFHU*
18FF-4Z-C5  Screw Terminal, DIN rail or Screw mounting, With finger protection device Applicable for 4 poles	 (Top View)	 (Top View)		plastic retainer 18FF-H4 metallic retainer 18FF-H5 marker 18FF-M1 plug-in module HFAA to HFHU*
18FF-4Z-C6  Screw Terminal, DIN rail or Screw mounting, Applicable for 4 poles	 (Top View)	 (Top View)		metallic retainer 18FF-H6 (be used in sets) marker 18FF-M2

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

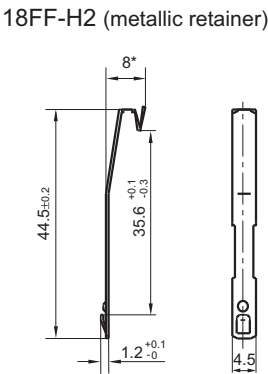
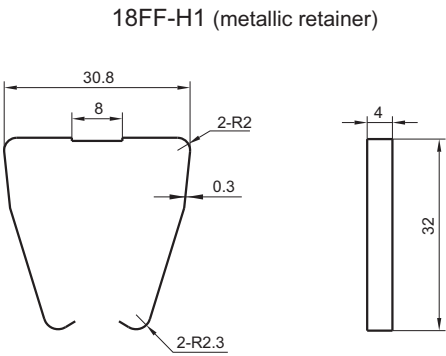
Socket	Outline Dimensions	Wiring Diagram	PCB Layout	Components Available
18FF-4Z-C7  Screw Terminal, DIN rail or Screw mounting, With finger protection device Applicable for 4 poles	 (Top View)	 (Top View)		metallic retainer 18FF-H5 marker 18FF-M2
18FF-4Z-C8  Screw Terminal, DIN rail or Screw mounting, With finger protection device Applicable for 4 poles	 (Top View)	 (Top View)		plastic retainer 18FF-H4 marker 18FF-M3

Notes: * Please refer to the product datasheet if plug-in module is required.

DIMENSION OF RELATED COMPOENT (AVAILABLE)

Unit: mm

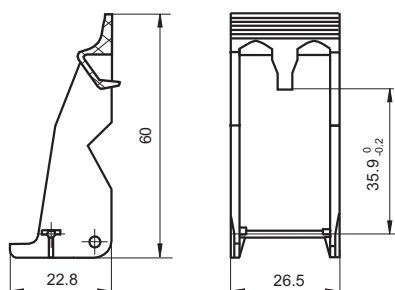


Retainer



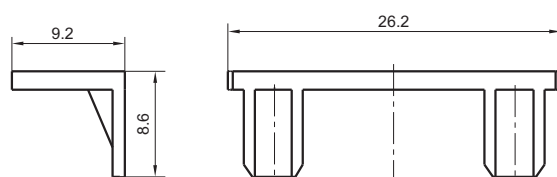
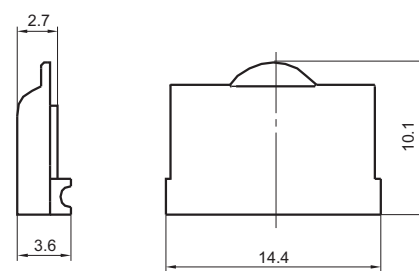
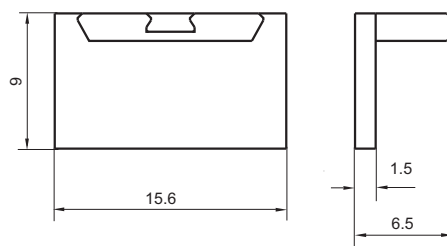
Note: 18FF-H2 retainer has to be used in sets, please pay special attention while placing the order.

DIMENSION OF RELATED COMPONENT (AVAILABLE)

Unit: mm

Retainer**18FF-H4 (plastic retainer)****18FF-H5 (metallic retainer)****18FF-H6 (metallic retainer)**

Note: 18FF-H6 retainer has to be used in sets, please pay special attention while placing the order.

Marker**18FF-M1****18FF-M2****18FF-M3****Things to be noticed when selecting sockets:**

1. Please choose suitable relay socket according to the actual mounting environment, relay contact poles and terminal layout. If there is any query on selection, please contact Hongfa for the technical service.
2. Socket which can be mounted with markers is furnished with a marker; as for other related components, they should be selected separately. Please do give clear indication of the types of relay sockets and related components you choose while placing order.
3. The above is only an example of typical socket and related component type which is suitable to HF18FF relay. If you have any special requirements, please contact us.

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.