


HF3504 / HF3507

WIPER INTERMITTENT CONTROLLER



**Typical Applications**  
Wiper intermittent control

**Features**

- Solid base design, stable structure
- Surface mounting technology, advanced craftwork
- Ingress protection: IP52

TYPE					
Type	Nominal voltage	Operating voltage range	Nominal motor load	Dimensions	Control mode
HF3504 /12-G	12VDC	9VDC to 16VDC	50W	(30 × 30 × 40)mm	special chip
HF3504A /12-G	12VDC	9VDC to 16VDC	50W	(30 × 30 × 30)mm	special chip
HF3507 /12-G	12VDC	9VDC to 16VDC	50W	(30 × 30 × 40)mm	separated chip
HF3507 /24-G	24VDC	18VDC to 32VDC	80W	(30 × 30 × 40)mm	separated chip


CHARACTERISTICS		
Wiping time	3.5s ± 2.5s	
Intermittent time	5.5s ± 1.5s	
Electrical endurance	1×10 <sup>5</sup> OPS (nominal motor load)	
Internal voltage drop	150mV max. (at 5A)	
Ambient temperature	-40°C to 85°C	
Vibration resistance	Sine	10Hz to 200Hz 49m/s <sup>2</sup>
	Random	10Hz to 1000Hz 19.6m/s <sup>2</sup>
Shock resistance		196m/s <sup>2</sup>
Weight		Approx. 30g
Mechanical data		Cover retention: 160N min.
		Terminal retention: 100N min.

ORDERING INFORMATION				
Type	HF3504 / HF3504A / HF3507 / Suffix(A-Z) is for specific extending application	12	-G	-B (XXX)
Nominal voltage	12: 12VDC    24: 24VDC			
Trigger level	G: High level start-up    L: Low level start-up			
Packing style	B: With bracket    Nil: Without bracket			
Customer special code				


OUTLINE DIMENSIONS, WIRING DIAGRAM

Unit: mm

Outline Dimensions

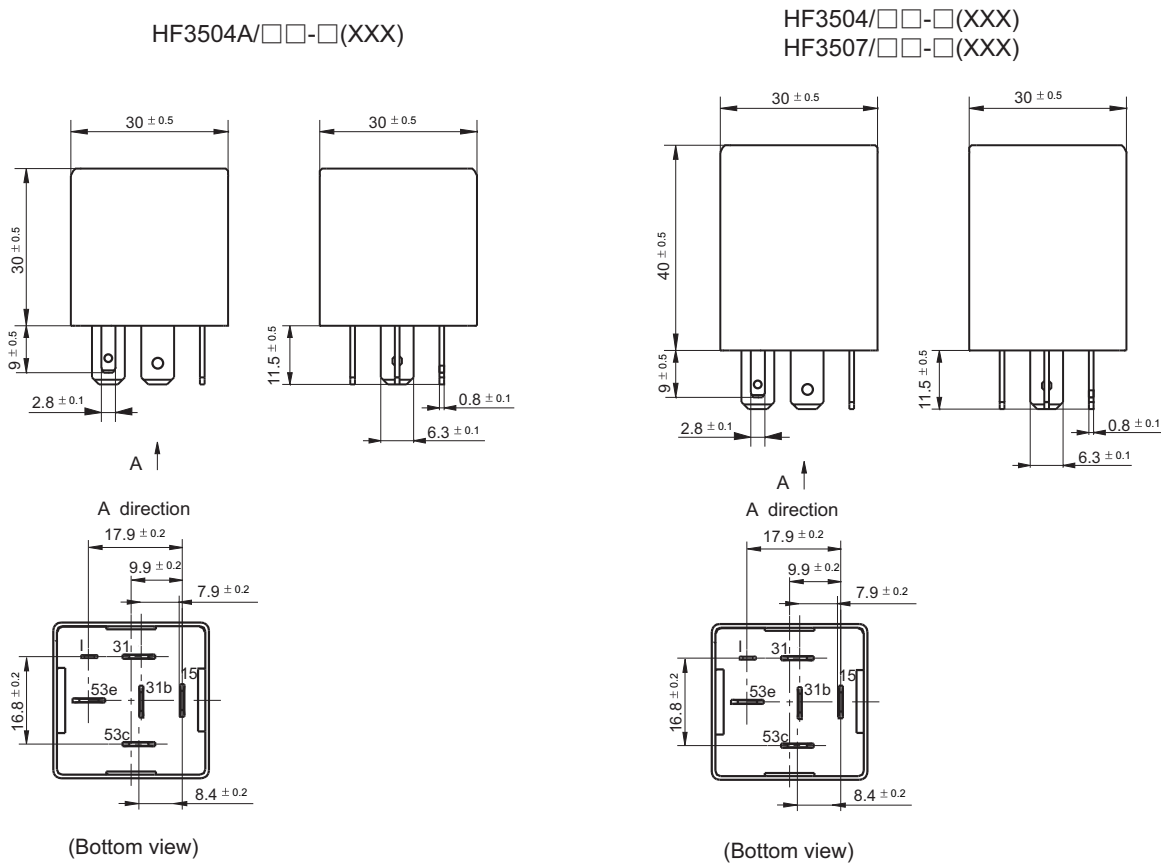

Wiring Diagram

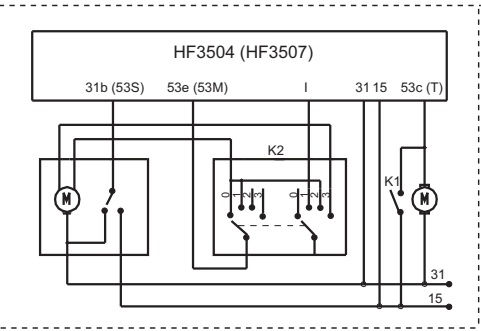

- 1) As shown on left circuit, the terminal 15 is connected with positive electrode of power supply, terminal 31 is connected with negative electrode of power supply, the terminal I and 53e are connected with combined switch, the terminal 31b is connected with wiper motor switch, the terminal 53c is connected with washing bump switch.
- 2) Intermit wiping, when combined switch K2 is at position 2, the terminal I will receive 12V voltage, the internal relay will start function, the terminal 53e and 15 will be connected, the wiper motor will start to work, when terminal 31b receive the feedback signal from 0V, the internal relay will release and the terminal 53e and 15 will be opened, the wiper motor will stop and will remain at stop position. The above process will repeat after 5.5s ± 1.5s.
- 3) Washing wiping, when K1 is closed, the terminal 53c will receive 12V voltage, the internal relay will start function, the terminal 53e and 15 will be connected, the wiper motor will start to work, when K1 is opened and delayed for 3.5s + 2.5s, the internal relay will release and the wiper motor will stop and will remain at stop position.

**Disclaimer**  
This datasheet is for the customers' reference. All the specifications are subject to change without notice.  
We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.