

DIODE MODULE (F.R.D.)

FRD/FDS100BA60



UL;E76102 (M)

FRD (FDS)100BA is a high speed (fast recovery) dual diode module designed for high power switching application. FRD (FDS) 100BA is suitable for high frequency application requiring low loss and high speed control.

- High Speed $t_{rr} \leq 100ns$
- $I_{F(AV)}$ 100A (each device)
- Isolated mounting construction.
- High Surge Capability

(Applications)

Switching Power Supply, Inverter Welding Power Supply
Power Supply for Telecommunication

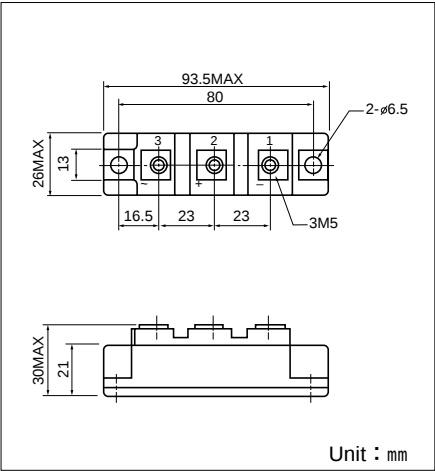

Maximum Ratings

(T_j=25°C unless otherwise specified)

Symbol	Item	Ratings	Unit
V _{RRM}	Repetitive Peak Reverse Voltage	600	V
V _{R(DC)}	D.C. Reverse Voltage	480	V

Symbol	Item		Conditions	Ratings	Unit
I _F	Forward Current		D.C. T _c : 94°C	100	A
I _{FSM}	Surge Forward Current		1/2 cycle, 60Hz, peak value, non-repetitive	2000	A
I ² _t	I ² _t		Value for One cycle of surge curent	16700	A²S
T _j	Operating Junction Temperature			−40 to +150	°C
T _{stg}	Storage Temperature			−40 to +125	°C
V _{iso}	Isolation Breakdown Voltage (R.M.S.)		A.C. 1 minute	2500	V
	Mounting Torque	Mounting(M6)	Recommended Value 2.5-3.9 (25-40)	4.7 (48)	Nm (kgf·cm)
		Terminal (M5)	Recommended Value 1.5-2.5 (15-25)	2.7 (28)	
	Mass			170	g

Electrical Characteristics

Symbol	Item	Conditions	Ratings		Unit
			Typ.	Max.	
I _{RRM}	Repetitive Peak Reverse Current, max.	V _R =V _{RRM} , T _j =125°C		100	mA
V _{FM}	Forward Voltage Drop, max.	Forward current 100A, Inst. measurement	1.15	1.3	V
R _{th(j-c)}	Thermal Impedance, max.	Junction to case		0.4	°C/W
t _{rr}	Reverse Recovery Time, max.	I _F =100A, di/dt=−100A/μs	85	100	ns



50 Seaview Blvd. Port Washington, NY 11050-4618 PH.(516)625-1313 FAX(516)625-8845 E-mail: semi@sanrex.com

FRD/FDS100BA60