

HF141FF

MINIATURE HIGH POWER RELAY


File No.:E133481


File No.:CQC09002034351



Features

- 10A switching capability
- 5kV dielectric strength (between coil and contacts)
- Sockets available
- 1 Form A ,1 Form B and 1 Form C configurations
- Plastic sealed and flux proofed types available
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (29.0 x 12.6 x 20.6) mm

CONTACT DATA		
Contact arrangement	1A, 1B, 1C	
Contact resistance	50mΩ max.(at 1A 6VDC)	
Contact material	AgSnO ₂ , AgCdO	
Contact rating (Res.load)	Standard	High Capacity
	8A 250VAC /30VDC 10A 125VAC	10A 30VDC 10A 250VAC
Max. switching power	2000VA / 240W	2500VA / 300W
Max. switching current	10A	
Max. switching voltage	250VAC / 30VDC	
Mechanical endurance	1 x 10 ⁷ OPS	
Electrical endurance	1 x 10 ⁵ OPS	

CHARACTERISTICS		
Insulation resistance		1000MΩ (at 500VDC)
Dielectric strength	Between coil & contacts	5000VAC 1min
	Between open contacts	1000VAC 1min
Operate time (at nomi. volt.)		15ms max.
Release time (at nomi. volt.)		5ms max.
Vibration resistance		10Hz to 55Hz 1.5mm DA
Shock resistance	Functional	98m/s ²
	Destructive	980m/s ²
Humidity		5% to 85% RH
Ambient temperature		-40°C to 70°C
Termination		PCB
Unit weight		Approx. 13g
Construction		Plastic sealed, Flux proofed

Notes: 1) The data shown above are initial values.
2) Please find coil temperature curve in the characteristic curves below.
3) UL insulation system: Class A

COIL	
Coil power	Standard: Approx. 720mW;
	Sensitive: Approx. 550mW

COIL DATA					at 23°C
Standard type					
Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Allowable Voltage VDC	Coil Resistance Ω	
5	4.0	0.5	6.5	36 x (1±10%)	
6	4.8	0.6	7.8	50 x (1±10%)	
9	7.2	0.9	11.7	115 x (1±10%)	
12	9.6	1.2	15.6	200 x (1±10%)	
18	14.4	1.8	23.4	460 x (1±10%)	
24	19.2	2.4	31.2	820 x (1±10%)	
48	38.4	4.8	62.4	3300 x (1±10%)	

Sensitive type				
Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Allowable Voltage VDC	Coil Resistance Ω
5	4.0	0.5	6.5	47 x (1±10%)
6	4.8	0.6	7.8	68 x (1±10%)
9	7.2	0.9	11.7	155 x (1±10%)
12	9.6	1.2	15.6	270 x (1±10%)
18	14.4	1.8	23.4	620 x (1±10%)
24	19.2	2.4	31.2	1100 x (1±10%)
48	38.4	4.8	62.4	4400 x (1±10%)

Notes: When requiring pick-up voltage < 80% of nominal voltage, special order allowed.

SAFETY APPROVAL RATINGS

UL/CUL	High Capacity	10A 30VDC/250VAC
	Standard	8A 30VDC/250VAC 10A 125VAC

Notes: Only some typical ratings are listed above. If more details are required, please contact us.


ORDERING INFORMATION

Type	HF141FF / 012 -H S P G (XXX)				
Coil voltage	5, 6, 9, 12, 18, 24, 48VDC				
Contact arrangement	H:1 Form A	D:1 Form B	Z:1 Form C		
Construction ¹⁾	S: Plastic sealed Nil: Flux proofed				
Coil power	P: Standard Nil: Sensitive				
Contact capacity	G: High capacity (AgSnO ₂) Nil: Standard type (AgCdO)				
Customer special code					

Notes: 1) Under the ambience with dangerous gas like H₂S, SO₂ or NO₂, plastic sealed type is recommended; Please test the relay in real applications.
If the ambience allows, flux proofed type is preferentially recommended.
If water cleaning is required after the relay is assembled on PCB, please contact us for suggestion about suitable parts.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT Unit: mm

Outline Dimensions

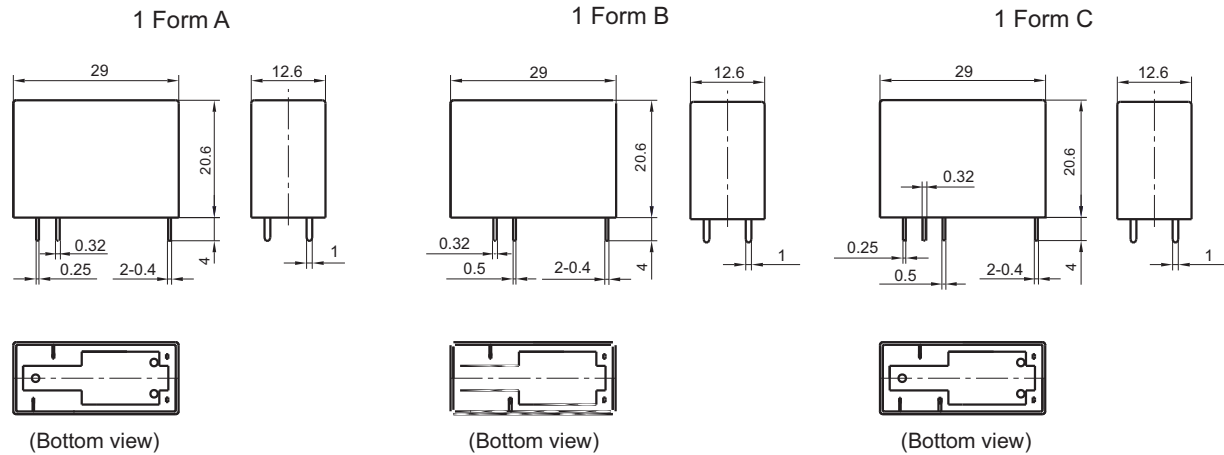


Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤1mm, tolerance should be ±0.2mm; outline dimension >1mm and ≤5mm, tolerance should be ±0.3mm; outline dimension >5mm, tolerance should be ±0.4mm.
2) The tolerance without indicating for PCB layout is always ±0.1mm.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

PCB Layout (Bottom view)

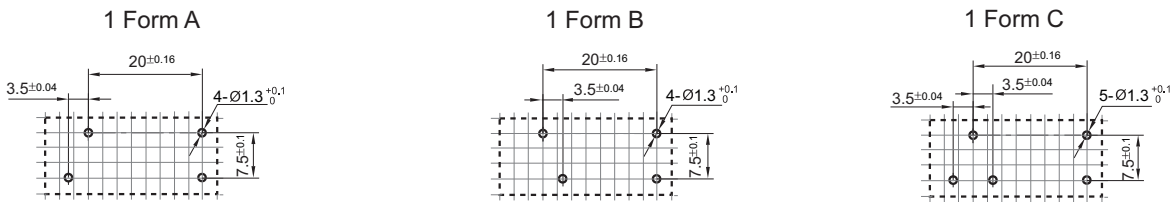


Remark: The width of the gridding is 2.5mm.

Wiring Diagram (Bottom view)



CHARACTERISTIC CURVES

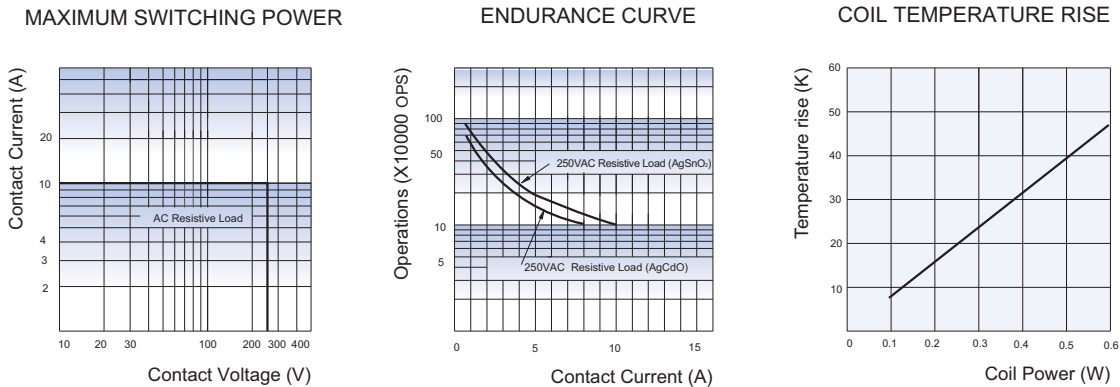

Disclaimer
This datasheet is for the customers' reference. All the specifications are subject to change without notice.
We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.