

MITSUBISHI IGBT MODULES CM100RX-12A

HIGH POWER SWITCHING USE

CM100RX-12A




- Ic 100A
- VCES 600V
- 7pack (3-phase Inverter + Brake)
- Flatbase Type / Insulated Package / Copper (non-plating) base plate
- RoHS Directive compliant

APPLICATION

General purpose Inverters, Servo Amplifiers

OUTLINE DRAWING & CIRCUIT DIAGRAM

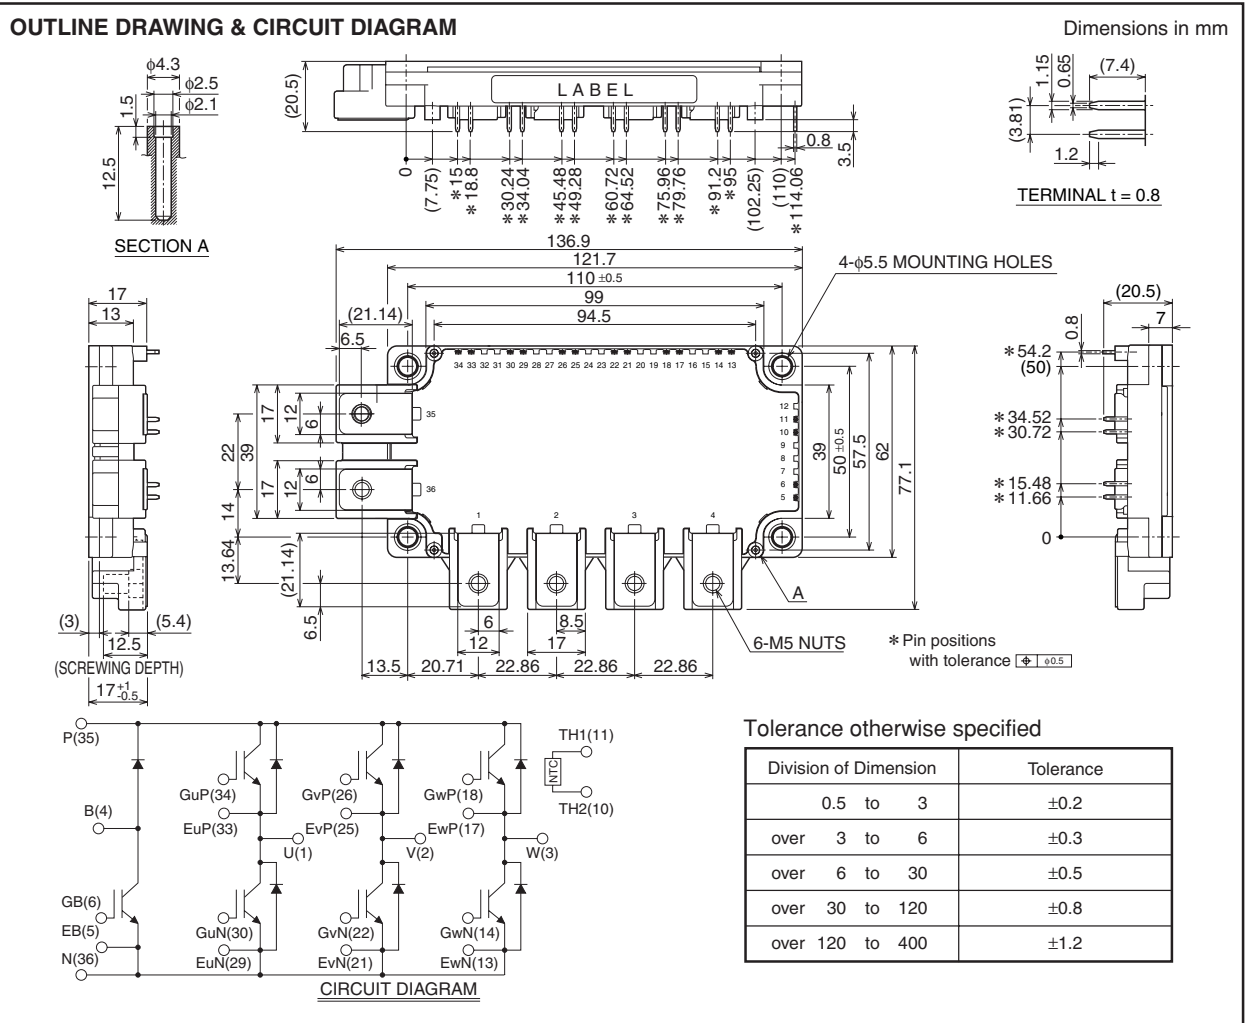

MITSUBISHI IGBT MODULES

CM100RX-12A

HIGH POWER SWITCHING USE

ABSOLUTE MAXIMUM RATINGS ($T_j = 25^\circ\text{C}$, unless otherwise specified)

INVERTER PART

Symbol	Parameter	Conditions	Rating	Unit
V _{CES}	Collector-emitter voltage	G-E Short	600	V
V _{GES}	Gate-emitter voltage	C-E Short	±20	
I _C	Collector current	DC, T _c = 75°C (Note. 1)	100	A
I _{CRM}		Pulse (Note. 4)	200	
P _C	Maximum collector dissipation	T _c = 25°C (Note. 1, 5)	400	W
I _E (Note.3)	Emitter current	T _c = 25°C (Note. 1)	100	A
I _{ERM} (Note.3)	(Free wheeling diode forward current)	Pulse (Note. 4)	200	


BRAKE PART

Symbol	Parameter	Conditions	Rating	Unit
V _{CES}	Collector-emitter voltage	G-E Short	600	V
V _{GES}	Gate-emitter voltage	C-E Short	±20	
I _C	Collector current	DC, T _c = 97°C (Note. 1)	50	A
I _{CRM}		Pulse (Note. 4)	100	
P _C	Maximum collector dissipation	T _c = 25°C (Note. 1, 5)	280	W
V _{RRM} (Note.3)	Repetitive peak reverse voltage		600	V
I _F (Note.3)	Forward current	T _c = 25°C (Note. 1)	50	A
I _{FRM} (Note.3)		Pulse (Note. 4)	100	

MODULE

Symbol	Parameter	Conditions	Rating	Unit
T _j	Junction temperature		-40 ~ +150	°C
T _{stg}	Storage temperature		-40 ~ +125	
V _{iso}	Isolation voltage	Terminals to base plate, f = 60Hz, AC 1 minute	2500	V _{rms}
—	Base plate flatness	On the centerline X, Y (Note. 8)	±0 ~ +100	μm
—	Torque strength	Main terminals M5 screw	2.5 ~ 3.5	N·m
—	Torque strength	Mounting M5 screw	2.5 ~ 3.5	
—	Weight	(Typical)	330	g

Note. 8: The base plate flatness measurement points are in the following figure.

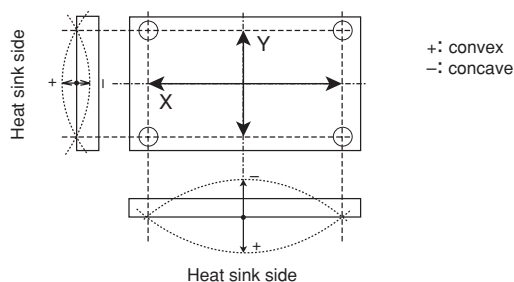

Jan. 2009

MITSUBISHI IGBT MODULES

CM100RX-12A

HIGH POWER SWITCHING USE

ELECTRICAL CHARACTERISTICS ($T_j = 25^\circ\text{C}$, unless otherwise specified)

INVERTER PART

Symbol	Parameter	Conditions	Limits			Unit	
			Min.	Typ.	Max.		
ICES	Collector cutoff current	$V_{CE} = V_{CES}, V_{GE} = 0V$	—	—	1	mA	
$V_{GE(th)}$	Gate-emitter threshold voltage	$I_C = 10mA, V_{CE} = 10V$	5	6	7	V	
IGES	Gate leakage current	$\pm V_{GE} = V_{GES}, V_{CE} = 0V$	—	—	0.5	μA	
$V_{CE(sat)}$	Collector-emitter saturation voltage	$I_C = 100A, V_{GE} = 15V$ (Note. 6)	$T_j = 25^\circ\text{C}$	—	1.7	2.1	V
			$T_j = 125^\circ\text{C}$	—	1.9	—	
			Chip	—	1.6	—	
C_{ies}	Input capacitance	$V_{CE} = 10V$ $V_{GE} = 0V$ (Note. 6)		—	—	13.3	nF
C_{oes}	Output capacitance			—	—	1.4	
C_{res}	Reverse transfer capacitance			—	—	0.45	
QG	Total gate charge	$V_{CC} = 300V, I_C = 100A, V_{GE} = 15V$	—	270	—	nC	
$t_{d(on)}$	Turn-on delay time	$V_{CC} = 300V, I_C = 100A$	—	—	100	ns	
t_r	Turn-on rise time	$V_{GE} = \pm 15V, R_G = 6.2\Omega$	—	—	100		
$t_{d(off)}$	Turn-off delay time	Inductive load	—	—	300		
t_f	Turn-off fall time		—	—	600		
t_{rr} (Note.3)	Reverse recovery time		—	—	200		
Q_{rr} (Note.3)	Reverse recovery charge	($I_E = 100A$)	—	4.8	—	μC	
V_{EC} (Note.3)	Emitter-collector voltage	$I_E = 100A, V_{GE} = 0V$ (Note. 6)	$T_j = 25^\circ\text{C}$	—	2.0	2.8	V
			$T_j = 125^\circ\text{C}$	—	1.95	—	
			Chip	—	1.9	—	
$R_{th(j-c)Q}$	Thermal resistance (Junction to case) (Note. 1)	per IGBT	—	—	0.31	K/W	
$R_{th(j-c)R}$		per free wheeling diode	—	—	0.59		
R_{Gint}	Internal gate resistance	$T_C = 25^\circ\text{C}$, per switch	—	0	—	Ω	
R_G	External gate resistance		6	—	62		

BRAKE PART

Symbol	Parameter	Conditions	Limits			Unit	
			Min.	Typ.	Max.		
ICES	Collector cutoff current	$V_{CE} = V_{CES}, V_{GE} = 0V$	—	—	1	mA	
$V_{GE(th)}$	Gate-emitter threshold voltage	$I_C = 5mA, V_{CE} = 10V$	5	6	7	V	
IGES	Gate leakage current	$\pm V_{GE} = V_{GES}, V_{CE} = 0V$	—	—	0.5	μA	
$V_{CE(sat)}$	Collector-emitter saturation voltage	$I_C = 50A, V_{GE} = 15V$ (Note. 6)	$T_j = 25^\circ\text{C}$	—	1.7	2.1	V
			$T_j = 125^\circ\text{C}$	—	1.9	—	
			Chip	—	1.6	—	
C_{ies}	Input capacitance	$V_{CE} = 10V$ $V_{GE} = 0V$ (Note. 6)		—	—	9.3	nF
C_{oes}	Output capacitance			—	—	1.0	
C_{res}	Reverse transfer capacitance			—	—	0.3	
QG	Total gate charge	$V_{CC} = 300V, I_C = 50A, V_{GE} = 15V$	—	200	—	nC	
I_{RRM} (Note.3)	Repetitive peak reverse current	$V_R = V_{RRM}$	—	—	1	mA	
V_{FM} (Note.3)	Forward voltage drop	$I_F = 50A$ (Note. 6)	$T_j = 25^\circ\text{C}$	—	2.0	2.8	V
			$T_j = 125^\circ\text{C}$	—	1.95	—	
			Chip	—	1.9	—	
$R_{th(j-c)Q}$	Thermal resistance (Junction to case) (Note. 1)	per IGBT	—	—	0.44	K/W	
$R_{th(j-c)R}$		per Clamp diode	—	—	0.85		
R_{Gint}	Internal gate resistance	$T_C = 25^\circ\text{C}$	—	0	—	Ω	
R_G	External gate resistance		13	—	130		

Jan. 2009

MITSUBISHI IGBT MODULES

CM100RX-12A

HIGH POWER SWITCHING USE

NTC THERMISTOR PART

Symbol	Parameter	Conditions	Limits			Unit
			Min.	Typ.	Max.	
R	Zero power resistance	Tc = 25°C	4.85	5.00	5.15	kΩ
ΔR/R	Deviation of resistance	Tc = 100°C, R100 = 493Ω	-7.3	—	+7.8	%
B(25/50)	B constant	Approximate by equation (Note. 7)	—	3375	—	K
P25	Power dissipation	Tc = 25°C	—	—	10	mW

MODULE

Symbol	Parameter	Conditions	Limits			Unit
			Min.	Typ.	Max.	
R _{th(c-f)}	Contact thermal resistance (Case to fin) (Note. 1)	Thermal grease applied per 1 module (Note. 2)	—	0.015	—	K/W

Note. 1: Case temperature (T_C), heat sink temperature (T_f) measured point is just under the chips. (Refer to the figure of the chip location.)

2: Typical value is measured by using thermally conductive grease of λ = 0.9W/(m·K).

3: I_E, I_{ERM}, V_{EC}, t_{rr} and Q_{rr} represent ratings and characteristics of the anti-parallel, emitter-collector free wheeling diode (FWDi).

I_F, I_{FRM}, V_F, V_{RRM} and I_{RRM} represent ratings and characteristics of the Clamp diode of Brake part.

4: Pulse width and repetition rate should be such that the device junction temperature (T_j) dose not exceed T_{jmax} rating.

5: Junction temperature (T_j) should not increase beyond 150°C.

6: Pulse width and repetition rate should be such as to cause negligible temperature rise.

(Refer to the figure of the test circuit for V_{CE(sat)} and V_{EC})


$$7: B_{(25/50)} = \ln\left(\frac{R_{25}}{R_{50}}\right) \left(\frac{1}{T_{25}} - \frac{1}{T_{50}} \right)$$

R₂₅: resistance at absolute temperature T₂₅ [K]; T₂₅ = 25 [°C]+273.15 = 298.15 [K]

R₅₀: resistance at absolute temperature T₅₀ [K]; T₅₀ = 50 [°C]+273.15 = 323.15 [K]

Chip Location (Top view)

Dimensions in mm (tolerance: ±1mm)

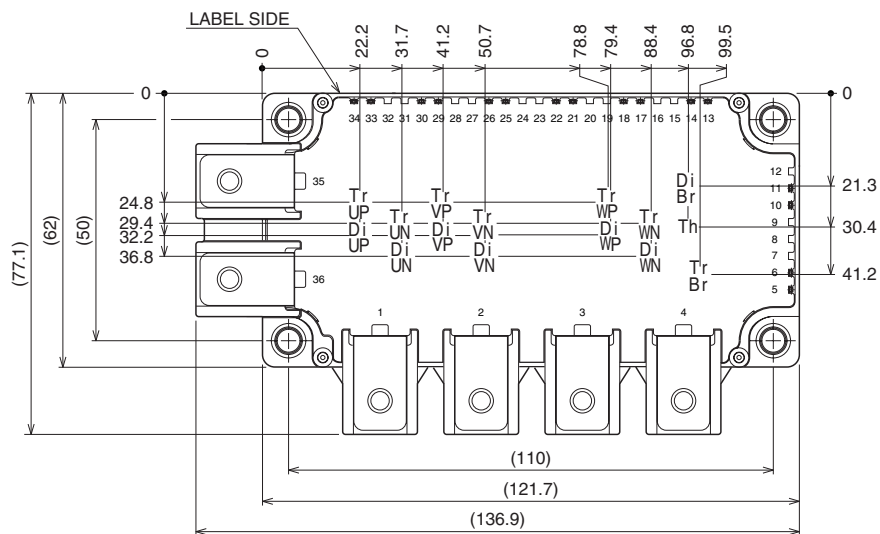


Each mark points the center position of each chip. Tr**: IGBT, Di**: FWDi (DiBr: Clamp diode), Th: NTC thermistor

Jan. 2009


MITSUBISHI IGBT MODULES

CM100RX-12A


HIGH POWER SWITCHING USE

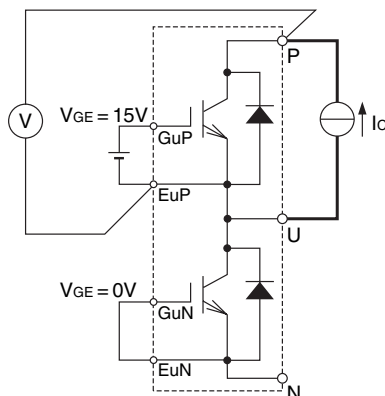

P side Inverter part Tr
(example of U arm)
 $V_{GE} = 0V(GvP-EvP, GwP-EwP, GvN-EvN, GwN-EwN, GB-EB)$

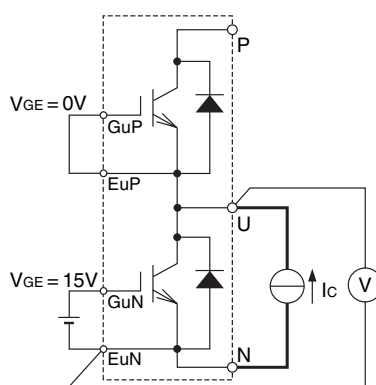


N side Inverter part Tr
(example of U arm)
 $V_{GE} = 0V(GvP-EvP, GwP-EwP, GvN-EvN, GwN-EwN, GB-EB)$

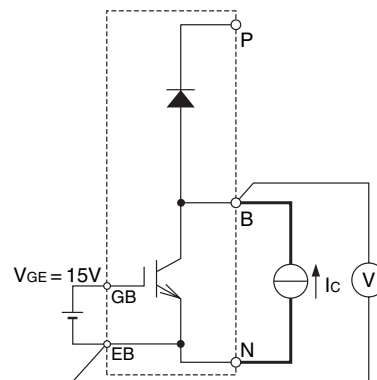


Br Tr
 $V_{GE} = 0V(GuP-EuP, GvP-EvP, GwP-EwP, GuN-EuN, GvN-EvN, GwN-EwN)$


VCE(sat) test circuit

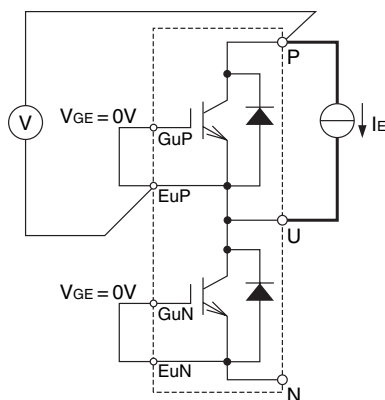

P side Inverter part Di
(example of U arm)
 $V_{GE} = 0V(GvP-EvP, GwP-EwP, GvN-EvN, GwN-EwN, GB-EB)$

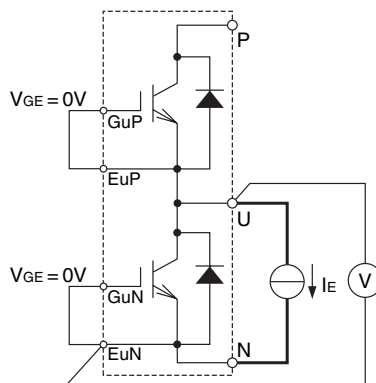


N side Inverter part Di
(example of U arm)
 $V_{GE} = 0V(GvP-EvP, GwP-EwP, GvN-EvN, GwN-EwN, GB-EB)$


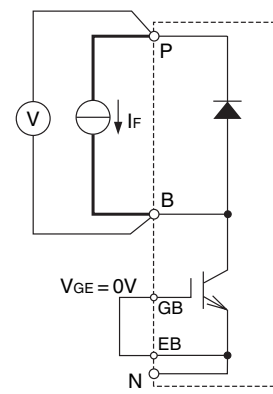


Br Di
 $V_{GE} = 0V(GuP-EuP, GvP-EvP, GwP-EwP, GuN-EuN, GvN-EvN, GwN-EwN)$

VEC/VFM test circuit

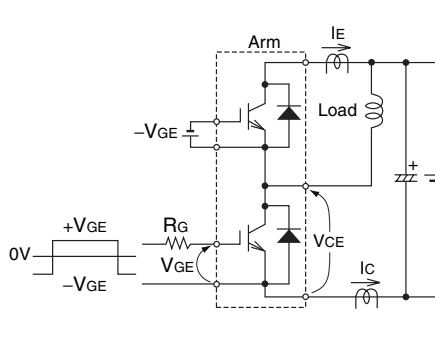

Switching time test circuit and waveforms

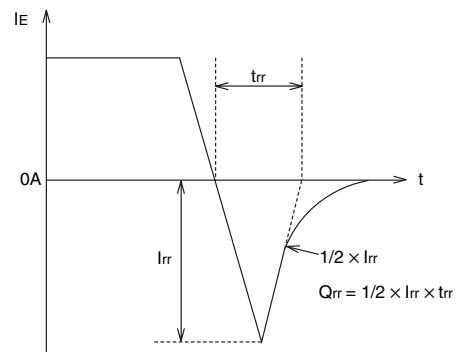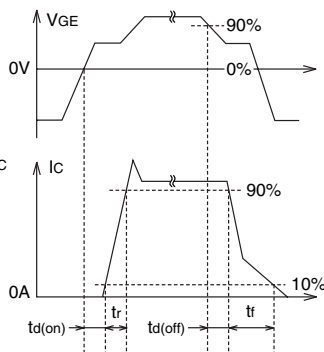







trr, Qrr test waveform

MITSUBISHI IGBT MODULES

CM100RX-12A

HIGH POWER SWITCHING USE

PERFORMANCE CURVES

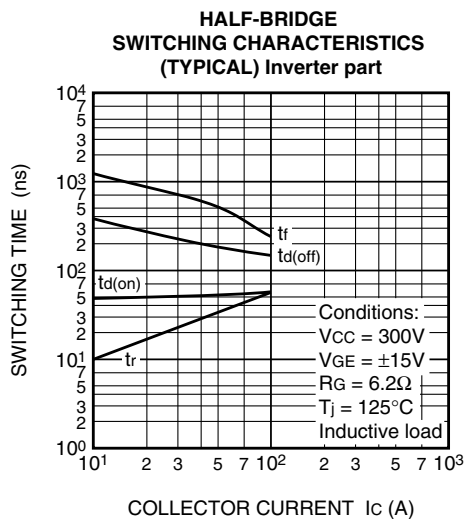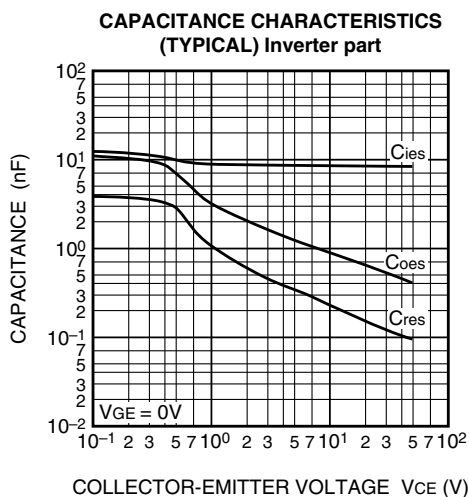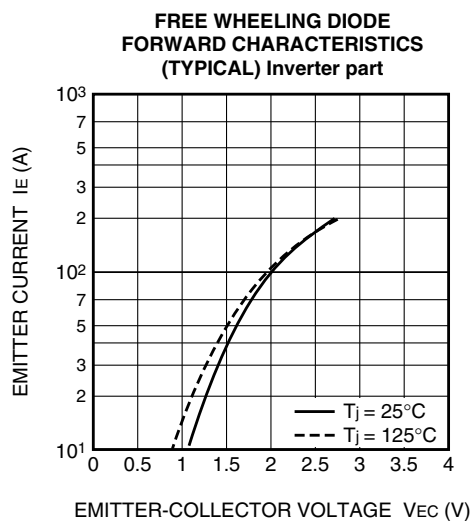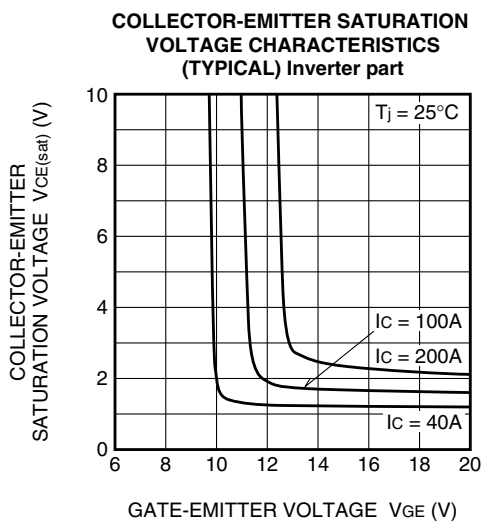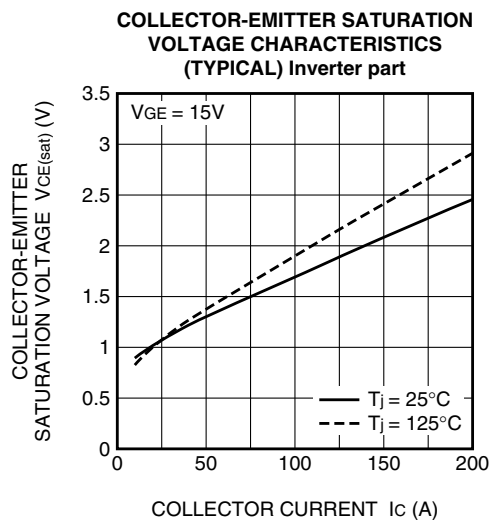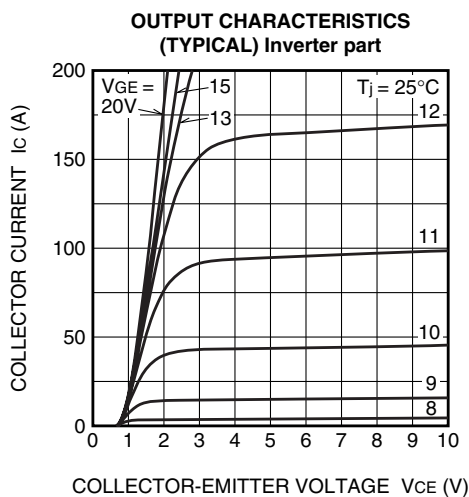


MITSUBISHI IGBT MODULES


CM100RX-12A

HIGH POWER SWITCHING USE


HALF-BRIDGE SWITCHING CHARACTERISTICS (TYPICAL) Inverter part

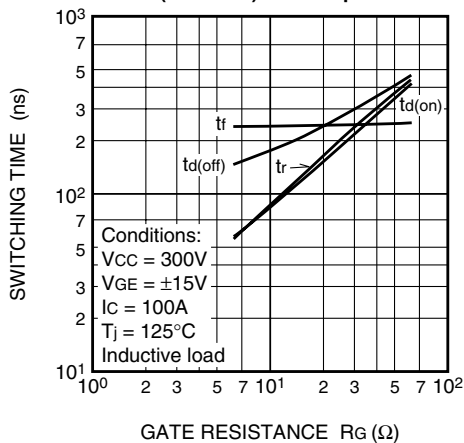


HALF-BRIDGE SWITCHING CHARACTERISTICS (TYPICAL) Inverter part

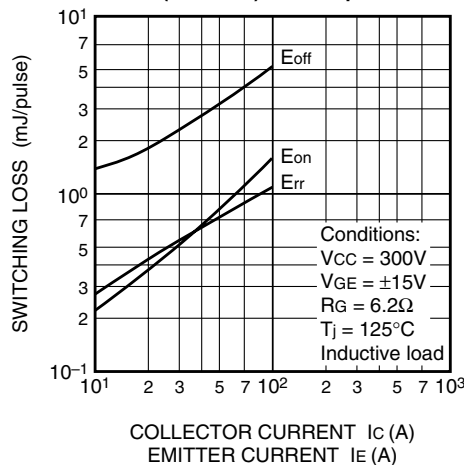


HALF-BRIDGE SWITCHING CHARACTERISTICS (TYPICAL) Inverter part

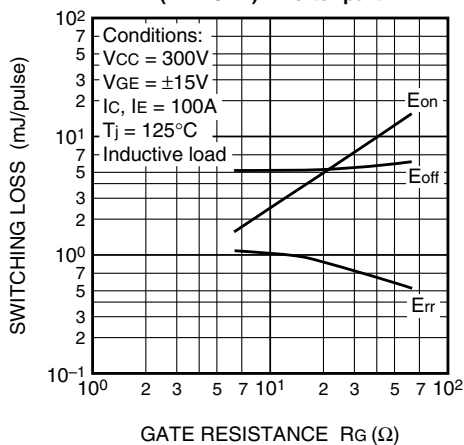


REVERSE RECOVERY CHARACTERISTICS OF FREE WHEELING DIODE (TYPICAL) Inverter part

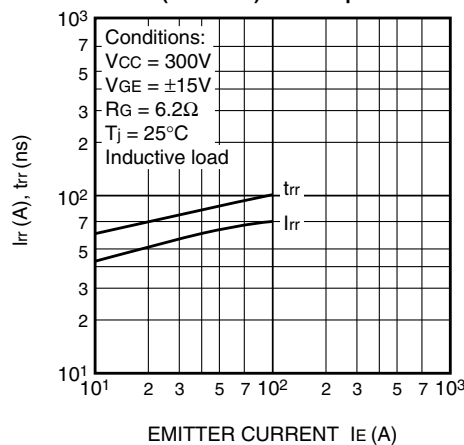

GATE CHARGE CHARACTERISTICS (TYPICAL) Inverter part

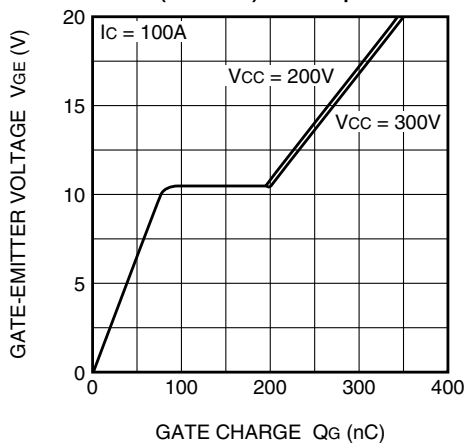



TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS

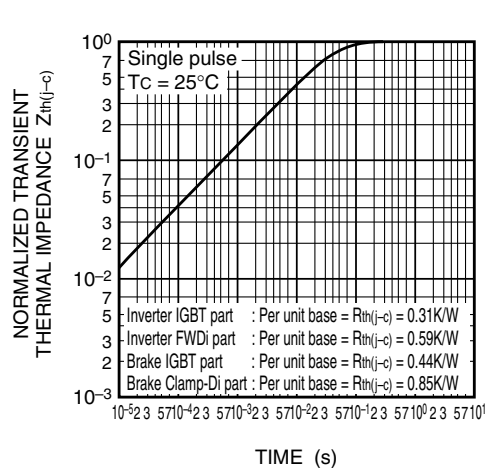

MITSUBISHI IGBT MODULES

CM100RX-12A

HIGH POWER SWITCHING USE

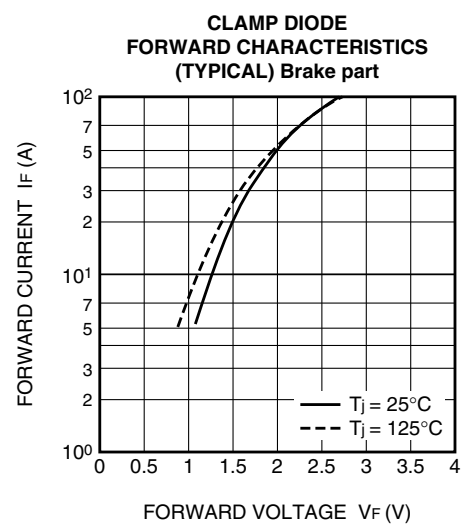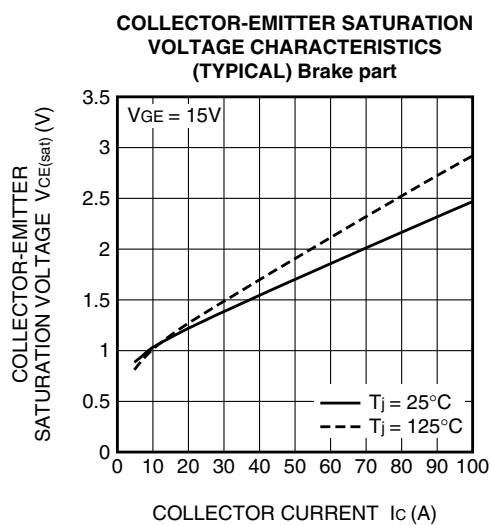

Jan. 2009