

HF32F

SUBMINIATURE INTERMEDIATE POWER RELAY



File No.: E134517



File No.: 40012204



File No.: CQC08002027011



Features

- 10A switching capability
- 1 Form A and 1 Form C configurations
- Subminiature, standard PCB layout
- Plastic sealed and flux proofed types available
- UL insulation system: Class F
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (18.4 x 10.2 x 15.3) mm

CONTACT DATA			
Contact arrangement	1A, 1C		
Contact resistance	100mΩ max. (at 1A 6VDC)		
Contact material	AgNi, AgCdO		
Contact rating (Res. load)	1A		1C
	Standard	Sensitive	Standard
	H: 5A 250VAC 5A 30VDC 10A 125VAC	HL: 3A 250VAC 3A 30VDC HLQ: 8A 250VAC	3A 250VAC 3A 30VDC
			3A 30VDC
Max. switching voltage	250VAC / 30VDC		
Max. switching current	10A		
Max. switching power	1250VA / 150W		
Mechanical endurance	1 x 10 ⁷ OPS		
Electrical endurance	1 x 10 ⁵ OPS		

CHARACTERISTICS		
Insulation resistance		1000MΩ (at 500VDC)
Dielectric strength	Between coil & contacts	2500VAC 1min
	Between open contacts	1000VAC 1min
Operate time (at nomi. volt.)		8ms max.
Release time (at nomi. volt.)		5ms max.
Humidity		5% to 85% RH
Ambient temperature	Standard	-40°C to 70°C
	High capacity	-40°C to 70°C
Shock resistance	Functional	98m/s ²
	Destructive	980m/s ²
Vibration resistance		10Hz to 55Hz 1.5mm DA
Termination		PCB
Unit weight		Approx. 6g
Construction		Plastic sealed, Flux proofed

Notes: 1) The data shown above are initial values.
2) Please find coil temperature curve in the characteristic curves below.
3) In order to obtain better electrical endurance, it's better not use this product in the high temperature environment.

COIL	
Coil power	Standard: Approx. 450mW; Sensitive: Approx.200mW

COIL DATA					at 23°C
Standard type					
Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Allowable Voltage VDC	Coil Resistance Ω	
3	2.25	0.15	3.9	20 x (1±10%)	
5	3.75	0.25	6.5	55 x (1±10%)	
6	4.50	0.30	7.8	80 x (1±10%)	
9	6.75	0.45	11.7	180 x (1±10%)	
12	9.00	0.60	15.6	320 x (1±10%)	
18	13.5	0.90	23.4	720 x (1±10%)	
24	18.0	1.20	31.2	1280 x (1±10%)	
48	36.0	2.40	62.4	5120 x (1±10%)	

Sensitive type (Only for 1 Form A)				
Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Allowable Voltage VDC	Coil Resistance Ω
3	2.25	0.15	4.5	45 x (1±10%)
5	3.75	0.25	7.5	125 x (1±10%)
6	4.50	0.30	9.0	180 x (1±10%)
9	6.75	0.45	13.5	400 x (1±10%)
12	9.00	0.60	18.0	720 x (1±10%)
18	13.5	0.90	27.0	1600 x (1±10%)
24	18.0	1.20	36.0	2800 x (1±10%)
48	36.0	2.40	72.0	11520 x (1±10%)

SAFETY APPROVAL RATINGS

UL/CUL	1 Form A	AgCdO, AgNi	H type: 5A 250VAC /30VDC at 70°C 10A 125VAC at 70°C HL type: 3A 250VAC /30VDC at 70°C
		AgCdO	H type: 1/10HP 125VAC at 70°C 1/6HP 250VAC at 70°C 10LRA /1.5FLA 120VAC at 70°C HL type: 5A 125VAC at 70°C
		AgNi	H(S)LQ3 type: 8A 250VAC at 70°C
	1 Form C	AgCdO, AgNi	3A 250VAC/30VDC at 70°C
	1 Form A	AgCdO, AgNi	H type: 5A 250VAC /30VDC at 70°C HL type: 3A 250VAC /30VDC at 70°C
		AgNi	H(S)LQ3 type: 8A 250VAC at 85°C
VDE	1 Form C	AgCdO, AgNi	3A 250VAC/30VDC at 70°C

Notes: Only some typical ratings are listed above. If more details are required, please contact us.


ORDERING INFORMATION

Type	HF32F / 012 -H S L Q 3 (XXX)
Coil voltage	3, 5, 6, 9, 12, 18, 24, 48VDC
Contact arrangement	H: 1 Form A Z: 1 Form C
Construction ¹⁾	S: Plastic sealed Nil: Flux proofed
Coil Power	L: Sensitive (Only for 1 Form A) Nil: Standard
Contact Capacity	Q: High Capacity (Only for Sensitive) Nil: Standard
Contact material	3: AgNi Nil: AgCdO
Customer special code	e.g. (335) stands for product in accordance to IEC 60335-1 (GWT)


Notes: 1) Under the ambience with dangerous gas like H₂S, SO₂ or NO₂, plastic sealed type is recommended; Please test the relay in real applications. If the ambience allows, flux proofed type is preferentially recommended.
If water cleaning is required after the relay is assembled on PCB, please contact us for suggestion about suitable parts.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

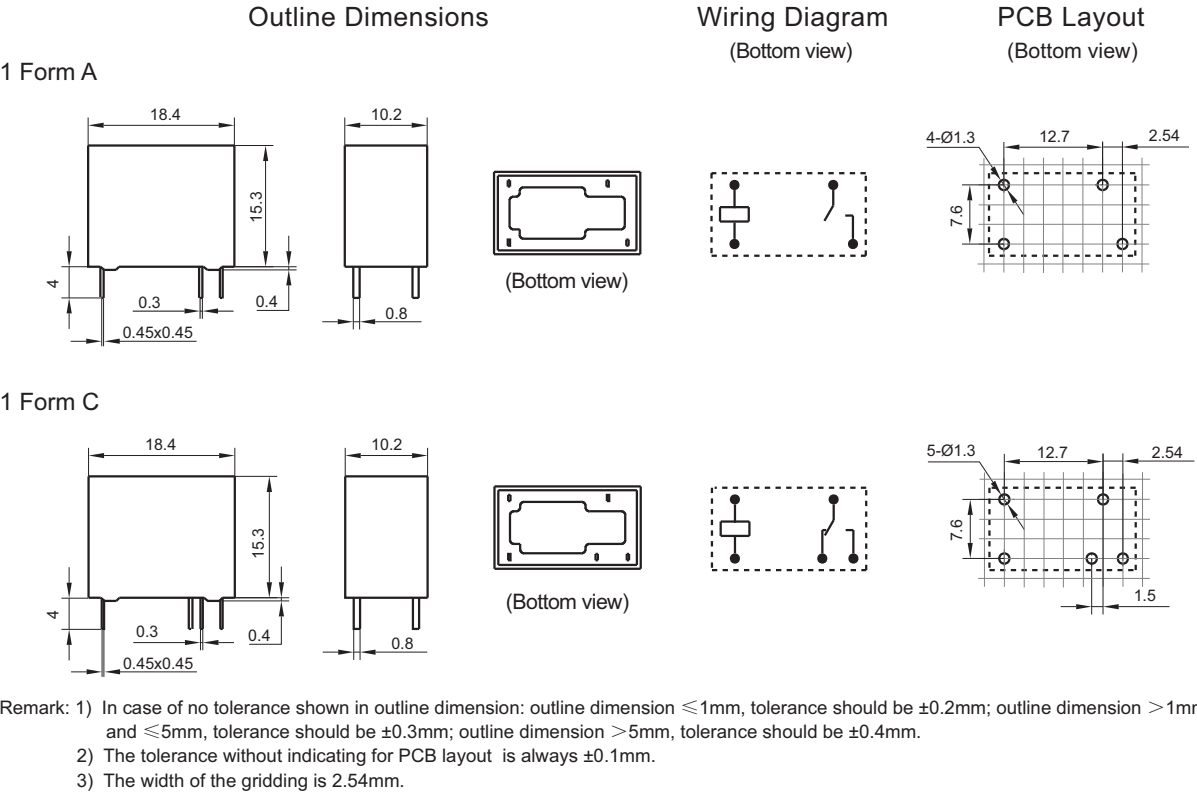

CHARACTERISTIC CURVES

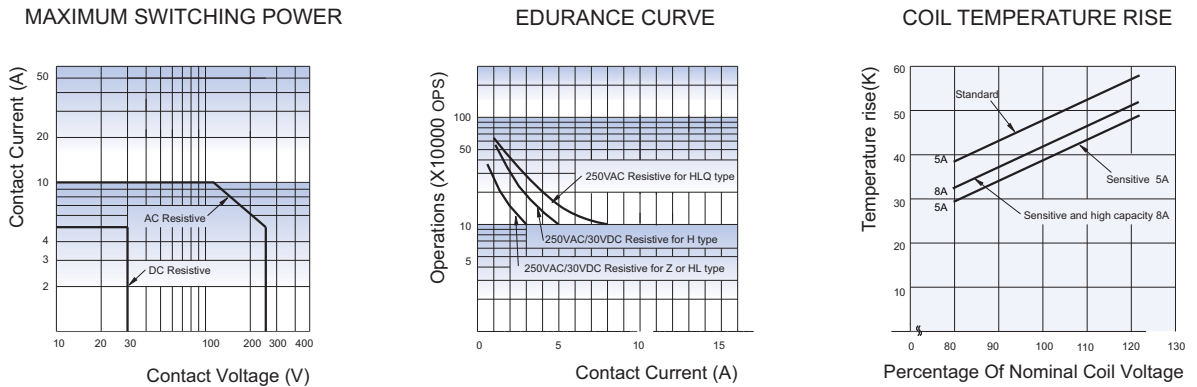

Disclaimer
This datasheet is for the customers' reference. All the specifications are subject to change without notice.
We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.