

HF9317

HALF-SIZE CRYSTAL CAN HERMETICALLY SEALED RELAY
WITH 2 FORM C 10A LOAD



- Features
- Load can be 10A 28Vd.c.
 - High ambient applicability
 - 2 Form C
 - All metal welded construction
 - Hermetically welded and marked by laser

AMBIENT ADAPTABILITY

Ambient grade		I	II	III
Ambient temperature		-55 °C to 85 °C	-55 °C to 85 °C	-65 °C to 125 °C
Humidity		98 %, 40 °C		
Low air pressure		58.53 kPa	4.39 kPa	4.39 kPa
Sine vibration	Frequency	10 Hz to 1000 Hz	10 Hz to 2000 Hz	10 Hz to 3000 Hz
	Acceleration	147 m/s ²	196 m/s ²	294 m/s ²
Shock resistance		490 m/s ²	735 m/s ²	980 m/s ²
Random vibration			20 (m/s ²)/Hz	40 (m/s ²)/Hz
Steady-state acceleration				490 m/s ²

CONTACT DATA

Ambient grade		I	II	III
Arrangement		2 C		
Contact resistance	Initial max.	50 mΩ		
	After life max.	250 mΩ		

Contact ratings

Ambient grade	Contact load	Type	Electrical life min.
I	10 A 28 Vd.c.	Resistive	2 x 10 ⁴ ops
II	10 A 28 Vd.c.	Resistive	2 x 10 ⁴ ops
III	10 A 28 Vd.c.	Resistive	3 x 10 ⁴ ops
	5 A 28 Vd.c.	Resistive	1 x 10 ⁵ ops

SPECIFICATION				
Ambient grade		I	II	III
Insulation resistance min.		1000 MΩ (@ 500 Vd.c.)	10000 MΩ (@ 500 Vd.c.)	10000 MΩ (@ 500 Vd.c.)
Dielectric strength min. (Normal condition)	Between open contacts	500 Vr.m.s.	500 Vr.m.s.	500 Vr.m.s.
	Between contact & coil	750 Vr.m.s.	1000 Vr.m.s.	1000 Vr.m.s.
	Between contact & cover	750 Vr.m.s.	1000 Vr.m.s.	1000 Vr.m.s.
	Between contact group	750 Vr.m.s.	1000 Vr.m.s.	1000 Vr.m.s.
	Between coil & cover	500 Vr.m.s.	500 Vr.m.s.	500 Vr.m.s.
Dielectric strength min. (Low air pressure condition)		300 Vr.m.s.	350 Vr.m.s.	350 Vr.m.s.
Leakage rate max.		1 Pa•cm ³ /s	1 x 10 ⁻¹ Pa•cm ³ /s	1 x 10 ⁻³ Pa•cm ³ /s
Operate time max.		6 ms		
Release time max.		4 ms		
Mounting style		See the mounting dimension		
Terminals		See the terminal styles		
Work position		Random		
Weight max.		13 g		

COIL DATA	
Norminal coil power	Approx. 1.2W

Coil Version										Vd.c.
Order Number	Coil voltage		at 25 °C				-65°C to 125°C			
	Nominal voltage	Value max.	Coil resistance (1±10%) Ω	Pick-up voltage max.	Hold voltage max.	Drop-out voltage min.	Pick-up voltage max.	Hold voltage max.	Drop-out voltage min.	
005	5	6.0	21	3.25	1.65	0.29	4.6	2.4	0.21	
006	6	7.5	30	3.90	2.00	0.35	5.5	2.9	0.25	
009	9	11.8	68	5.85	3.00	0.52	8.3	4.3	0.38	
012	12	15.0	125	7.80	4.00	0.70	11.0	5.8	0.50	
024	24	28.8	480	15.60	7.50	1.20	22.0	11.6	0.90	
027	27	32.0	600	17.60	8.00	1.50	24.8	14.0	1.00	


Notes: We can offer many kinds of coil voltage under the requirement of users.

ORDERING INFORMATION					
Type	HF9317	-012	-0	1	- I
Order Number	005、006、009、012、018、027				
Mounting Style	0, 1, 2, 3 (See the mounting dimension)				
Terminals Style	1, 4 (See " Terminal styles " below)				
Ambient Grade	I 、 II 、 III				

OUTLINE DIMENSIONS AND WIRING DIAGRAM


Unit:mm

Outline Dimension

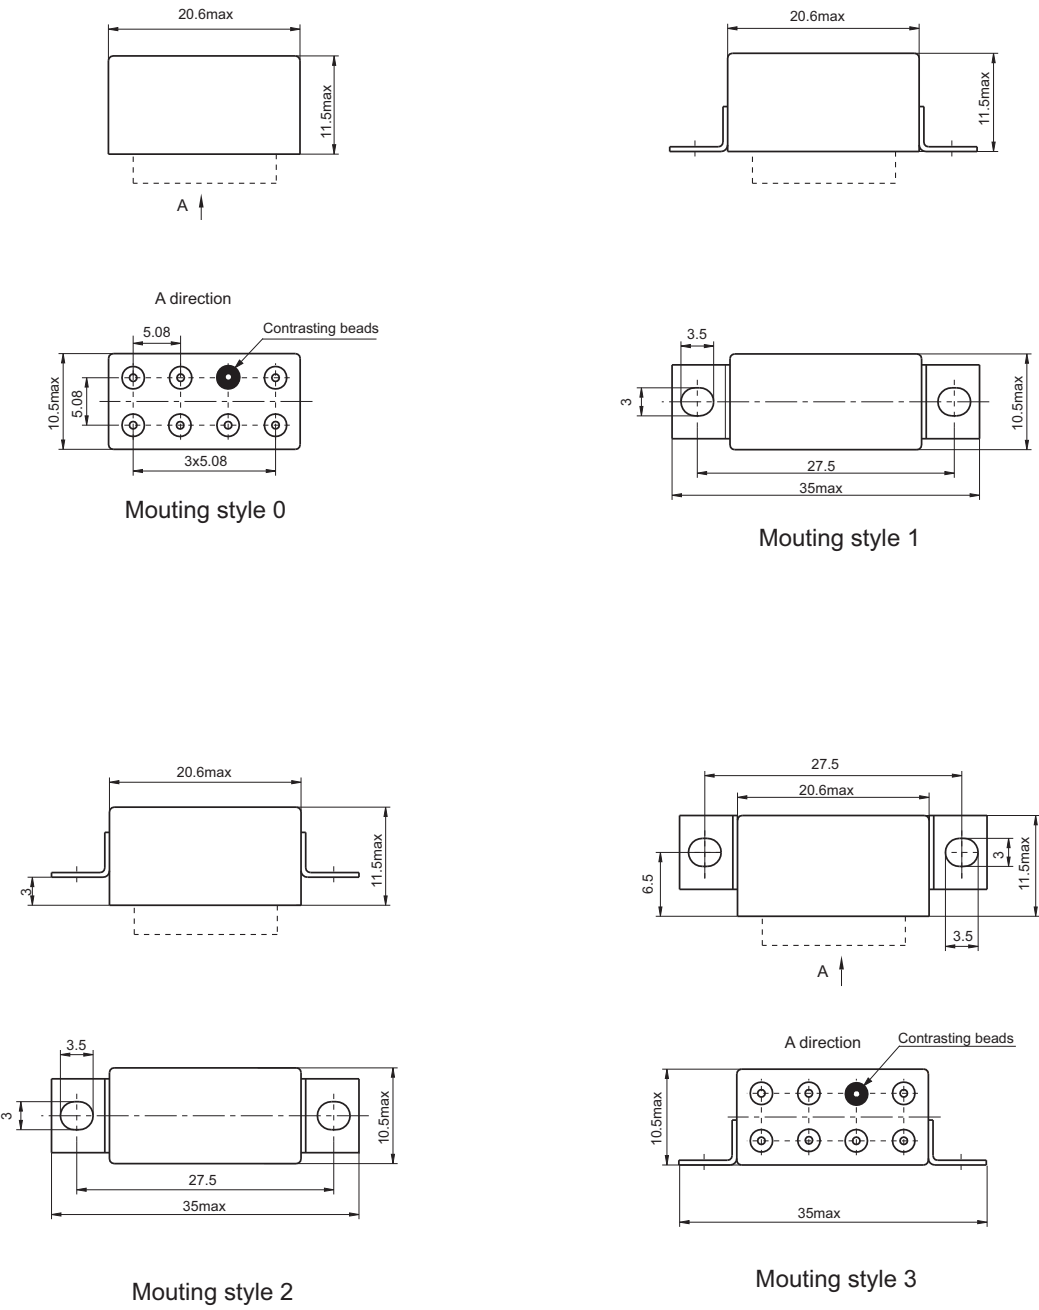


OUTLINE DIMENSIONS AND WIRING DIAGRAM


Unit:mm




Coil Terminal Style 1
(Solder pin)




Coil Terminal Style 4
(Solder hook)



Wiring Diagram
(Bottom View)



Contact Terminal Style 1
(Solder pin)



Contact Terminal Style 4
(Solder hook)

Disclaimer
This datasheet is for the customers' reference. All the specifications are subject to change without notice.
© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.