

HF9618

1/5 CUBIC INCH 2 FORM C HERMETICALLY SEALED
LATCHING RELAY WITH COIL TRANSIENT SUPPRESSION



- Features
- Latching relay
 - With coil transient suppression
 - 5A contacts switching capability
 - Failure rate level can be level L
 - High ambient applicability
 - All metal welded construction
 - Hermetically welded and marked by laser

AMBIENT ADAPTABILITY

Ambient grade		I	II	III
Ambient temperature		-55 °C to 85 °C	-55 °C to 85 °C	-65 °C to 125 °C
Humidity		98%, 40 °C		
Low air pressure		58.53 kPa	4.4 kPa	4.4 kPa
Sine vibration	Frequency	10 Hz to 1000 Hz	10 Hz to 2000 Hz	10 Hz to 3000 Hz
	Acceleration	147 m/s ²	196 m/s ²	294 m/s ²
Shock resistance		490 m/s ²	980 m/s ²	1960 m/s ²
Random vibration		10 (m/s ²) ² /Hz	20 (m/s ²) ² /Hz	40 (m/s ²) ² /Hz
Steady-state acceleration		147 m/s ²	294 m/s ²	490 m/s ²

CONTACT DATA

Ambient grade		I	II	III
Arrangement		2 C		
Contact resistance	Initial max.	0.05Ω		
or voltage drop	After life max.	0.125V		
Failure level		Level L		

Contact ratings

Type	Contact load		Electrical life min.
	28Vd.c.	115Va.c. 400Hz Single phase	
Resistive	5A	5A	1 x 10 ⁵ OPS
Inductive	3A	5A	2 x 10 ⁴ OPS
Motor	2A		1 x 10 ⁵ OPS
Lamp load	1A		1 x 10 ⁵ OPS

SPECIFICATION

Ambient grade		I	II	III
Insulation	Initial	100 MΩ (@ 500 Vd.c.)	100 MΩ (@ 500 Vd.c.)	100 MΩ (@ 500 Vd.c.)
resistance min.	After life or after testing	50 MΩ (@ 500 Vd.c.)	50 MΩ (@ 500 Vd.c.)	50 MΩ (@ 500 Vd.c.)
Dielectric strength min. (Normal condition)	Between coil & cover(initial)	500 Vr.m.s.	500 Vr.m.s.	500 Vr.m.s.
	Between coil & cover(after life testing)	350 Vr.m.s.	350 Vr.m.s.	350 Vr.m.s.
	Between other insulation parts(initial)	750 Vr.m.s.	750 Vr.m.s.	1000 Vr.m.s.
	Between other insulation parts(after life testing)	500 Vr.m.s.	500 Vr.m.s.	750 Vr.m.s.
Dielectric strength min.(Low air pressure condition)		250 Vr.m.s.	250 Vr.m.s.	250 Vr.m.s.
Leakage rate max.		1 Pa•cm ³ /s	1 x 10 ⁻¹ Pa•cm ³ /s	1 x 10 ⁻³ Pa•cm ³ /s
Operate time max.		6 ms		
Release time max.		20 ms		
Mounting style		See the mounting dimension		
Terminals		See the terminal styles		
Work position		Random		
Weight max.		20 g		

COIL DATA

Norminal coil power	Approx. 1.2W
---------------------	--------------

Coil Version

Order Number	Coil voltage		at 25 °C		-65°C to 125°C	Pick-up voltage max.	
	Nominal voltage	Value max.	Coil resistance (Ω) min.	Pick-up voltage max.	Pick-up voltage max.	High temp. test	Continuous electric test
006	6	7.3	38	3.2	4.5	5.0	5.7
012	12	14.5	160	6.5	9.0	9.9	11.25
028	28	29.0	650	15.5	20.0	21.0	25.0

Notes: We can offer many kinds of coil voltage under the requirement of users.


ORDERING INFORMATION

Type	HF9618	-012	L	-0	1	- II
Order Number	006、012、028					
Failure Rate	L (level III products available)					
Mounting Style	0, 2, 3 (See the mounting dimension)					
Terminals Style	1, 4 (See " Terminal styles " below)					
Ambient Grade	I : level I II : level II Nil: level III(With failure rate requirement)					

OUTLINE DIMENSIONS AND WIRING DIAGRAM

Unit:mm

Outline Dimension

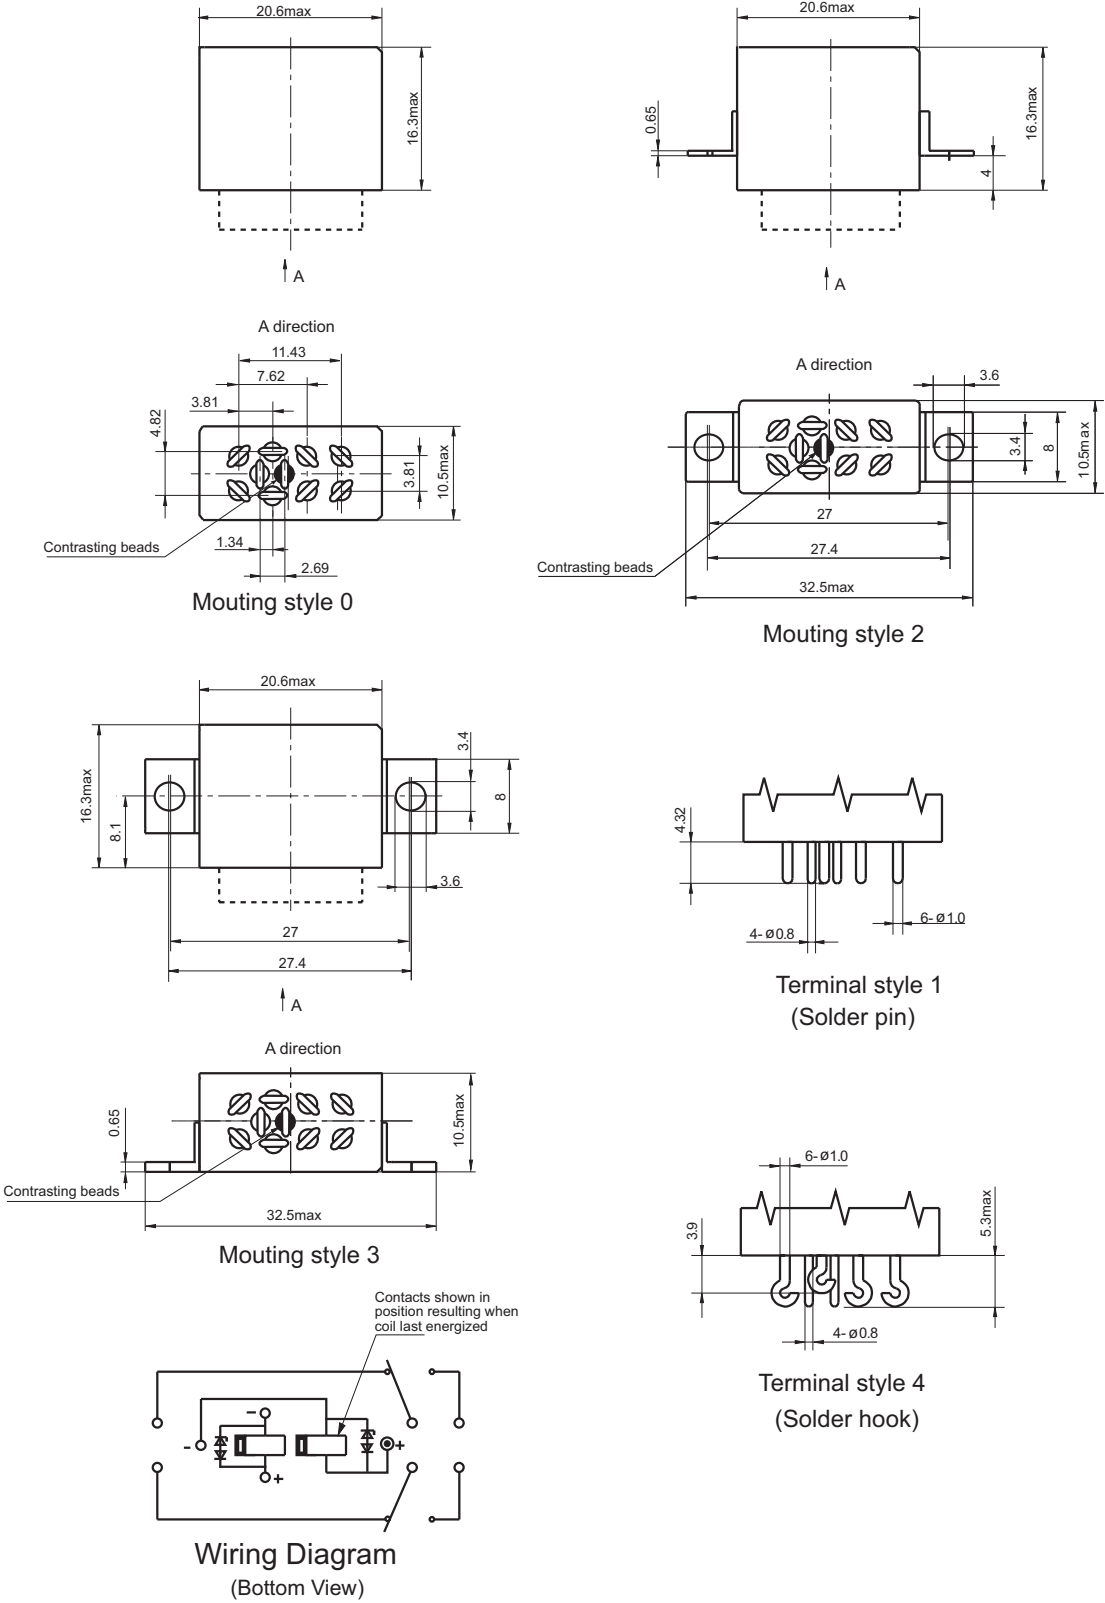

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.