


Flight II 120 DC



MECHANICAL DRAWING

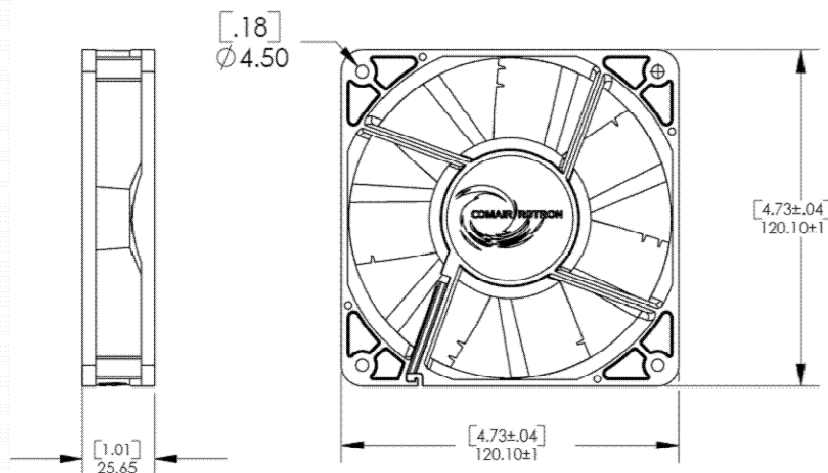


STANDARD FEATURES

- Size: 120.1 x 25.65mm deep (4.73" x 1.01")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 200 g (7.0 oz)
- Dual Ball Bearings
- Impeller: Plastic
- Venturi: Plastic
- 12" Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

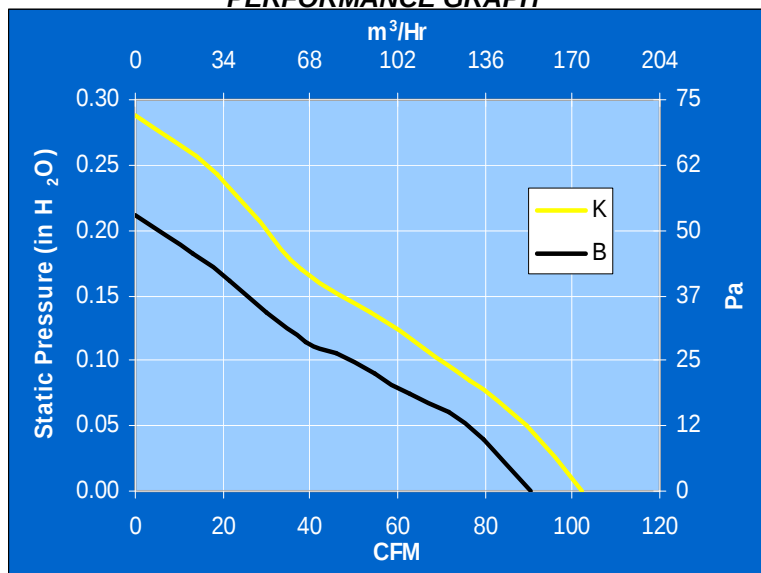

120 x 26 mm


Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m³/Hr	in H ₂ O	Pa	dBA
FT12B	12	6 - 14	0.35	4.1	2924	90	153	0.21	52.3	42.9
FT24B	24	12 - 28	0.17	4.0	2924	90	153	0.21	52.3	42.9
FT48B	48	24 - 56	0.10	4.8	2924	90	153	0.21	52.3	42.9
FT12K	12	6 - 14	0.50	6.0	3500	103	175	0.29	72.2	47.6
FT24K	24	12 - 28	0.26	6.3	3500	103	175	0.29	72.2	47.6
FT48K	48	24 - 56	0.13	6.4	3500	103	175	0.29	72.2	47.6

Предлагаем продукцию COMAIR
ROTRON
и другие (радиодетали) Беларусь
г. Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Muffin DC

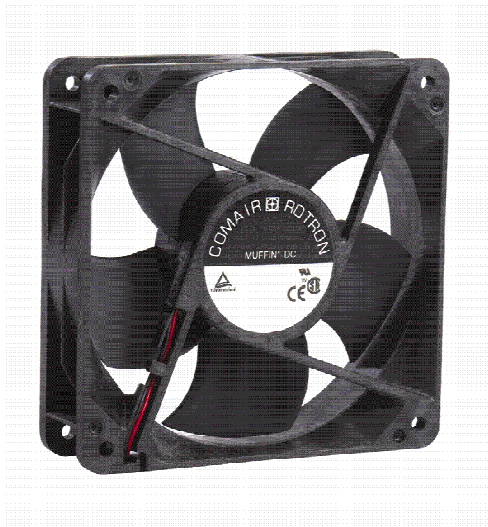

MECHANICAL DRAWING

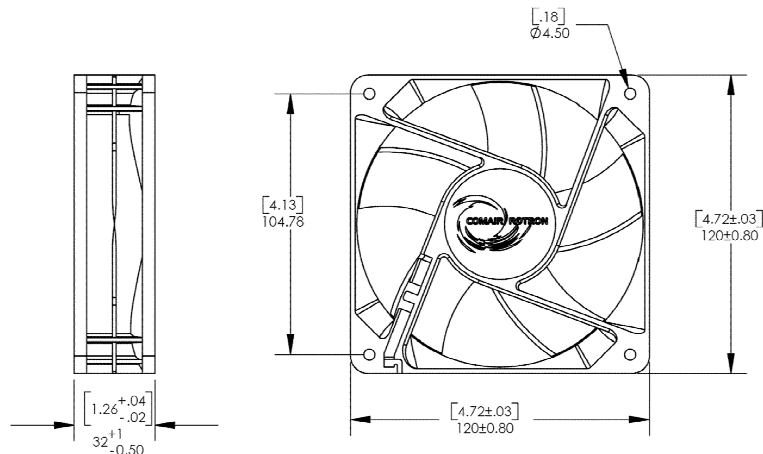


STANDARD FEATURES

- Size: 120 x 32mm deep (4.72" x 1.26")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 240g (8.5 oz.)
- Dual Ball Bearings
- Impeller: Polypropylene
- Venturi: Plastic
- 12" Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

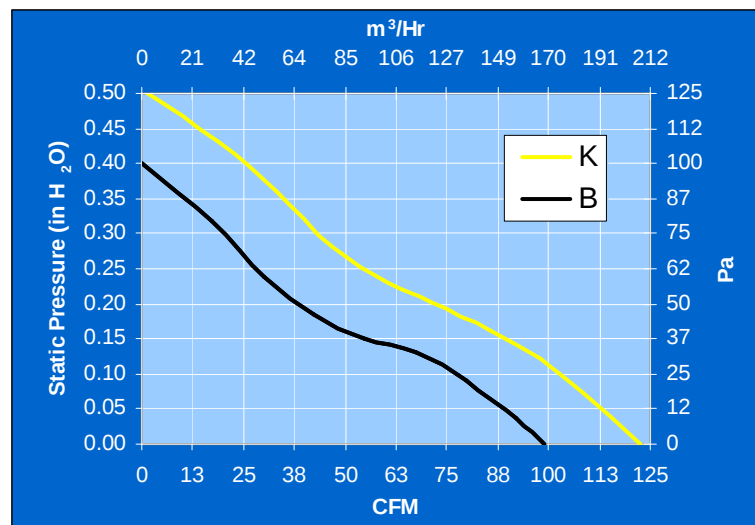

120 x 32 mm

Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m³/Hr	in H ₂ O	Pa	dBA
MC12B	12	6 - 14	0.66	7.9	3700	102	173	0.35	87	47.8
MC24B	24	12 - 28	0.23	5.5	3700	102	173	0.35	87	47.8
MC48B	48	24 - 56	0.18	8.4	3700	102	173	0.35	87	47.8
MC12K	12	6 - 14	1.00	12.0	4500	118	199	0.51	127	n/a
MC24K	24	12 - 28	0.44	10.6	4500	118	199	0.51	127	n/a
MC48K	48	24 - 56	0.22	10.6	4500	118	199	0.51	127	n/a

Предлагаем продукцию COMAIR
ROTRON
и другие (радиодетали) Беларусь
г. Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Muffin XP DC



MECHANICAL DRAWING

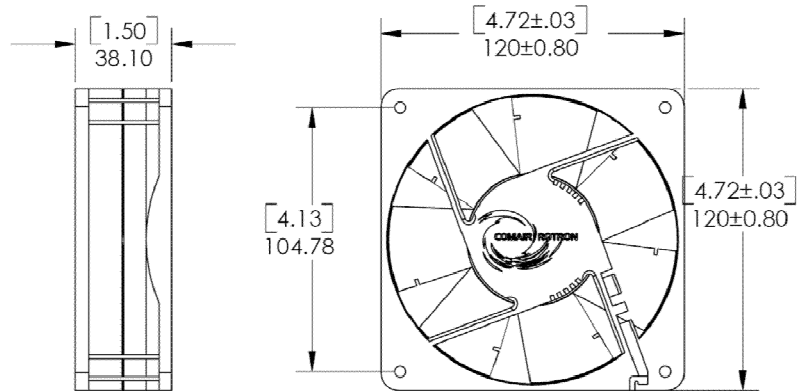

120 x 38mm


STANDARD FEATURES

- Size: 120 x 38.1mm deep (4.72" x 1.50")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 250g (8.8 oz)
- Dual Ball Bearings
- Impeller: Plastic
- Venturi: Plastic
- 12" Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

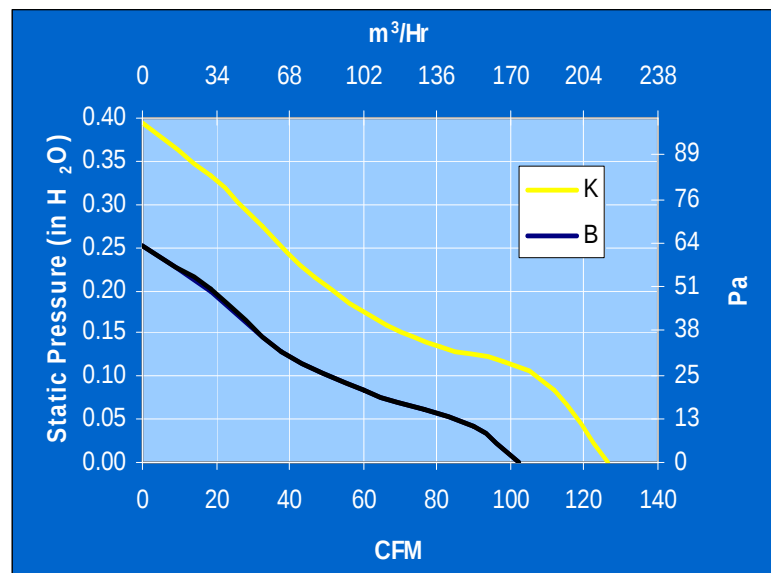


Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m³/Hr	in H ₂ O	Pa	dBA
MS12B	12	6 - 14	0.58	7.0	2900	110	187	0.25	62	49.5
MS24B	24	12 - 28	0.29	7.0	2900	110	187	0.25	62	49.5
MS48B	48	24 - 56	0.15	7.4	2900	110	187	0.25	62	49.5
MS12K	12	6 - 14	0.92	11.0	3450	127	216	0.40	100	53.4

Предлагаем продукцию COMAIR
ROTRON
и другие (радиодетали) Беларусь
г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Muffin XL DC

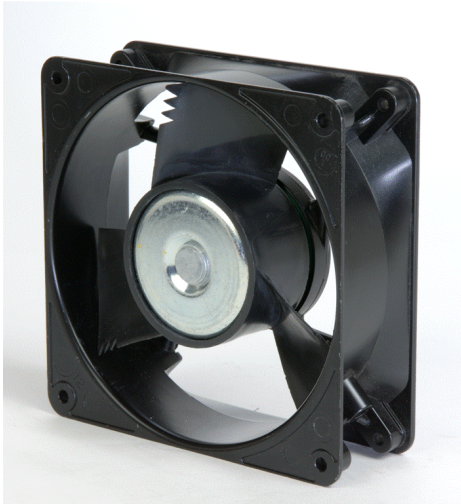

MECHANICAL DRAWING

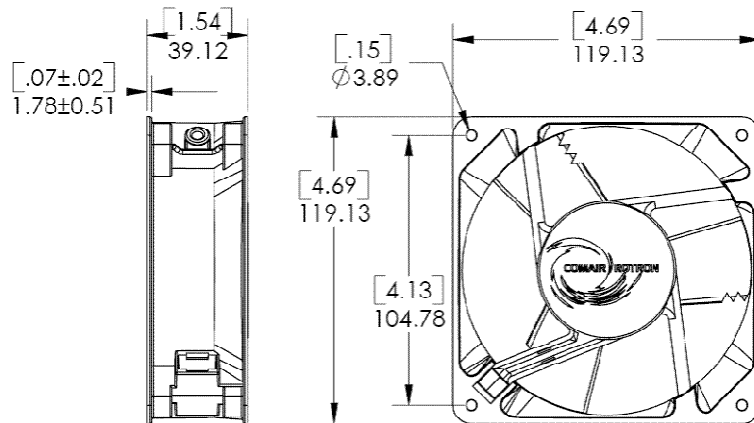


STANDARD FEATURES

- Size: 119.13mm x 39.12mm deep (4.69" x 1.54")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 610g (1 lbs. 5.5 oz.)
- Dual Ball Bearings
- Impeller: polypropylene
- Venturi: Metal Alloy
- 12" Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

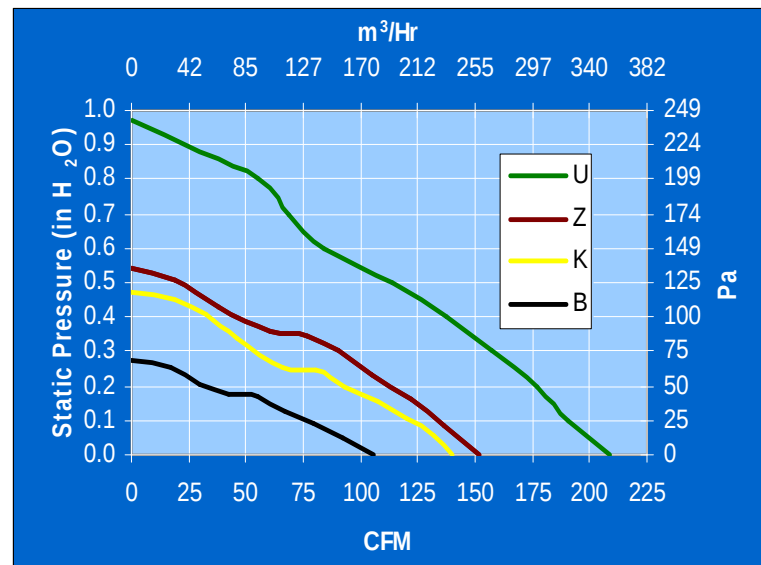

120 x 39 mm


Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m³/Hr	in H ₂ O	Pa	dBA
MD12B	12	6 - 14	0.50	6.0	3330	110	187	0.28	69	50.0
MD24B	24	12 - 28	0.25	6.0	3330	110	187	0.28	69	50.0
MD28B	28	12 - 32	0.23	6.5	3330	110	187	0.28	69	50.0
MD48B	48	24 - 56	0.12	5.8	3330	110	187	0.28	69	50.0
MD60B	60	30 - 72	0.10	6.0	3330	110	187	0.28	69	50.0
MD24K	24	12 - 28	0.55	13.2	4100	140	238	0.47	117	55.5
MD24Z	24	12 - 28	0.60	14.4	4350	150	255	0.54	135	55.7
MDD24U	24	12 - 28	1.60	38.0	6300	210	355	0.97	242	65.0
MDD48U	48	24 - 56	0.80	38.0	6300	210	355	0.97	242	65.0

Предлагаем продукцию COMAIR
ROTRON
и другие (радиодетали) Беларусь
г. Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Galaxy DC

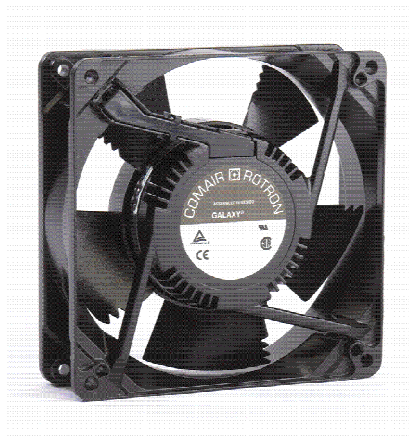

MECHANICAL DRAWING

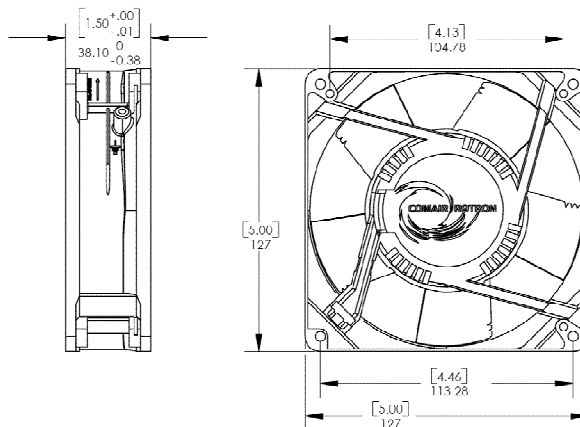


STANDARD FEATURES

- Size: 127 x 38.1mm deep (5.0" x 1.5")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 620g (1.4 lbs)
- Dual Ball Bearings
- Impeller: Polycarbonate
- Venturi: Metal Alloy
- 12" Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

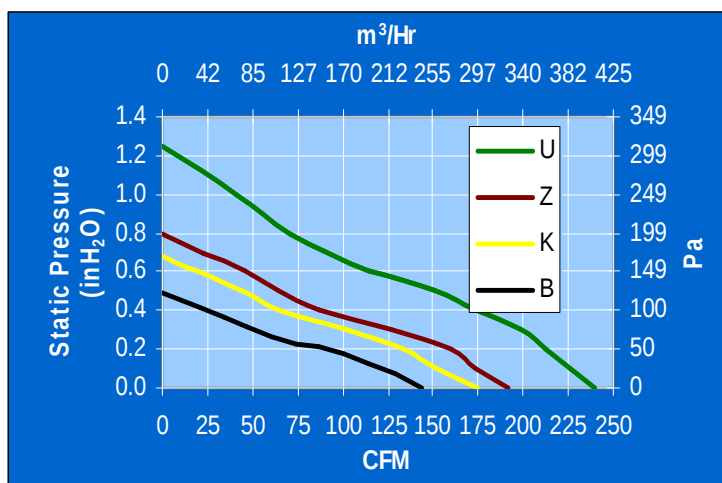

127 x 38 mm

Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m ³ /Hr	in H ₂ O	Pa	
GL12B	12	6 - 14	1.25	15.0	3200	150	255	0.49	122	53.6
GL24B	24	12 - 28	0.63	15.0	3200	150	255	0.49	122	53.6
GL48B	48	24 - 56	0.31	15.0	3200	150	255	0.49	122	53.6
GL12K	12	6 - 14	1.92	22.0	3900	175	297	0.68	169	57.2
GL24K	24	12 - 28	0.95	22.8	3900	175	297	0.68	169	57.2
GL48K	48	24 - 56	0.47	21.6	3900	175	297	0.68	169	57.2
GL12Z	12	6 - 14	2.50	30.0	4150	195	331	0.79	197	59.8
GL24Z	24	12 - 28	1.30	31.2	4150	195	331	0.79	197	59.8
GL48Z	48	24 - 56	0.60	28.8	4150	195	331	0.79	197	59.8
GLD24U	24	16 - 28	1.43	34.0	5170	240	407	1.25	311	65.0
GLD48U	48	40 - 52	0.72	34.0	5170	240	407	1.25	311	65.0

Предлагаем продукцию COMAIR
 ROTRON
 и другие (радиодетали) Беларусь
 г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending


Major XT DC



MECHANICAL DRAWING

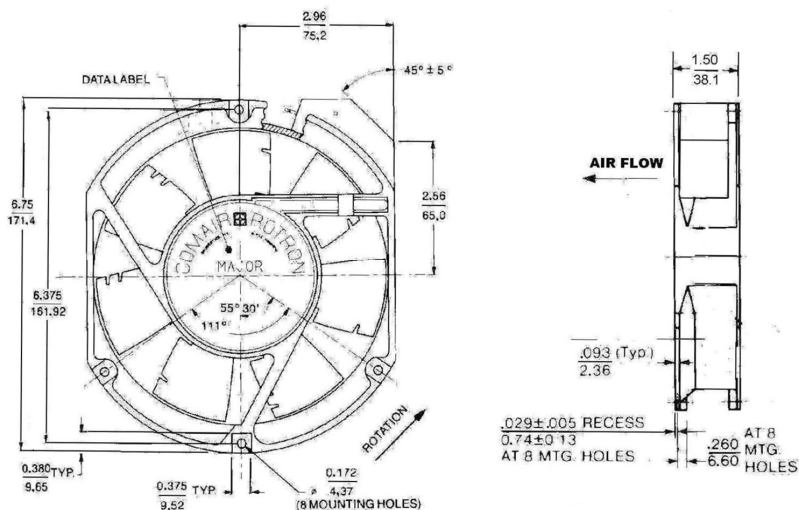

PERFORMANCE GRAPH

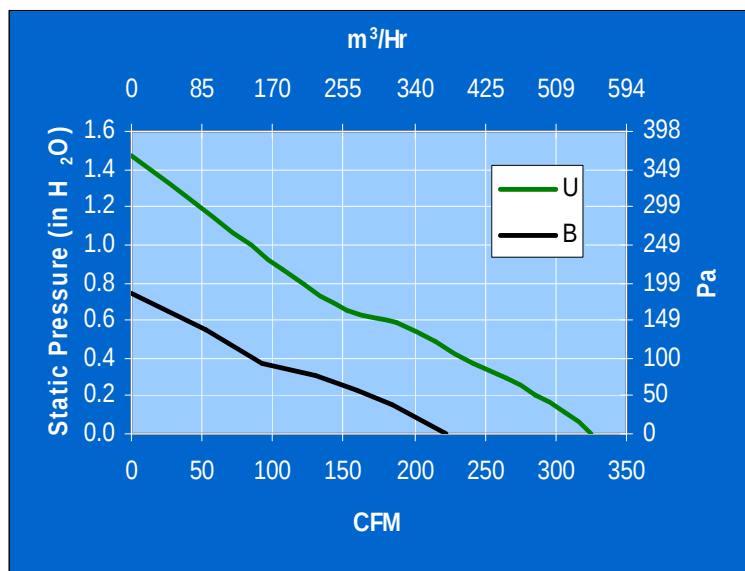

STANDARD FEATURES

- Size: 171.4mm x 150.4mm x 38.1mm deep (6.75" x 5.92" x 1.5")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 700g (1.54 lbs.)
- Dual Ball Bearings
- Impeller: Polycarbonate
- Venturi: Die Cast Aluminum
- 12" Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

172 x 150 x 38 mm

Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m ³ /Hr	in H ₂ O	Pa	dBA
MJ12B	12	6 - 14	2.20	25.0	3450	225	382	0.75	187	59.6
MJ24B	24	12 - 28	0.90	22.0	3450	225	382	0.75	187	59.6
MJ48B	48	24 - 56	0.45	22.0	3450	225	382	0.75	187	59.6
MJD24U	24	16 - 32	1.65	40.0	4846	325	552	1.47	366	63.1
MJD48U	48	28 - 72	0.83	40.0	4846	325	552	1.47	366	63.1

Предлагаем продукцию COMAIR
ROTRON
и другие (радиодетали) Беларусь
г. Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Major DC



MECHANICAL DRAWING

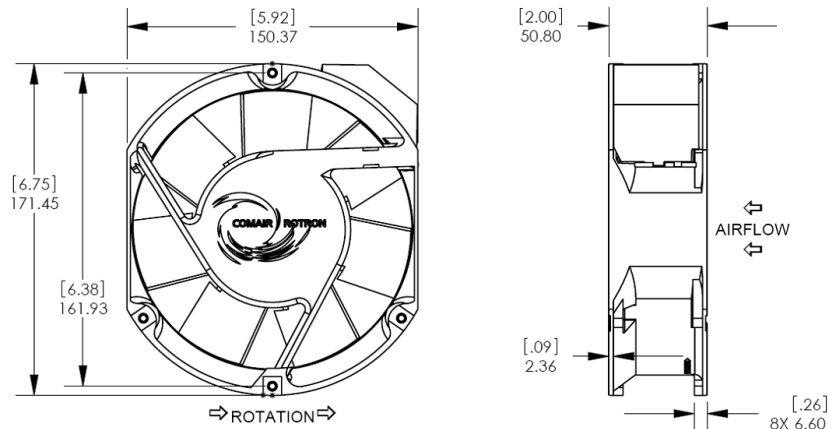

172 x 150 x 51 mm


STANDARD FEATURES

- Size: 171.5 x 150.4 x 50.8mm deep (6.75" x 5.92" x 2.00")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 815g(1.79 lbs)
- Dual Ball Bearings
- Impeller: Polycarbonate
- Venturi: Die Cast Aluminum
- 12" Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

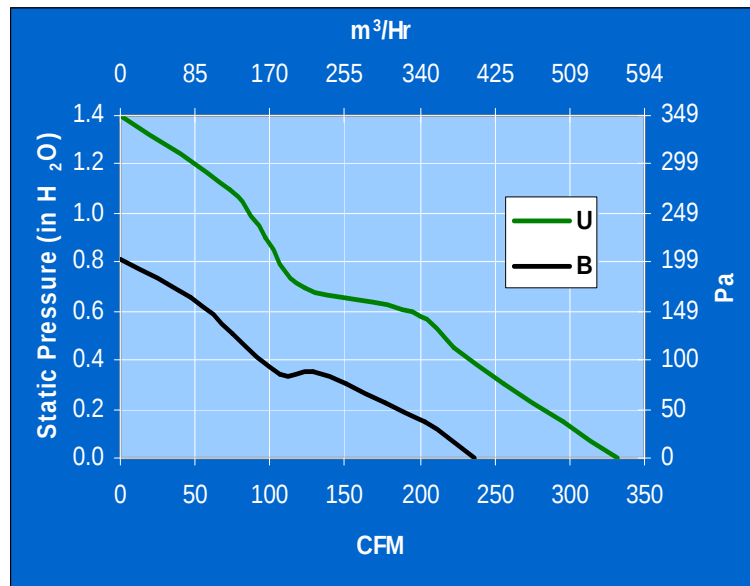


Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m ³ /Hr	in H ₂ O	Pa	dBA
JQ12B	12	6 - 14	2.26	27.1	3400	235	399	0.81	202	54.3
JQ24B	24	12 - 28	1.00	24.0	3400	235	399	0.81	202	54.3
JQ48B	48	24 - 56	0.46	22.0	3400	235	399	0.81	202	54.3
JQD24U	24	16 - 32	1.70	41.0	4830	335	564	1.40	349	64.0
JQD48U	48	28 - 72	0.85	41.0	4830	335	564	1.40	349	64.0

Предлагаем продукцию COMAIR
ROTRON
и другие (радиодетали) Беларусь
г. Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Patriot DC

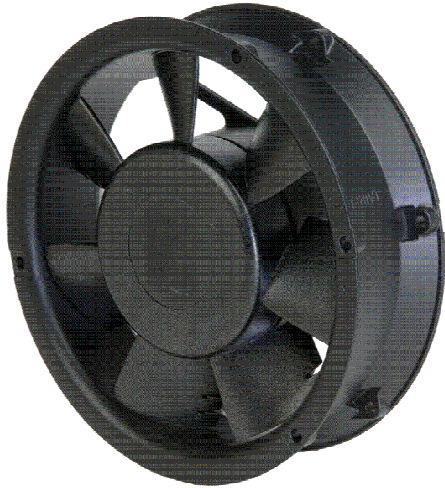

MECHANICAL DRAWING

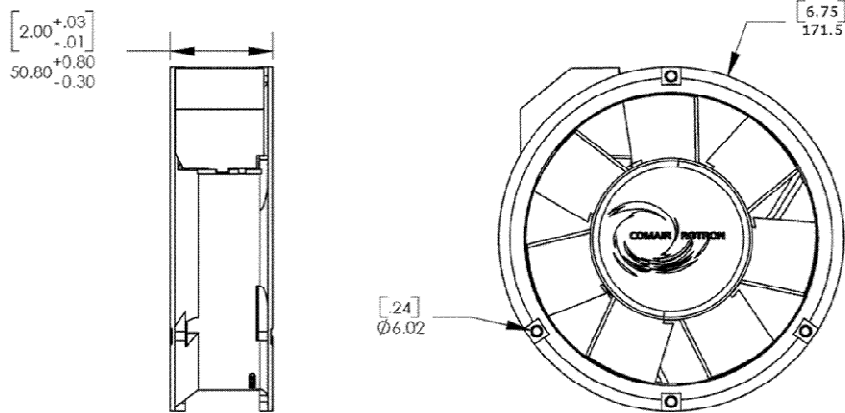


STANDARD FEATURES

- Size: 171.5 x 50.8mm deep (6.75" x 2.00")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 825 (1.82 lbs)
- Dual Ball Bearings
- Impeller: Polycarbonate
- Venturi: Die Cast Aluminum
- 12" Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

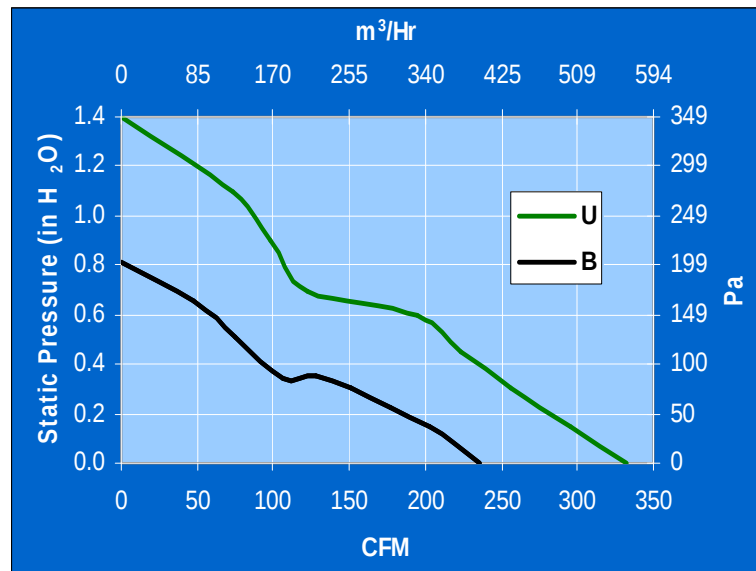

172 x 51 mm


Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m³/Hr	in H ₂ O	Pa	dBA
PQ12B	12	6 - 14	2.26	27.1	3400	235	399	0.81	202	54.3
PQ24B	24	12 - 28	1.00	24.0	3400	235	399	0.81	202	54.3
PQ48B	48	24 - 56	0.46	22.0	3400	235	399	0.81	202	54.3
PQD24U	24	16 - 32	1.70	41.0	4830	335	564	1.40	349	64.0
PQD48U	48	28 - 72	0.85	41.0	4830	335	564	1.40	349	64.0

Предлагаем продукцию COMAIR
ROTRON
и другие (радиодетали) Беларусь
г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Maltese DC

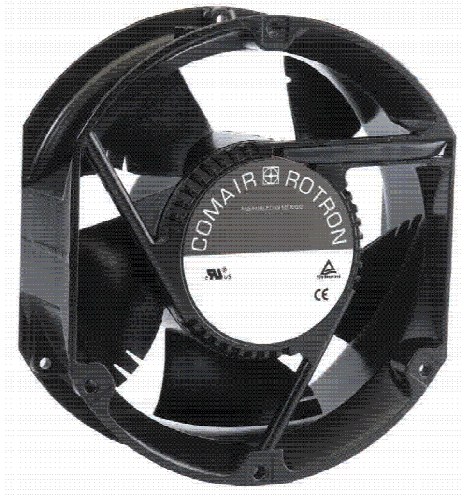

MECHANICAL DRAWING

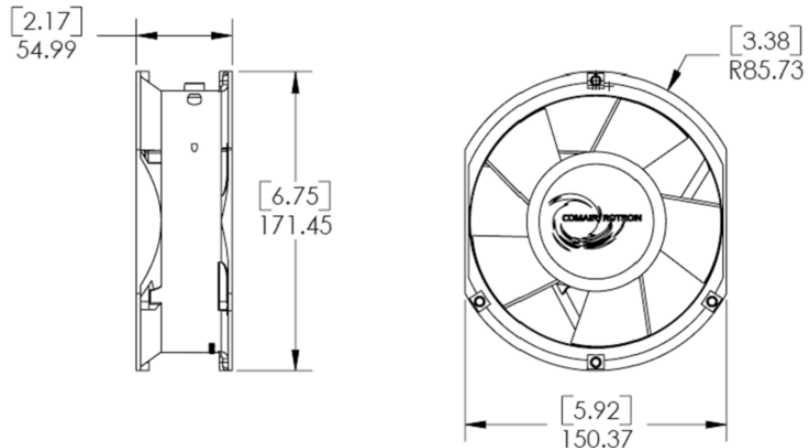

172 x 150 x 55 mm


STANDARD FEATURES

- Size: 171.45 x 150.37 x 54.99mm deep (6.75" x 5.92" x 2.17")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 860 g (1.89 lbs)
- Dual Ball Bearings
- Impeller: Polycarbonate
- Venturi: Die Cast Aluminum
- 12" Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

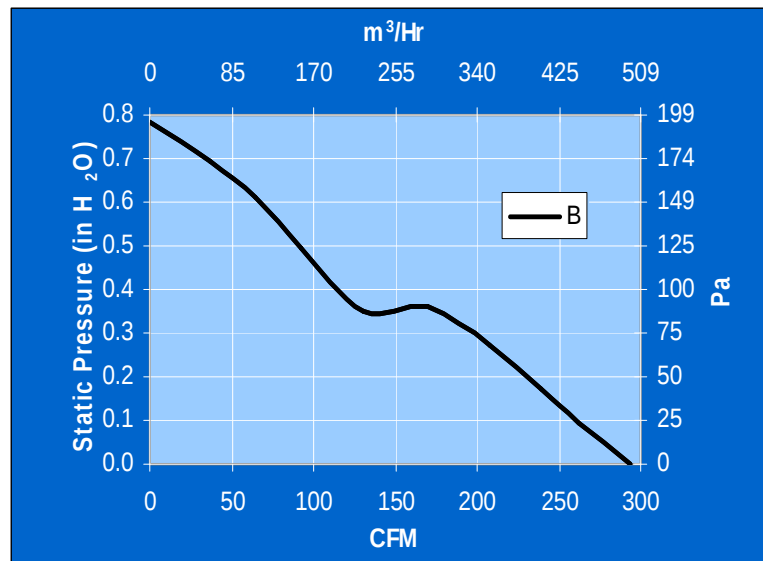

Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m³/Hr	in H₂O	Pa	dBA
MT12B	12	16 - 24	3.0	36.0	3400	300	509	0.8	199	57.1
MT24B	24	12 - 28	1.5	35.5	3400	300	509	0.8	199	57.1
MT48B	48	24 - 56	0.7	34.5	3400	300	509	0.8	199	57.1

Предлагаем продукцию COMAIR
ROTRON
и другие (радиодетали) Беларусь
г. Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Falcon DC



MECHANICAL DRAWING

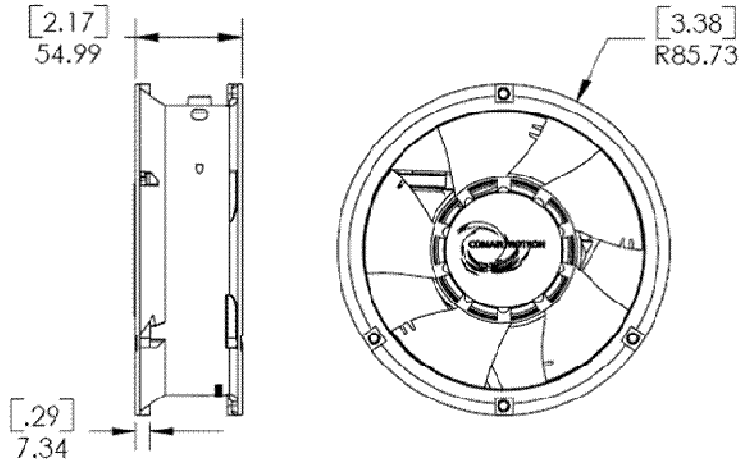


STANDARD FEATURES

- Size: 171.46 x 54.99mm deep (6.76" x 2.17")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 870 g (1.92 lbs)
- Dual Ball Bearings
- Impeller: FR Polycarbonate
- Venturi: Die Cast Aluminum
- 12" Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

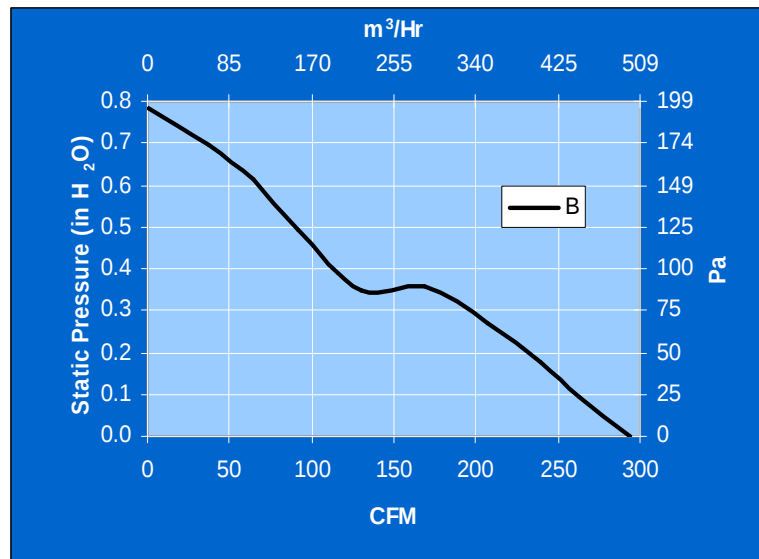

172 x 55 mm

Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow	Rated Air Pressure	Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m³/Hr	in H ₂ O
FD12B	12	16 - 24	3.0	36.0	3400	300	509	0.8
FD24B	24	12 - 28	1.5	35.5	3400	300	509	0.8
FD48B	48	24 - 56	0.7	34.5	3400	300	509	0.8
								Pa
								dBa

Предлагаем продукцию COMAIR
ROTRON
и другие (радиодетали) Беларусь
г. Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Tarzan DC



MECHANICAL DRAWING

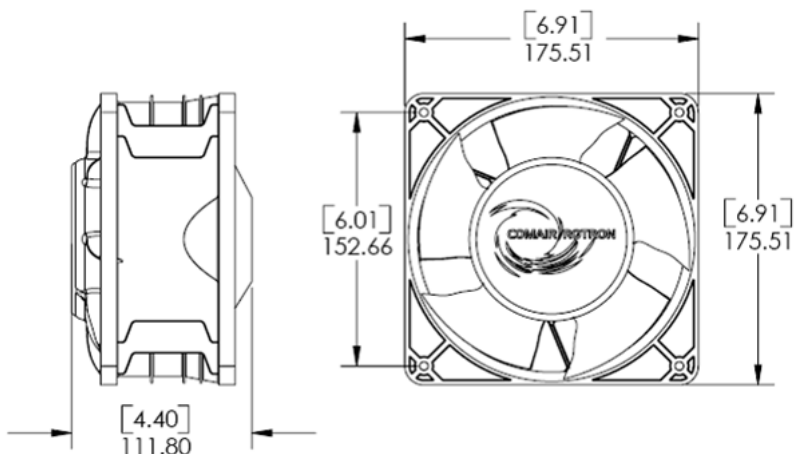


STANDARD FEATURES

- Size: 175.51 x 111.8mm deep (6.91" x 4.40")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 2.25Kg (5.0 lbs.)
- Dual Ball Bearings
- Impeller: Plastic
- Venturi: Polycarbonate
- 12" Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

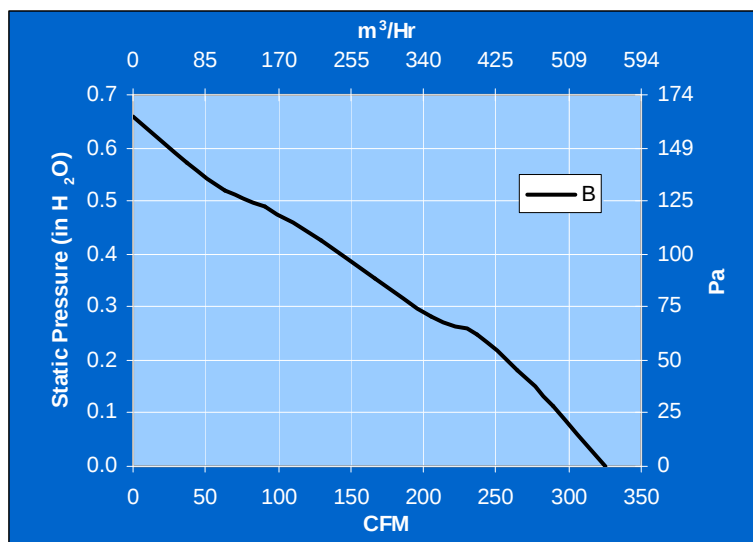

176 x 112mm

Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m³/Hr	in H ₂ O	Pa	dBA
TD12B	12	6 - 14	2.7	30	3315	330	560	0.66	167	n/a
TD24B	24	12 - 28	1.3	30	3315	330	560	0.66	167	n/a
TD48B	48	24 - 56	0.6	30	3315	330	560	0.66	167	n/a




approvals pending

Caravel DC



MECHANICAL DRAWING

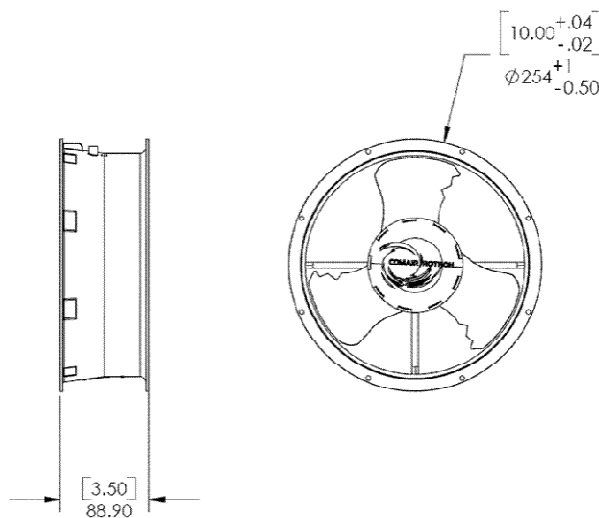


STANDARD FEATURES

- Size: 254 x 88.9mm deep (10" x 3.5")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 2 Kg (4.4 lbs)
- Dual Ball Bearings
- Impeller: FR Polycarbonate
- Venturi: Die Cast Aluminum
- 12" Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

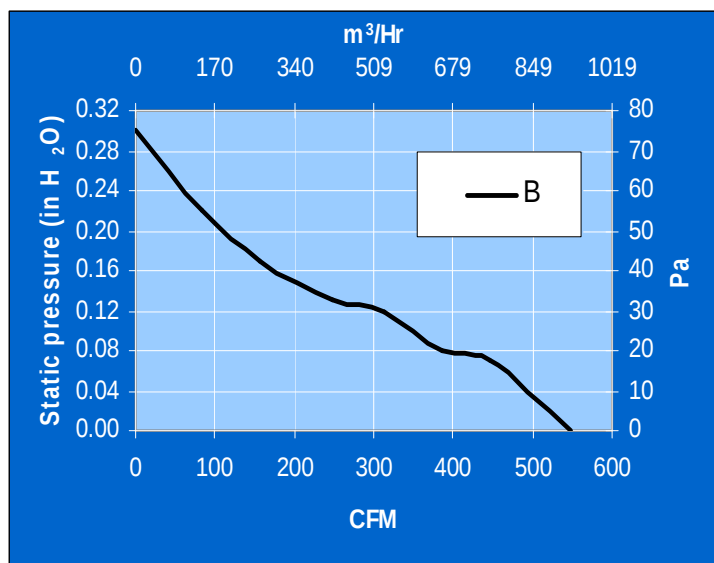

254 x 89 mm

Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m³/Hr	in H ₂ O	Pa	dBA
CD12B	12	16 - 24	2.8	34	1650	550	933	0.3	74.7	49.1
CD24B	24	12 - 28	1.2	29	1650	550	933	0.3	74.7	49.1
CD48B	48	24 - 56	0.6	30	1650	550	933	0.3	74.7	49.1

Предлагаем продукцию COMAIR
ROTRON
и другие (радиодетали) Беларусь
г. Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Mixtus 6.8



MECHANICAL DRAWING

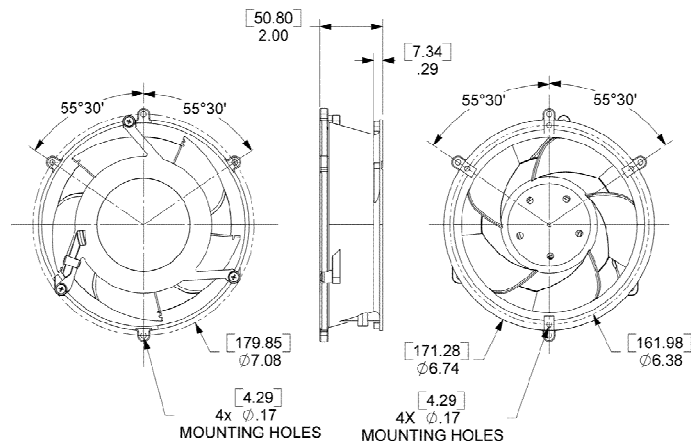


STANDARD FEATURES

- Size: 182mm x 50.8mm, 7.17" x 2.00"
- Acoustic: 69.1 dBA
- Nominal Operating Voltage: 36-72 VDC
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +80°C
- Permanently Lubricated Ball Bearings
- Termination: Lead Wires
- Two Piece, Die Cast Aluminum Venturi
- 12.0" 20 AWG, UL 1061 Style Leadwires
- Propeller: UL94V-0 PBT

BENEFITS

- High Pressure DC Cooling with multiple configurations to meet customers needs
- Outstanding Airflow
- True Dependability With an 18 Month Warranty
- Expected Life of 50,000 Hours @ 40°C
- High Performance Competitively Priced Fan
- Available Standard with Open Collector Tachometer & PWM

Performance Graph

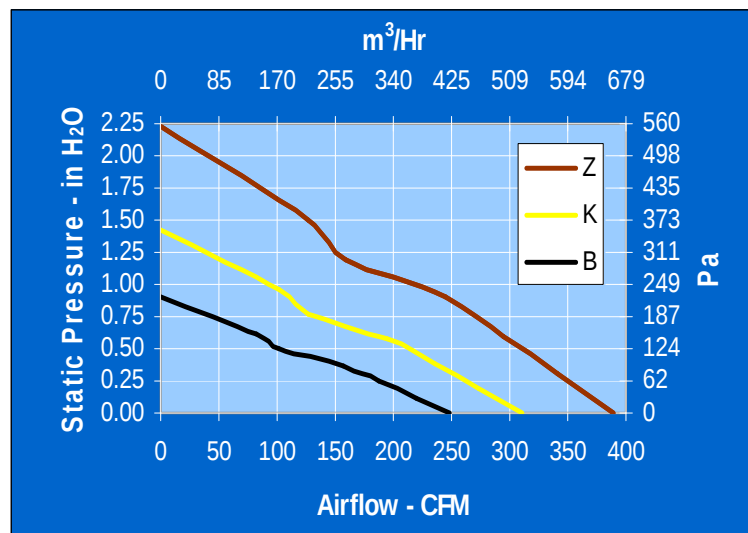

182 X 51 mm

Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m ³ /Hr	in H ₂ O	Pa	dBA
MFX24B	24	16 - 32	1.0	25	3232	250	423	0.91	227	59.4
MFX48B	48	24 - 72	0.5	25	3232	250	423	0.91	227	59.4
MFX24K	24	16 - 32	2.0	49	4040	311	529	1.43	355	64.3
MFX48K	48	24 - 72	1.0	49	4040	311	529	1.43	355	64.3
MFX24Z	24	16 - 32	4.0	96	5050	390	661	2.23	555	69.1
MFX48Z	48	24 - 72	2.0	96	5050	390	661	2.23	555	69.1

Предлагаем продукцию COMAIR
ROTRON
и другие (радиодетали) Беларусь
г. Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




Approvals Pending

Mixtus 7.9

E Series



MECHANICAL DRAWING

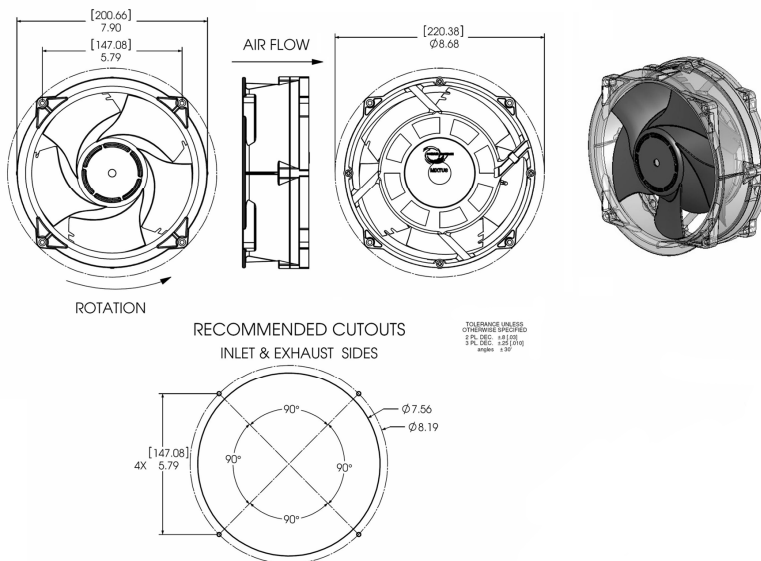


STANDARD FEATURES

- Size: 7.90" x 2.75" (200.66mm x 69.85mm)
- Nominal Operating Voltage: 24 or 48 VDC
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +80°C
- Permanently Lubricated Ball Bearings
- Termination: Lead Wires
- Two Piece, Die Cast Aluminum Venturi
- 12.0" 22 AWG, UL 1061 Style Lead Wires
- Propeller: PBT
- Weight: 4 lbs. (1.81 Kg)
- Life Expectancy: 70,000 hours @ 40° C

BENEFITS

- High Pressure Mixed Flow Cooling with Multiple Configurations to Meet Customers Needs
- Outstanding Airflow
- True Dependability with 18 Month Warranty
- High Performance Competitively Priced Fan
- Available Standard with Open Collector Tachometer & PWM

Performance Graph

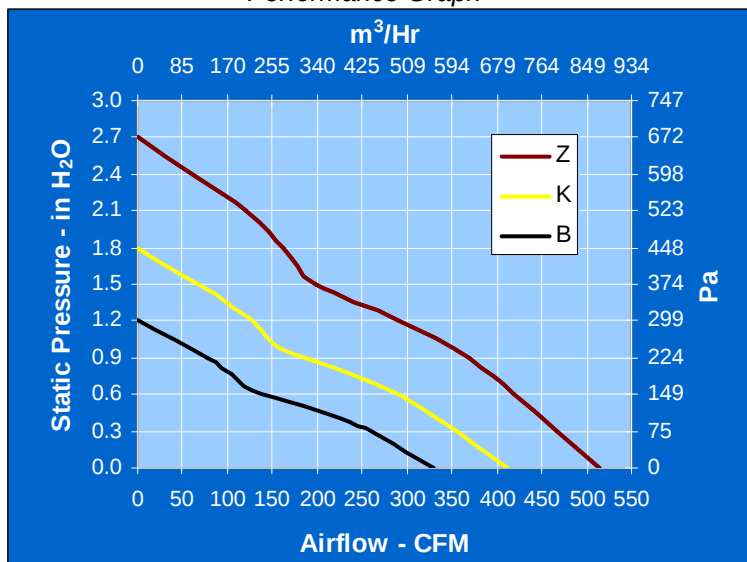

220 X 70 mm

Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m³/min	in H ₂ O	Pa	dBA
MFSE24B	24	16 - 32	1.0	29	2880	330	560	1.2	298	55.0
MFSE48B	48	24 - 72	0.6	29	2880	330	560	1.2	298	55.0
MFSE24K	24	16 - 32	2.0	48	3600	416	706	1.8	448	60.6
MFSE48K	48	24 - 72	1.0	48	3600	416	706	1.8	448	60.6
MFSE24Z	24	16 - 32	4.0	96	4500	520	883	2.7	672	65.4
MFSE48Z	48	24 - 72	2.0	96	4500	520	883	2.7	672	65.4


Предлагаем продукцию COMAIR
ROTRON
и другие (радиодетали) Беларусь
г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by



Diplomat DD4021



MECHANICAL DRAWING

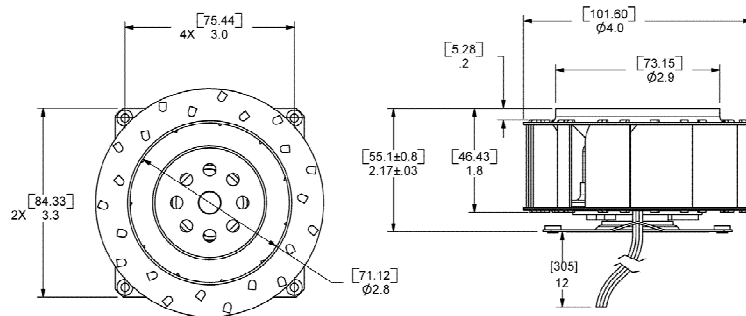


STANDARD FEATURES

- Size: 101.6x 55.1mm deep (4.0" x 2.17")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 355 g (0.783 lbs)
- Dual Ball Bearings
- Impeller: Aluminum
- Termination: Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Soft Start Capability
- Designed with optional performance Features

PERFORMANCE GRAPH

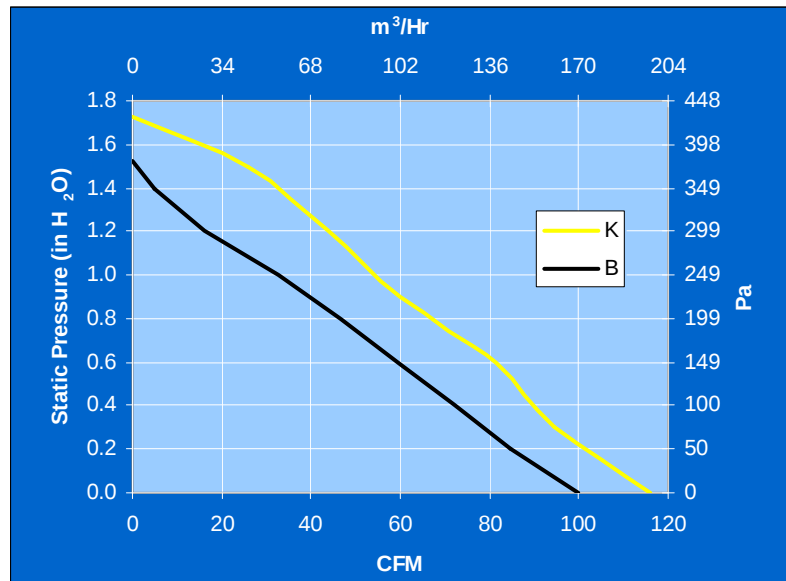

102 X 55 mm

Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m³/Hr	in H ₂ O	Pa	dBA
DD402112B	12	12 - 28	2.10	25.2	4950	100	170	1.64	408	59
DD402124B	24	24 - 56	0.92	22.1	4950	100	170	1.64	408	59
DD402148B	48	12 - 28	0.38	18.2	4950	100	170	1.64	408	59
DD402112K	12	24 - 56	2.75	33.0	5865	115	195	2.01	501	67
DD402124K	24	12 - 28	1.33	32.0	5865	115	195	2.01	501	67
DD402148K	48	24 - 56	0.81	39.0	5865	115	195	2.01	501	67

Предлагаем продукцию COMAIR
ROTRON
и другие (радиодетали) Беларусь
г. Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by



COMAIR ROTRON®



- ## ***BENEFITS***

-
- Technical drawings of the 1000 Series 1/2 HP Motor, showing front, side, and rear views, and a recommended cutout template.
- Front View (Top Left):**
- Outer diameter: $\phi 5.293$ (134.586)
 - Inner diameter: $\phi 3.560$ (90.624)
 - Flange thickness: 3.700 (93.980)
 - Flange outer diameter: 3.594 (91.344)
 - Flange inner diameter: 3.185 (80.959)
 - Flange width: 1.100 (27.940)
 - Flange hole diameter: $\phi 1.00$ (25.400)
 - Flange hole spacing: 3.000 (76.200)
 - Flange hole diameter: $\phi 1.00$ (25.400)
 - Flange hole spacing: 3.000 (76.200)
 - Flange hole diameter: $\phi 1.00$ (25.400)
 - Flange hole spacing: 3.000 (76.200)
- Side View (Top Right):**
- Motor body diameter: $\phi 4.200$ (106.590)
 - Motor body length: 3.118 (79.31)
 - Motor body outer diameter: $\phi 3.620$ (91.91)
 - Motor body inner diameter: $\phi 3.118$ (79.31)
 - Motor body width: 1.300 (33.02)
 - Motor body height: 1.000 (25.40)
 - Motor body length: 5.000 (127.0)
- Rear View (Bottom Left):**
- Outer diameter: $\phi 4.200$ (106.590)
 - Inner diameter: $\phi 3.560$ (90.624)
 - Flange thickness: 3.700 (93.980)
 - Flange outer diameter: 3.594 (91.344)
 - Flange inner diameter: 3.185 (80.959)
 - Flange width: 1.100 (27.940)
 - Flange hole diameter: $\phi 1.00$ (25.400)
 - Flange hole spacing: 3.000 (76.200)
 - Flange hole diameter: $\phi 1.00$ (25.400)
 - Flange hole spacing: 3.000 (76.200)
 - Flange hole diameter: $\phi 1.00$ (25.400)
 - Flange hole spacing: 3.000 (76.200)
- Recommended Cutout (Bottom Right):**
- Outer diameter: $\phi 4.200$ (106.590)
 - Inner diameter: $\phi 3.560$ (90.624)
 - Flange thickness: 3.700 (93.980)
 - Flange outer diameter: 3.594 (91.344)
 - Flange inner diameter: 3.185 (80.959)
 - Flange width: 1.100 (27.940)
 - Flange hole diameter: $\phi 1.00$ (25.400)
 - Flange hole spacing: 3.000 (76.200)
 - Flange hole diameter: $\phi 1.00$ (25.400)
 - Flange hole spacing: 3.000 (76.200)
 - Flange hole diameter: $\phi 1.00$ (25.400)
 - Flange hole spacing: 3.000 (76.200)
- Dimensions:**
- Dimensions: $\pm .001$
 - Tolerances: $\pm .001$
 - Angular: $\pm .001$
 - Unless noted

The graph displays the relationship between static pressure and airflow for two models, K and B. The x-axis represents Airflow in CFM (0 to 200). The left y-axis represents Static Pressure in H₂O (0.0 to 1.8), and the right y-axis represents Static Pressure in Pa (0 to 448). Model K is represented by a yellow line, and Model B is represented by a black line. Both models show a decrease in static pressure as airflow increases, with Model K consistently having higher static pressure than Model B.

Airflow - CFM	Static Pressure - in H ₂ O (Model K)	Static Pressure - in H ₂ O (Model B)
0	1.75	1.35
20	1.45	1.05
40	1.25	0.85
60	1.10	0.75
80	0.95	0.65
100	0.80	0.55
120	0.65	0.40
140	0.50	0.25
160	0.35	0.15
180	0.20	0.05
200	0.05	0.00

135 X 91 mm

approvals pending

Diplomat DD6921




STANDARD FEATURES

- Size: 175.26 mm x 53.34 mm deep (6.9" x 2.1")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 860 g (1.90 lbs)
- Dual Ball Bearings
- Impeller: Galvanized Metal
- Termination: Lead Wires


BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Soft Start Capability
- Designed with optional performance Features

MECHANICAL DRAWING

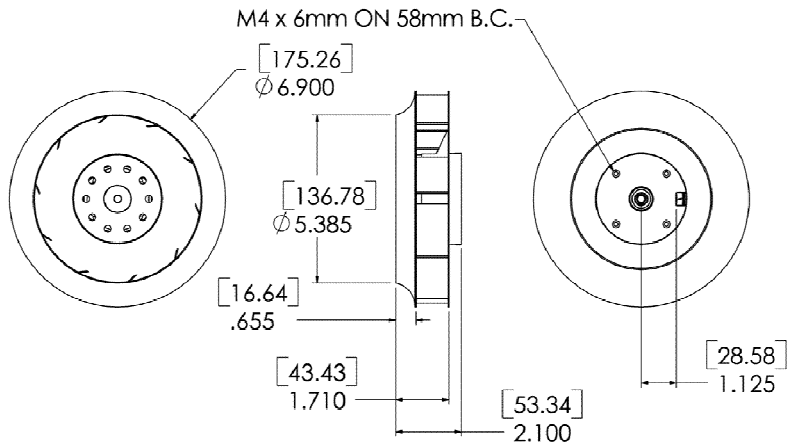

PERFORMANCE GRAPH

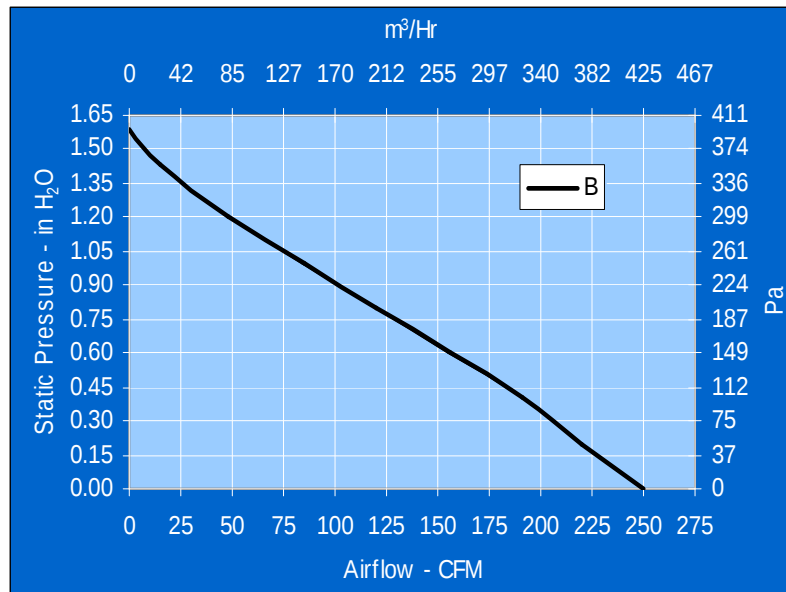

175 X 53 mm

Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m ³ /Hr	in H ₂ O	Pa	dBA
DD692112B	12	24 - 56	3.0	36	3085	250	425	1.6	398	68
DD692124B	24	12 - 28	1.3	31	3085	250	425	1.6	398	68
DD692148B	48	24 - 56	0.7	31	3085	250	425	1.6	398	68

Предлагаем продукцию COMAIR ROTRON

и другие (радиодетали)
Беларусь

г.Минск 8(017)200-56-46

www.fotorele.net e:mail

minsk17@tut.by



approvals pending

Diplomat DD7527




STANDARD FEATURES

- Size: 190.25 x 68.58 mm deep (7.50" x 2.70")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 1045 g (2.3 lbs)
- Dual Ball Bearings
- Impeller: Plastic
- Termination: Lead Wires


BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Soft Start Capability
- Designed with optional performance Features

MECHANICAL DRAWING

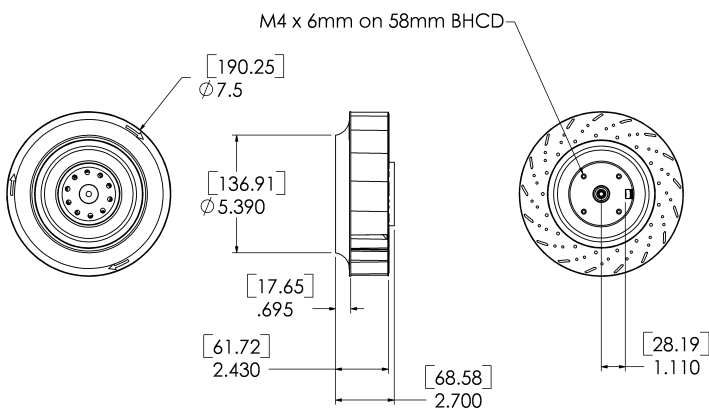

PERFORMANCE GRAPH

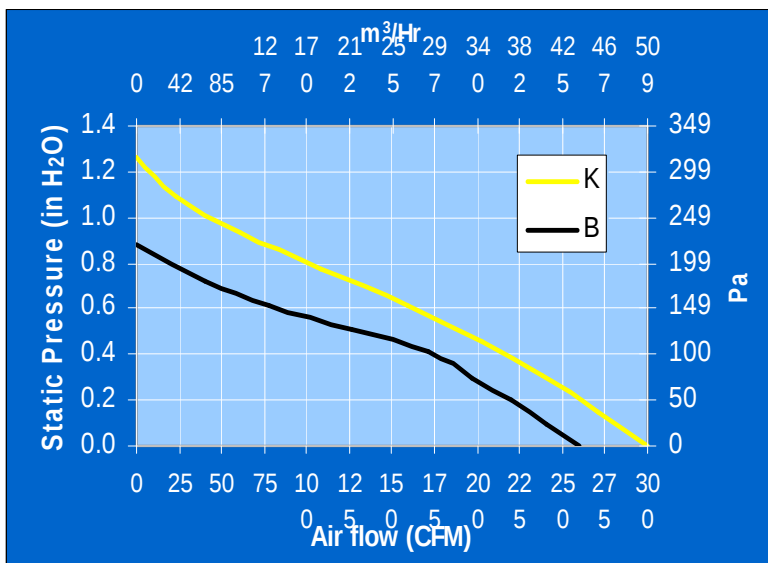

190 X 69 mm

Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m ³ /Hr	in H ₂ O	Pa	dBA
DD752712B	12	24 - 56	2.10	25.2	2020	264	380	0.9	224	58
DD752724B	24	12 - 28	1.14	27.4	2020	264	380	0.9	224	58
DD752748B	48	24 - 56	0.57	27.3	2020	264	380	0.9	224	58
DD752712K	12	24 - 56	3.50	42.0	2020	300	509	1.3	324	61
DD752724K	24	12 - 28	1.50	36.0	2020	300	509	1.3	324	61
DD752748K	48	24 - 56	0.70	33.6	2020	300	509	1.3	324	61

Предлагаем продукцию COMAIR
ROTRON и другие (радиодетали)
Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail mins17@tut.by




approvals pending

Diplomat 8928



MECHANICAL DRAWING

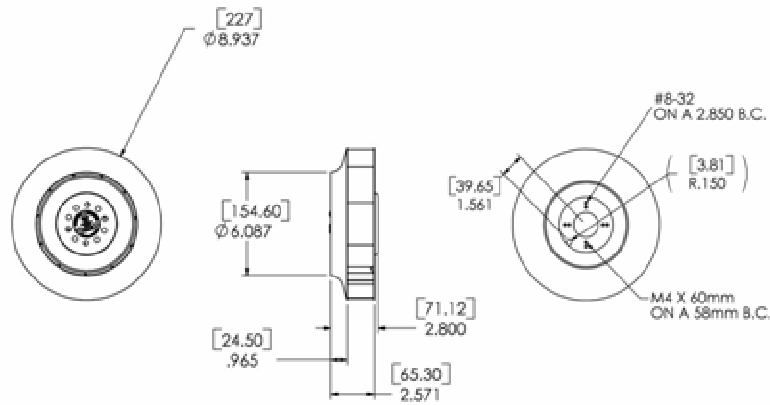


STANDARD FEATURES

- Size: 227 mm x 71.12 mm deep (8.94" x 2.80")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Dual Ball Bearings
- Impeller: Galvanized Metal
- Termination: Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Soft Start Capability
- Available Tachometer & PWM (Standard with the E-Series)

PERFORMANCE GRAPH

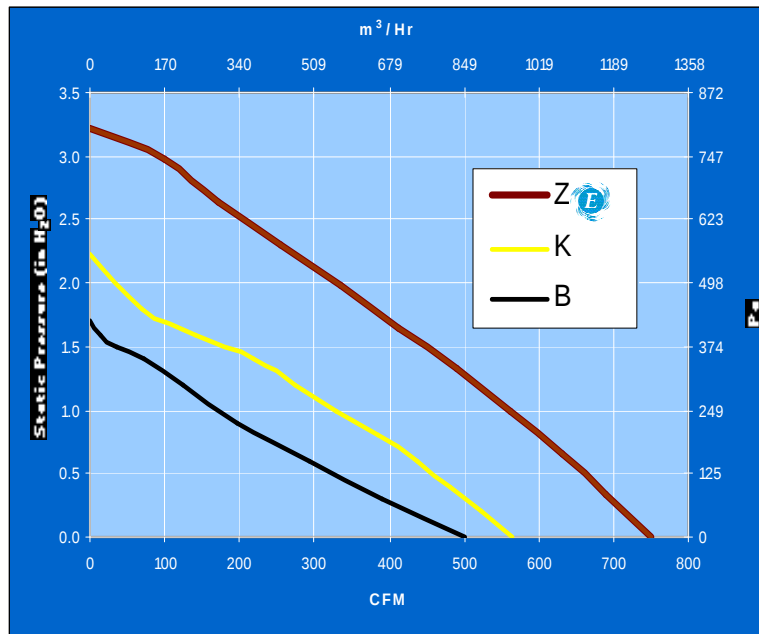

227 X 71 mm

Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m ³ /Hr	in H ₂ O	Pa	
DD892824B	24	16 - 32	2.7	64	2650	500	849	2.2	548	69.1
DD892848B	48	28 - 72	1.4	67	2650	500	849	2.2	548	69.1
DD892824K	24	16 - 32	4.1	98	2800	565	959	2.9	722	71.7
DD892848K	48	28 - 72	2.0	98	2800	565	959	2.9	722	71.7
DDE892824Z	24	16 - 32	6.2	149	3550	750	1274	3.2	797	78.7
DDE892848Z	48	28 - 72	3.0	149	3550	750	1274	3.2	797	78.7




= Products developed with new E-Series technology delivering higher performance, efficiency, and expanded feature sets.

Предлагаем продукцию COMAIR ROTRON и другие (радиодетали)
Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by



approvals pending

COMAIR ROTRON®

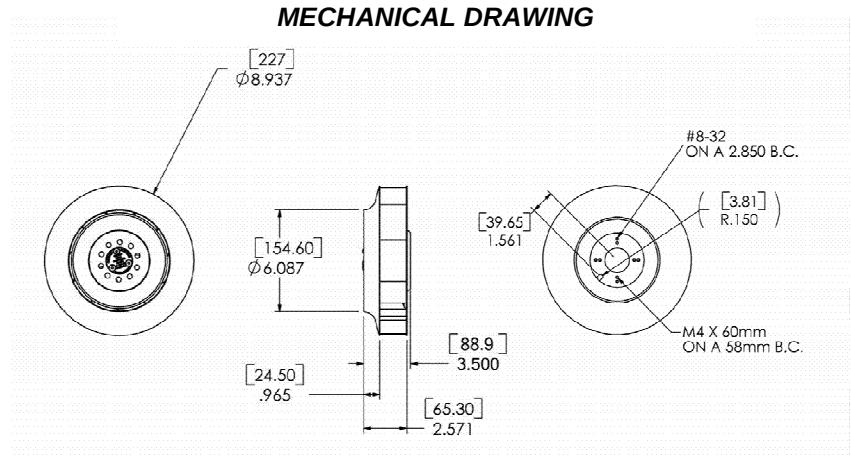


227 X 89 mm

approvals pending

Diplomat 8939



MECHANICAL DRAWING

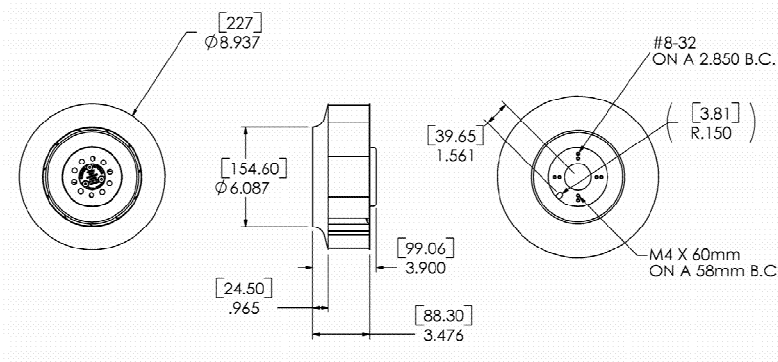


STANDARD FEATURES

- Size: 227 mm x 99.06 mm deep (8.9" x 3.9")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Dual Ball Bearings
- Impeller: Galvanized Metal
- Termination: Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Soft Start Capability
- Available Tachometer & PWM (Standard with the E-Series)

PERFORMANCE GRAPH

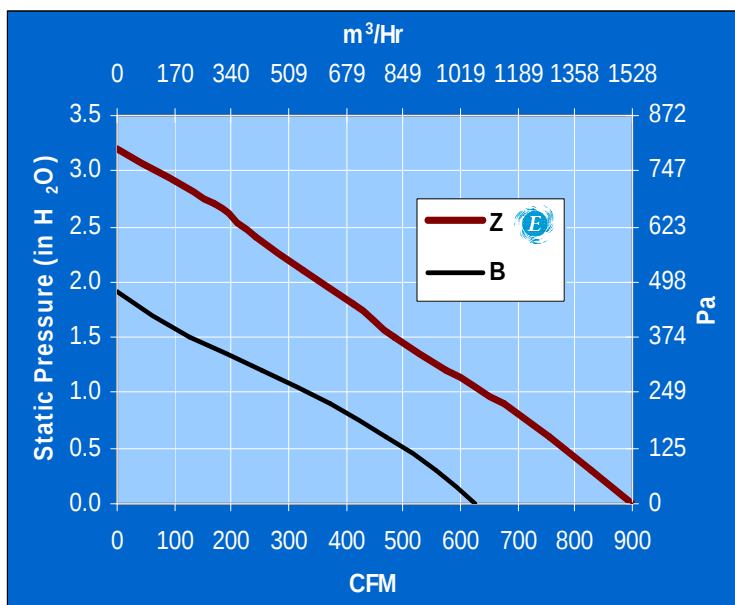

227 X 99 mm

Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m ³ /Hr	in H ₂ O	Pa	dBA
DD893924B	24	16 - 32	4.2	100	2650	625	1061	2.9	710	73
DD893948B	48	28 - 72	2.1	100	2650	625	1061	2.9	710	73
 DE893924Z	24	16 - 32	9.6	233	3369	900	1528	3.2	797	80
 DE893948Z	48	28 - 72	4.8	234	3369	900	1528	3.2	797	80




= Products developed with new E-Series technology delivering higher performance, efficiency, and expanded feature sets.

Предлагаем продукцию COMAIR ROTRON и другие (радиодетали)
Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by



approvals pending

COMAIR ROTRON®

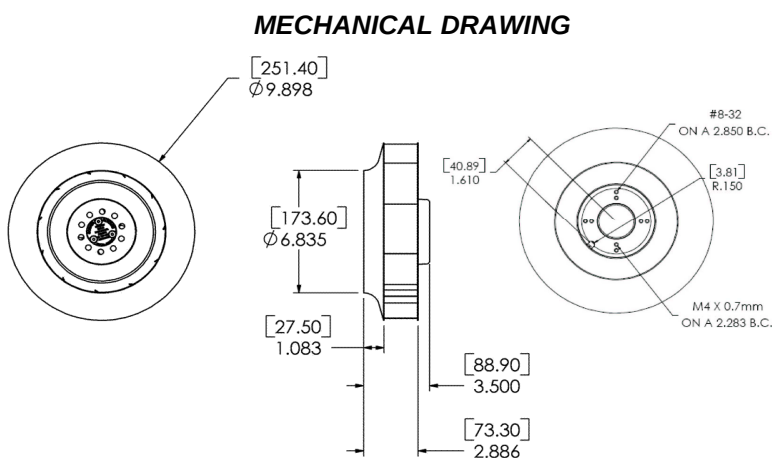

252 X 89 mm




approvals pending

E-Series



MECHANICAL DRAWING

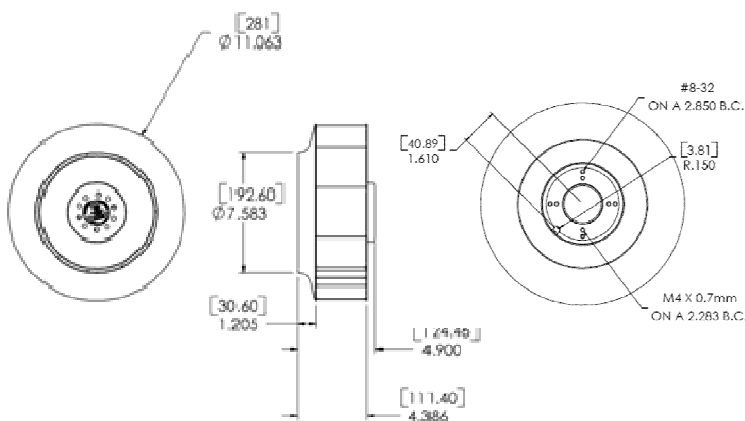


PERFORMANCE GRAPH

STANDARD FEATURES

- Size: 281 mm x 124.46 mm deep
(11.0" x 4.9")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Dual Ball Bearings
- Impeller: Galvanized Steel
- Termination: Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Soft Start Capability
- Tachometer & PWM Standard

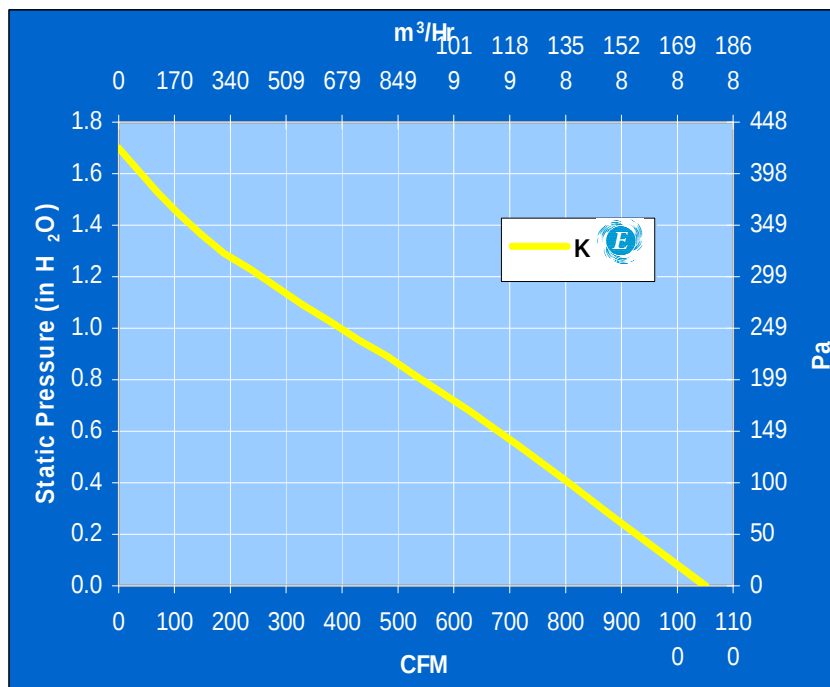

281 X 125 mm

	Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
		VDC	VDC	Amps	Watts	RPM	CFM	m³/Hr	in H₂O	Pa	dBA
	DDE114924K	24	16 - 32	5.4	130	1919	1070	1817	1.9	463	74
	DDE114948K	48	28 - 72	2.7	130	1919	1070	1817	1.9	463	74



= Products developed with new E-Series technology delivering higher performance, efficiency, and expanded feature sets.

Предлагаем продукцию COMAIR
ROTRON и другие (радиодетали)
Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Whiffet DC



MECHANICAL DRAWING

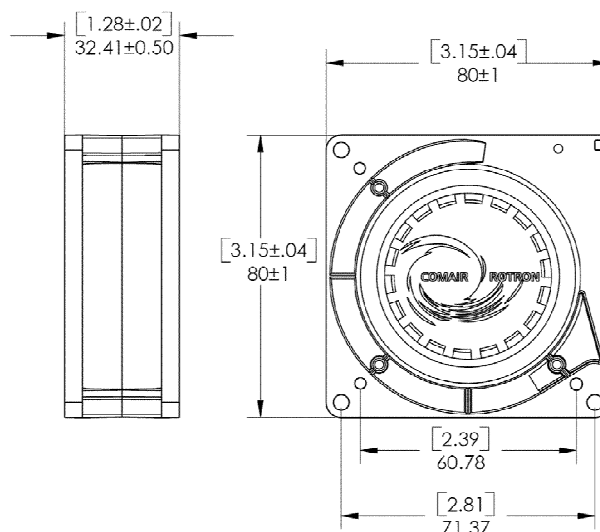


STANDARD FEATURES

- Size: 80 x 32.41mm deep (3.14" x 1.26")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 190g (5.9 oz.)
- Dual Ball Bearings
- Impeller: Plastic
- Venturi: Plastic
- 12" Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

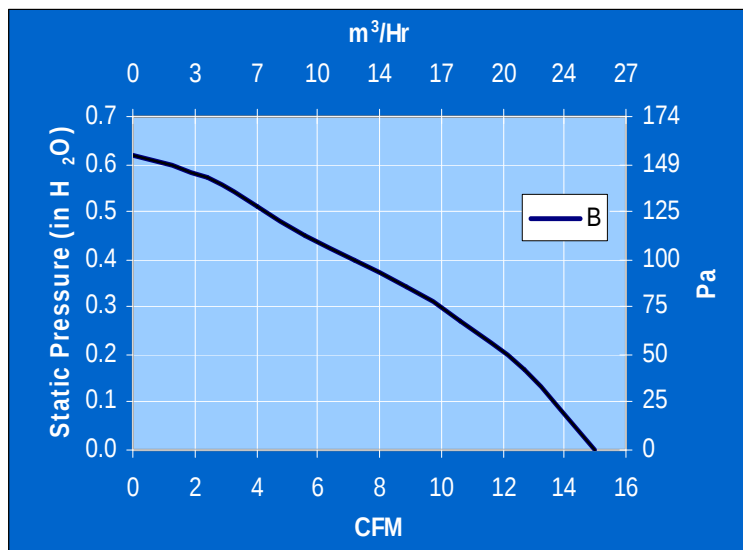

80 x 32mm

Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m³/Hr	in H ₂ O	Pa	dBA
WT12B	12	6 - 14	0.42	5.0	4050	15	26	0.62	154	52.2
WT24B	24	12 - 28	0.20	4.8	4050	15	26	0.62	154	52.2
WT48B	48	24 - 56	0.14	6.7	4050	15	26	0.62	154	52.2

Предлагаем продукцию COMAIR
ROTRON и другие (радиодетали)
Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by





approvals pending

Ambassador



MECHANICAL DRAWING

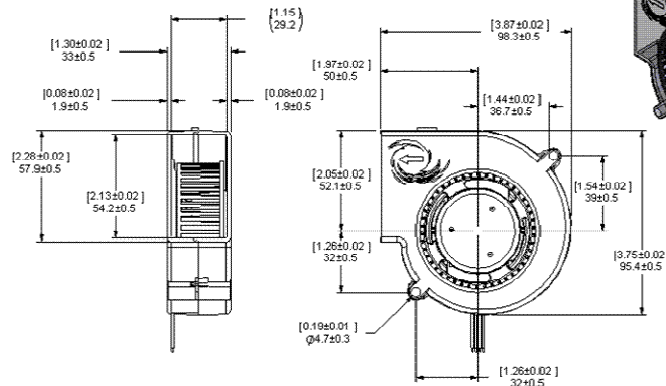


STANDARD FEATURES

- Size: 98.3mm x 33mm deep (3.85" x 1.3")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 200 g (0.44 lbs)
- Dual Ball Bearings
- Impeller: PC (Lexan Grade)
- Housing: PBT (Valox Grade)
- 12" Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Soft Start Capability
- Available with Standard Open Collector Tachometer & PWM

PERFORMANCE GRAPH

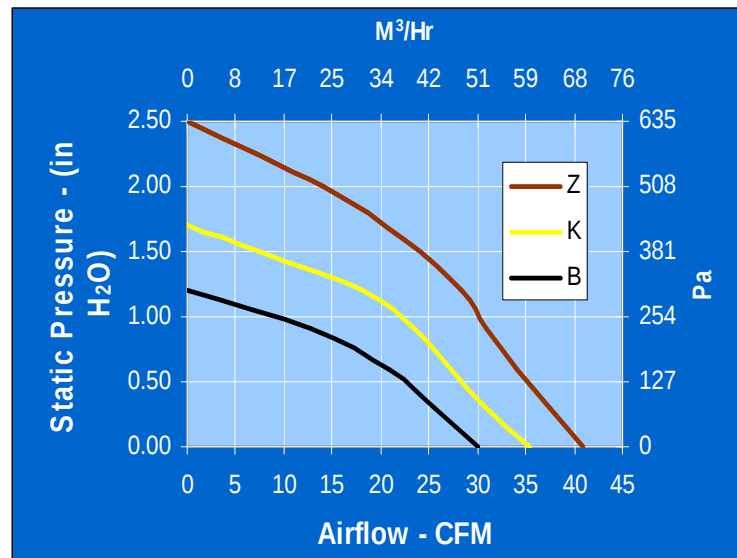

98 X 33 mm

Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m ³ /Hr	in H ₂ O	Pa	dBA
AMD12B	12	7 - 13.5	0.8	9.0	3750	30	51	1.1	274	55
AMD24B	24	16 - 28	0.4	9.0	3750	30	51	1.1	274	55
AMD12K	12	7 - 13.5	1.3	15.0	4400	36	61	1.7	423	56
AMD24K	24	16 - 28	0.6	15.0	4400	36	61	1.7	423	56
AMD24Z	24	16 - 28	0.8	20.5	5000	41	69	2.5	622	59

Предлагаем продукцию COMAIR
ROTRON и другие (радиодетали)
Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approval pending

Biscuit DC



MECHANICAL DRAWING

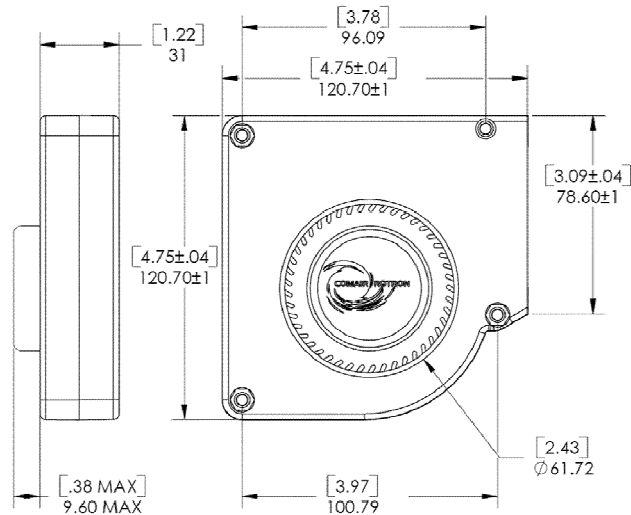


STANDARD FEATURES

- Size: 120.7 x 40.6mm deep (4.75" x 1.60")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 280g (10oz.)
- Dual Ball Bearings
- Impeller: Glass Filled Nylon
- Venturi: Polypropylene
- 12" Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

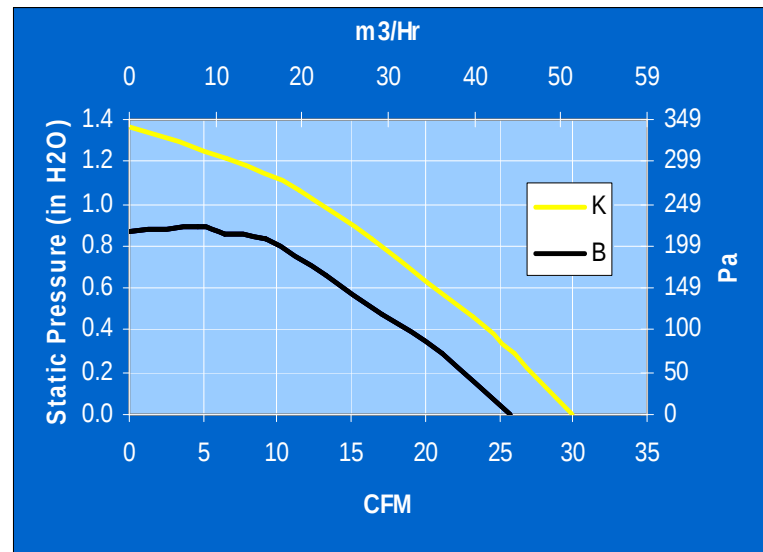

121 x 41 mm

Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m ³ /Hr	in H ₂ O	Pa	dBA
BD12B	12	6 - 14	0.90	10.8	3040	26	44	0.87	217	51.2
BD24B	24	12 - 28	0.48	11.5	3040	26	44	0.87	217	51.2
BD48B	48	24 - 56	0.25	12.0	3040	26	44	0.87	217	51.2
BD12K	12	6 - 14	1.4	16.8	3750	30	51	1.36	339	53.5
BD24K	24	12 - 28	0.66	15.8	3750	30	51	1.36	339	53.5
BD48K	48	24 - 56	0.28	13.5	3750	30	51	1.36	339	53.5

Предлагаем продукцию COMAIR
ROTRON и другие (радиодетали)
Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Viking DC



MECHANICAL DRAWING

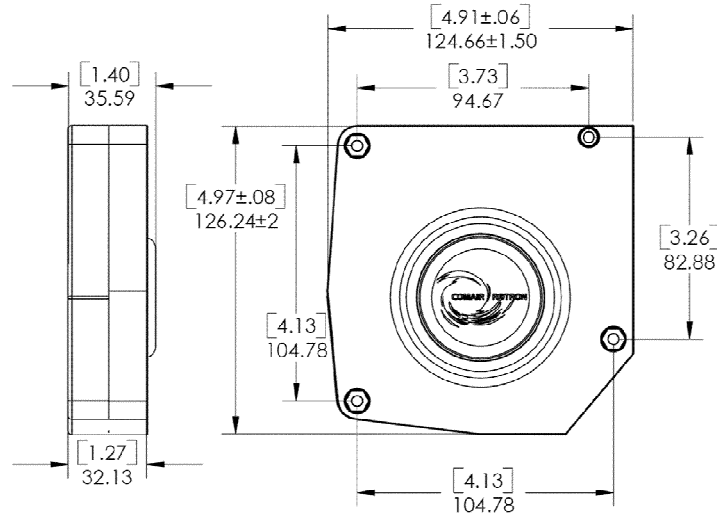


STANDARD FEATURES

- Size: 126.24 x 35.59mm deep (5.0" x 1.6")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 450g (14.5 oz.)
- Dual Ball Bearings
- Impeller: Polypropylene
- Venturi: Polycarbonate
- 12" Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

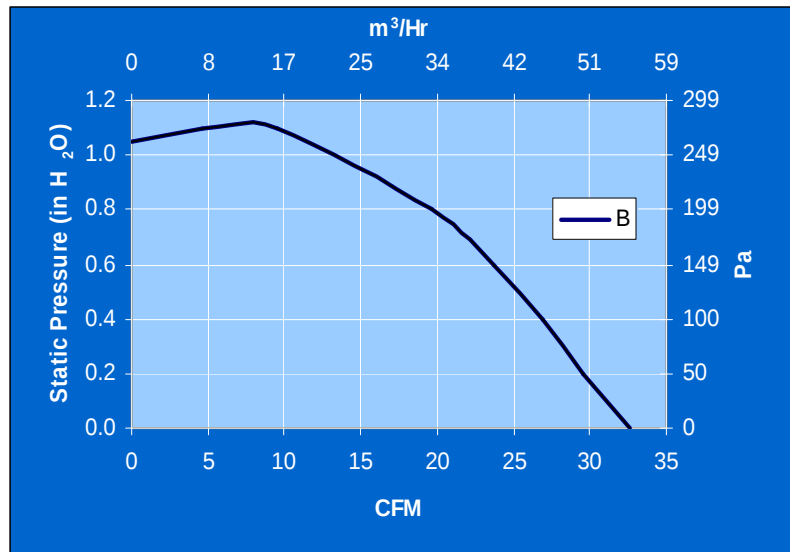

127 x 36mm

Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m³/Hr	in H ₂ O	Pa	
VK12B	12	6 - 14	1.34	16.0	4000	33	56	1.1	274	57.6
VK24B	24	12 - 28	0.63	19.2	4000	33	56	1.1	274	57.6
VK48B	48	24 - 56	0.36	17.3	4000	33	56	1.1	274	57.6

Предлагаем продукцию COMAIR
ROTRON и другие (радиодетали)
Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Spinnaker DC



MECHANICAL DRAWING

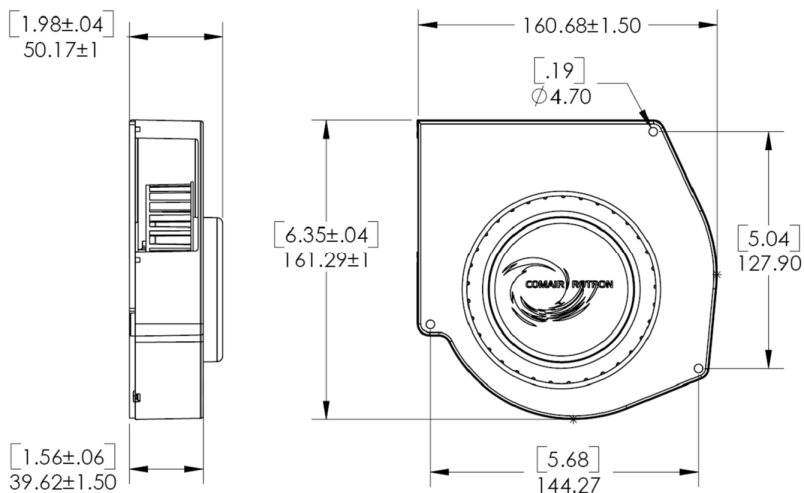


STANDARD FEATURES

- Size: 161.29 x 50.17mm deep (6.35" x 1.98")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 953g (2.1 lbs.)
- Dual Ball Bearings
- Impeller: Polycarbonate
- Venturi: Polycarbonate
- 12" Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

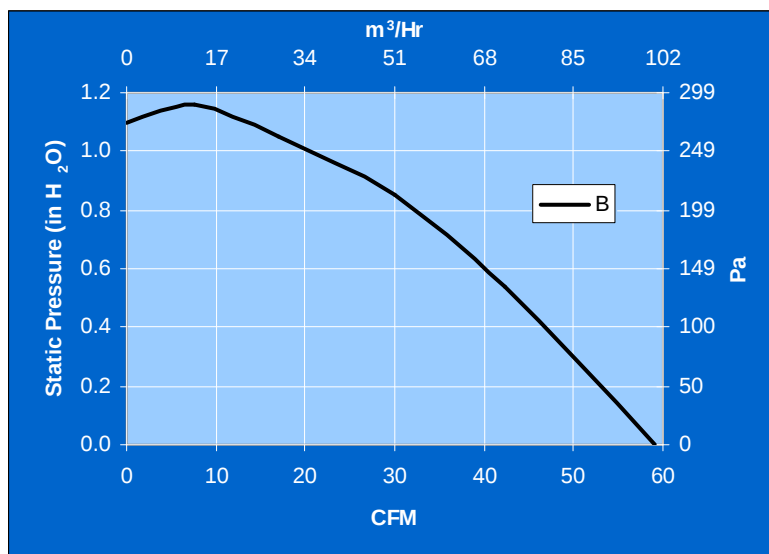

161 x 50mm

Model Number	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VDC	VDC	Amps	Watts	RPM	CFM	m³/Hr	in H ₂ O	Pa	
SPD12B	12	6 - 14	2.20	26.4	2500	60	102	1.1	274	50.7
SPD24B	24	12 - 28	1.25	30.0	2500	60	102	1.1	274	50.7
SBD48B	48	24 - 56	0.53	24.0	2500	60	102	1.1	274	50.7

Предлагаем продукцию COMAIR
ROTRON и другие (радиодетали)
Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Sprite AC

High Airflow



MECHANICAL DRAWING

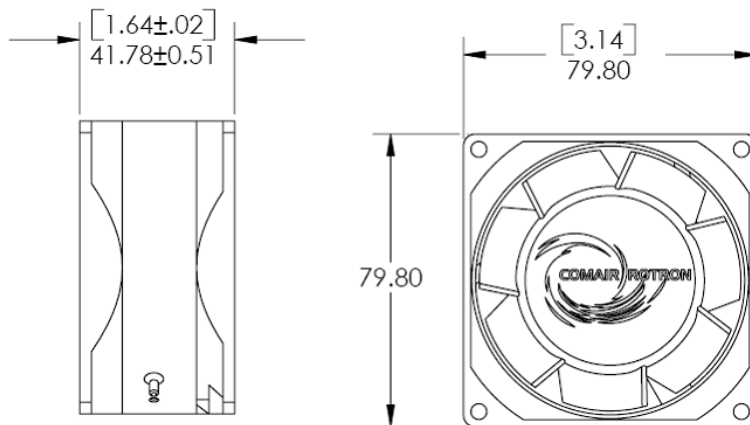


STANDARD FEATURES

- Size: 79.8 x 41.78 mm deep (3.14" x 1.65")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 510 g (18 oz.)
- Sleeve Bearings
- Impeller: Polypropylene
- Venturi: Metal Alloy
- 12" Lead Wires
- Available in 50/60 Hz

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

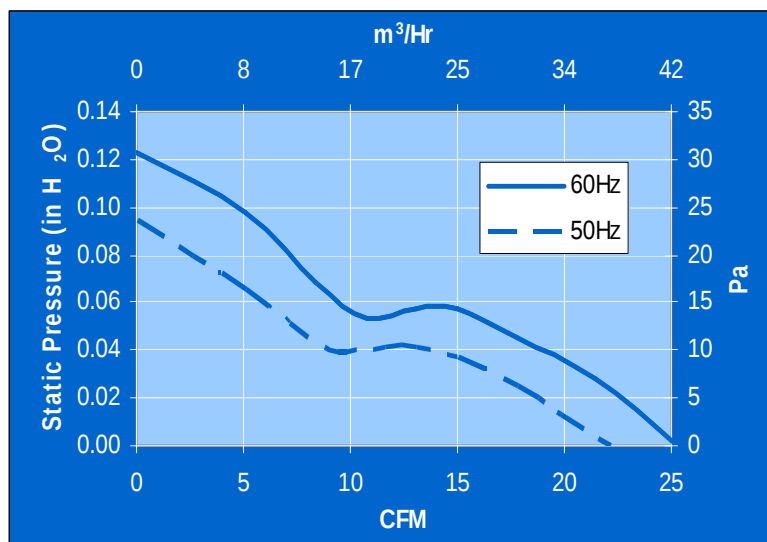

80 x 42 mm

Model Number	Rated Voltage	Hertz	Running Current	Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VAC					CFM	m³/Hr	In H ₂ O	Pa	
SU2E7	115	60	0.07	6	2750	25	43	0.12	31	32.2
SU3E7	220/230	60	0.06	10	2750	25	43	0.12	31	32.2




Sprite AC

High Pressure



MECHANICAL DRAWING

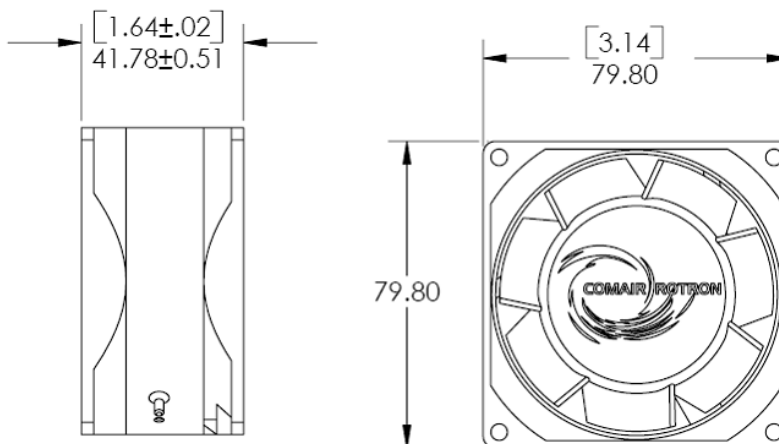


STANDARD FEATURES

- Size: 79.8 x 41.8 mm deep (3.14" x 1.65")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 510 g (18 oz.)
- Sleeve Bearings
- Impeller: Polypropylene
- Venturi: Metal Alloy
- 12" Lead Wires
- Available in 50/60 Hz

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

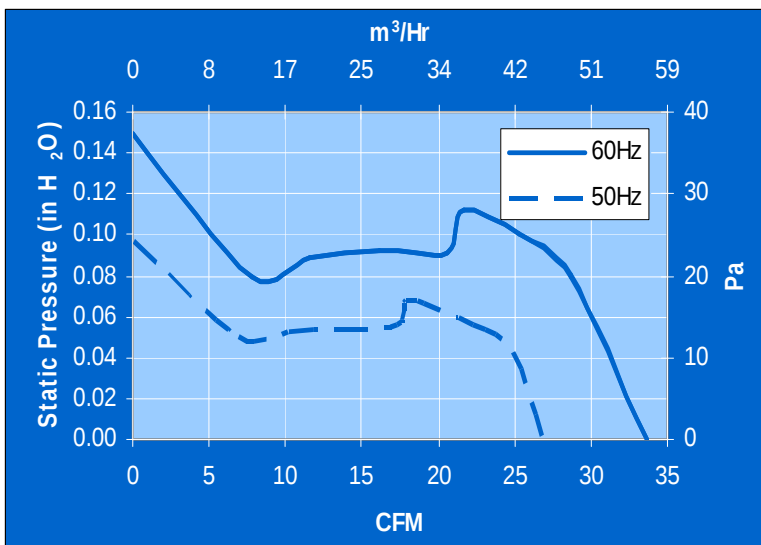

80 x 42 mm

Model Number	Rated Voltage	Hertz	Running Current	Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VAC					CFM	m ³ /Hr	In H ₂ O	Pa	
SU2A7	115	60	0.15	11	3350	34	58	0.15	37	40.3
SU3A7	220/230	60	0.08	13	3350	34	58	0.15	37	40.3

Предлагаем продукцию COMAIR
ROTRON и другие (радиодетали)
Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Whisper AC



MECHANICAL DRAWING

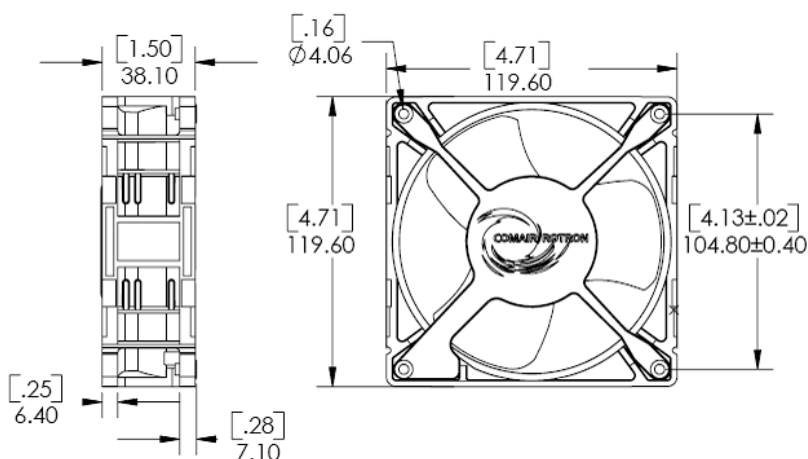


STANDARD FEATURES

- Size: 119.6 x 38.1 mm deep (4.71" x 1.5")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 490 g (17 oz.)
- Sleeve Bearings
- Impeller: Polypropylene
- Venturi: Metal Alloy
- 12" Lead Wires
- Available in 50/60 Hz

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

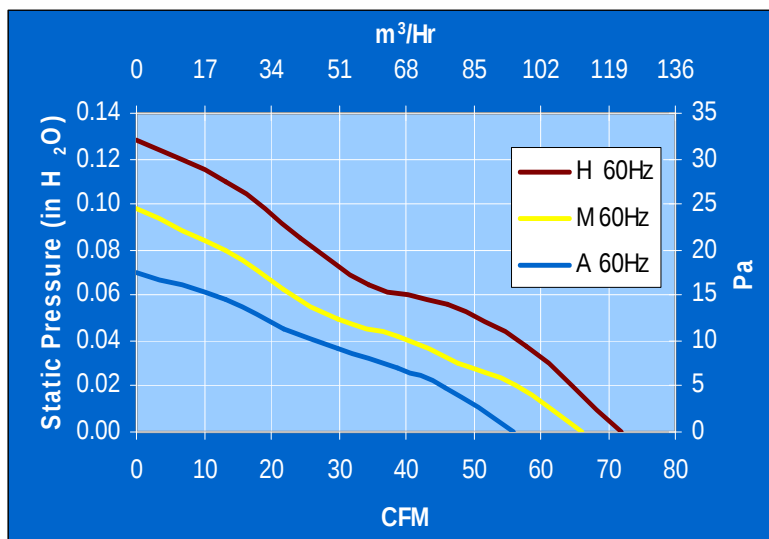

120 x 38 mm

Model Number	Rated Voltage	Hertz	Running Current	Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VAC	Hz	Amps	Watts	RPM	CFM	m³/Hr	In H ₂ O	Pa	Dba
WR2A1	115	60	0.06	7	1660	56	95	0.07	17	32.0
WR2M1	115	60	0.07	7	2000	66	112	0.10	24	33.3
WR3M1	220/230	60	0.07	12	2000	66	112	0.10	24	33.3
WR2H1	115	60	0.11	10	2400	72	122	0.13	32	37.6
WR3H1	220/230	60	0.06	12	2400	72	122	0.13	32	37.6

Предлагаем продукцию COMAIR
ROTRON и другие (радиодетали)
Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Whisper XL AC



MECHANICAL DRAWING

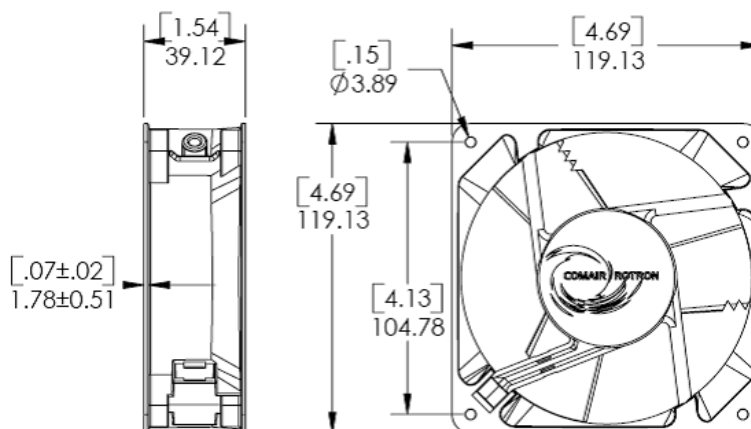


STANDARD FEATURES

- Size: 119.13 x 39.12 mm deep (4.69" x 1.54")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 610 g (21 oz.)
- Sleeve Bearings
- Impeller: Polypropylene
- Venturi: Metal Alloy
- 12" Lead Wires
- Available in 50/60 Hz

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

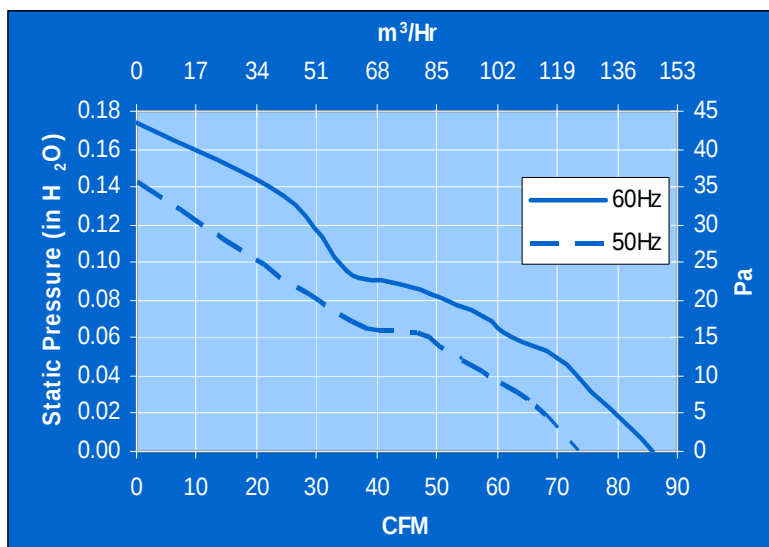

120 x 39 mm

Model Number	Rated Voltage	Hertz	Running Current	Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VAC	Hz	Amps	Watts	RPM	CFM	m³/Hr	In H ₂ O	Pa	DbA
WX2H1	115	60	0.15	13	2500	85	144	0.17	43	37.1
WX3H1	220/230	60	0.09	13	2500	85	144	0.17	43	37.1

Предлагаем продукцию COMAIR ROTRON и другие (радиодетали)
Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Muffin AC



MECHANICAL DRAWING

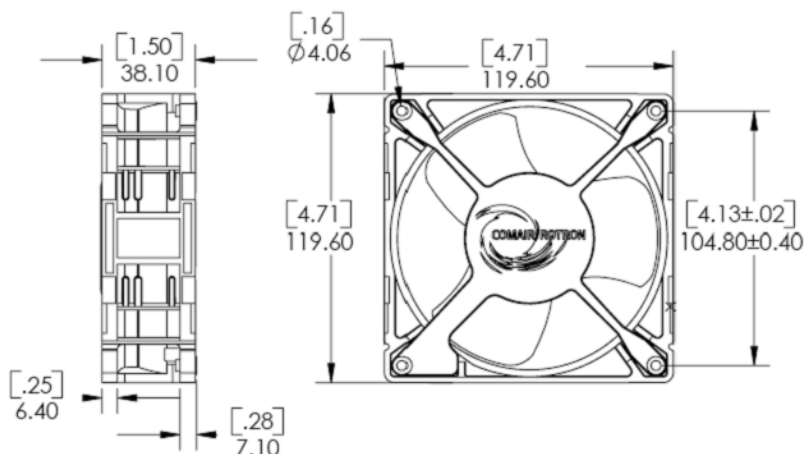


STANDARD FEATURES

- Size: 119.6 x 38.1 mm deep (4.71" x 1.5")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 490 g (17.2 oz.)
- Dual Ball Bearings
- Impeller: Polypropylene
- Venturi: Metal Alloy
- 12" Lead Wires
- Available in 50/60 Hz

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

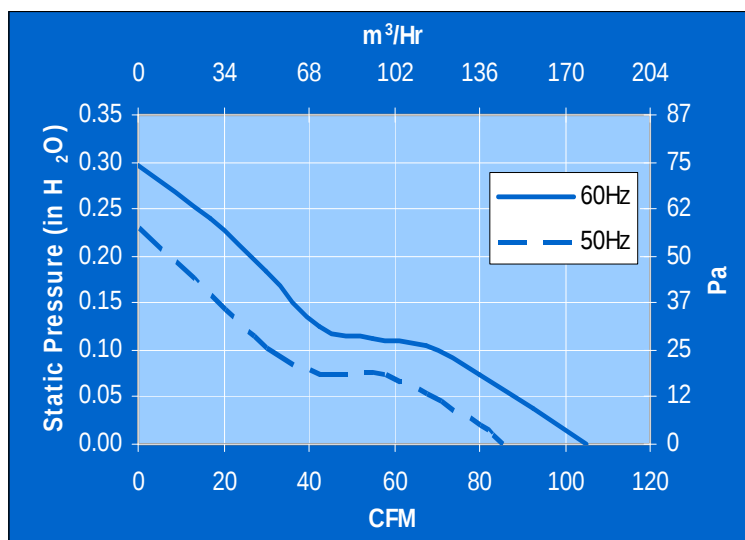

120 x 38 mm

Model Number	Rated Voltage	Hertz	Running Current	Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VAC	Hz	Amps	Watts	RPM	CFM	m³/Hr	In H ₂ O	Pa	Dba
MU2B3	115	60	0.16	14	3100	105	178	0.30	75	45.1
MU3B1	220/230	60	0.09	14	3100	105	178	0.30	75	45.1

Предлагаем продукцию COMAIR
ROTRON и другие (радиодетали)
Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Muffin XL AC



MECHANICAL DRAWING

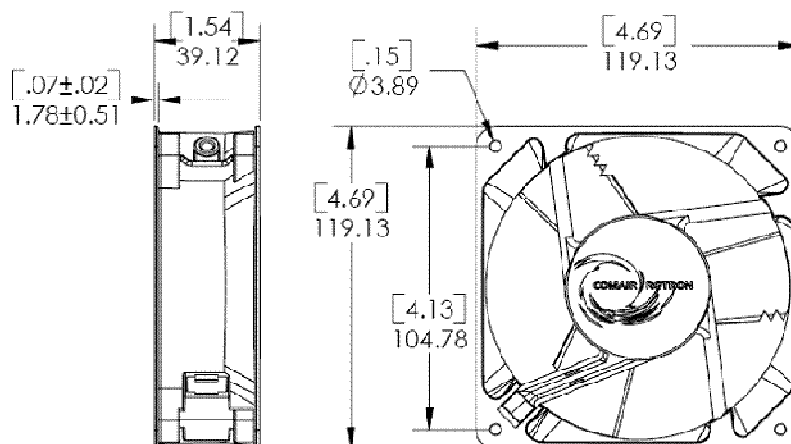


STANDARD FEATURES

- Size: 119.13 x 39.12 mm deep (4.69" x 1.54")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 610 g (21 oz.)
- Dual Ball Bearings
- Impeller: Polypropylene
- Venturi: Metal Alloy
- 12" Lead Wires
- Available in 50/60 Hz

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

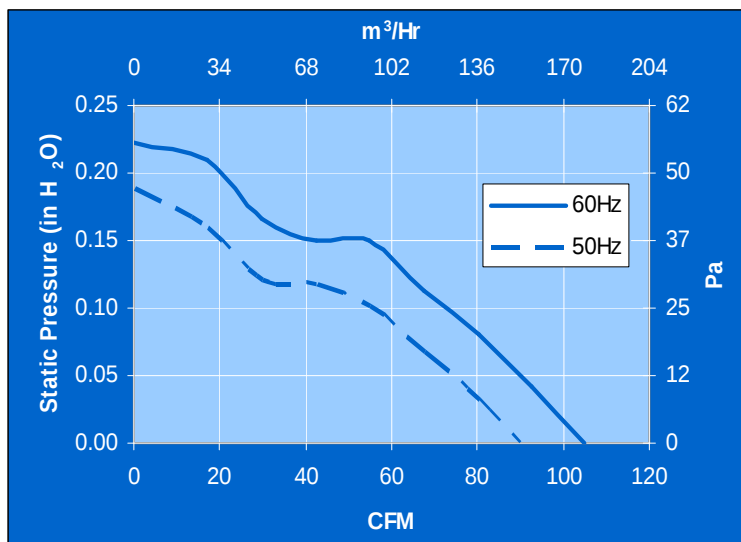

120 x 39 mm

Model Number	Rated Voltage	Hertz	Running Current	Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VAC					CFM	m ³ /Hr	In H ₂ O	Pa	
MX2B1	115	60	0.18	15	3100	105	178	0.22	55	47.6
MX3B1	220/230	60	0.09	16	3100	105	178	0.22	55	47.6

Предлагаем продукцию COMAIR
ROTRON и другие (радиодетали)
Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Major XT AC



MECHANICAL DRAWING

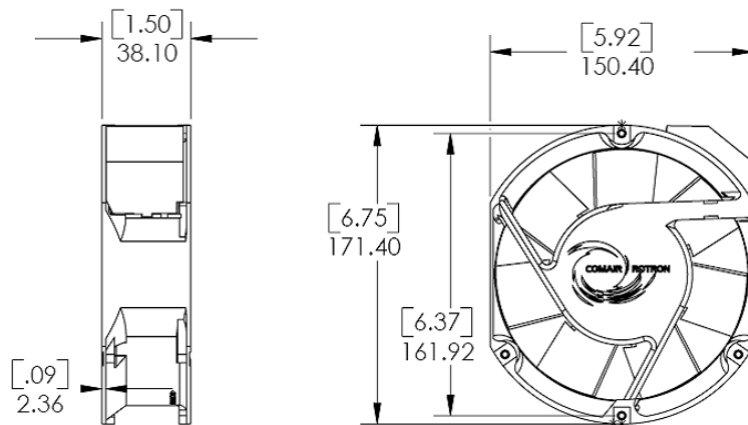

172 x 38 mm


STANDARD FEATURES

- Size: 171.4 x 38.1 mm deep (6.75" x 1.5")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 720 g (1.6 lbs.)
- Dual Ball Bearings
- Impeller: Polycarbonate
- Venturi: Metal Alloy
- 12" Lead Wires
- Available in 50/60 Hz

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

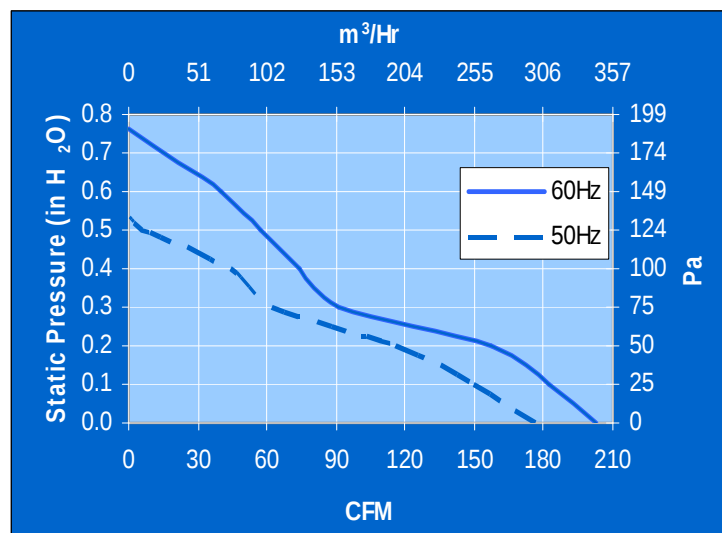

Model Number	Rated Voltage	Hertz	Running Current	Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VAC	Hz	Amps	Watts	RPM	CFM	m³/Hr	In H ₂ O	Pa	DbA
ME2B3	115	60	0.27	31	3275	203	345	0.76	189	56
ME77B3	220/230	60	0.14	35	3275	203	345	0.76	189	56

Предлагаем продукцию COMAIR
ROTRON и другие (радиодетали)
Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Major AC



MECHANICAL DRAWING

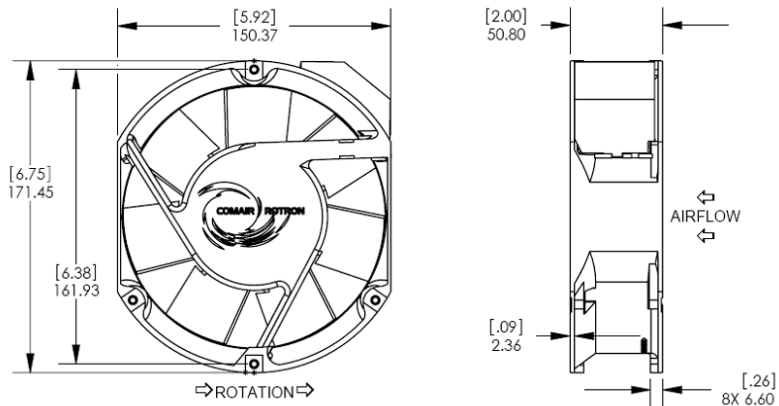


STANDARD FEATURES

- Size: 171.45 x 150.37 x 50.8mm deep (6.75" x 5.92" x 2")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 840 g (1.84 lbs.)
- Dual Ball Bearings
- Impeller: Polycarbonate
- Venturi: Metal Alloy
- 12" Lead Wires
- Available in 50/60 Hz

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

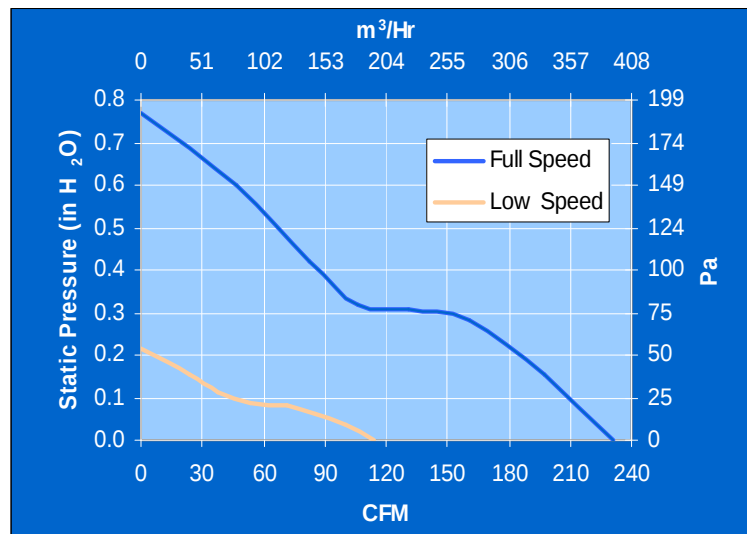

172 x 150 x 51 mm

Model Number	Rated Voltage	Hertz	Running Current	Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VAC	Hz	Amps	Watts	RPM	CFM	m³/Hr	In H ₂ O	Pa	DbA
MR2B3	115	60	0.26	31	3350	235	399	0.77	192	55.8
MR77B3	220/230	60	0.14	30	3350	235	399	0.77	192	55.8
MR2D3	115	60	0.15	16	1700	114	194	0.21	52	39.2
MR77D3	220/230	60	0.08	15	1700	114	194	0.21	52	39.2

Предлагаем продукцию COMAIR
 ROTRON и другие (радиодетали)
 Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Patriot AC



MECHANICAL DRAWING

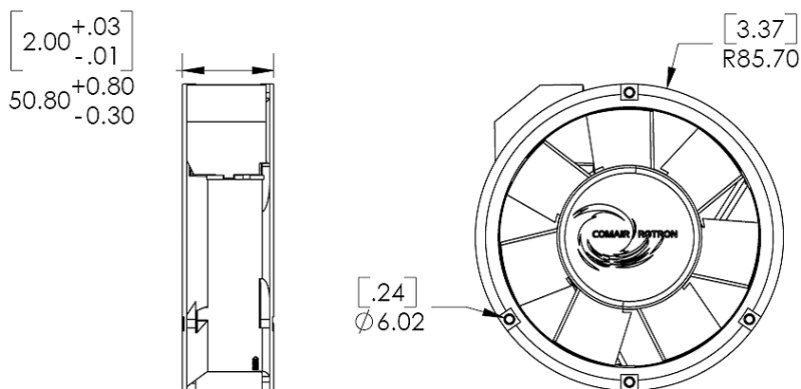


STANDARD FEATURES

- Size: 171.5 x 50.8mm deep (6.75" x 2")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 840 g (1.84 lbs.)
- Dual Ball Bearings
- Impeller: Polycarbonate
- Venturi: Metal Alloy
- 12" Lead Wires
- Available in 50/60 Hz

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

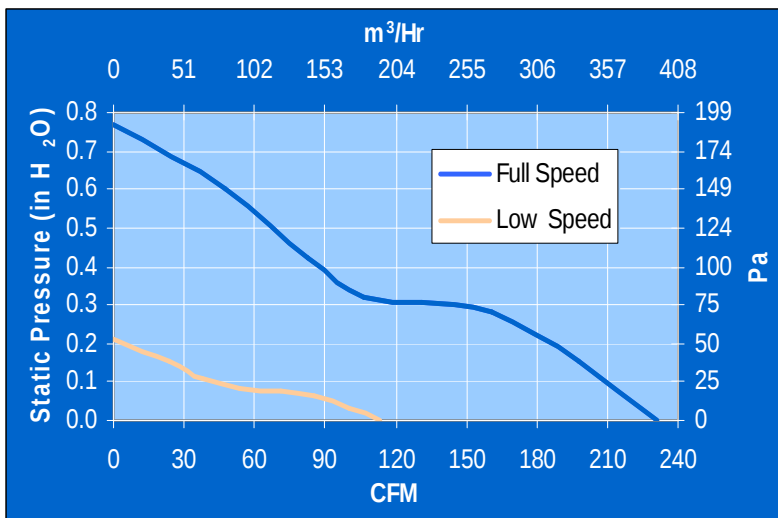

172 x 50 mm

Model Number	Rated Voltage	Hertz	Running Current	Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VAC					CFM	m³/Hr	In H ₂ O	Pa	
PT2B3	115	60	0.26	31	3350	235	399	0.77	192	55.8
PT77B3	220/230	60	0.14	30	3350	235	399	0.77	192	55.8
PT2D3	115	60	0.15	16	1700	114	194	0.21	52	39.2
PT77D3	220/230	60	0.08	15	1700	114	194	0.21	52	39.2

Предлагаем продукцию COMAIR
ROTRON и другие (радиодетали)
Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Maltese AC



MECHANICAL DRAWING

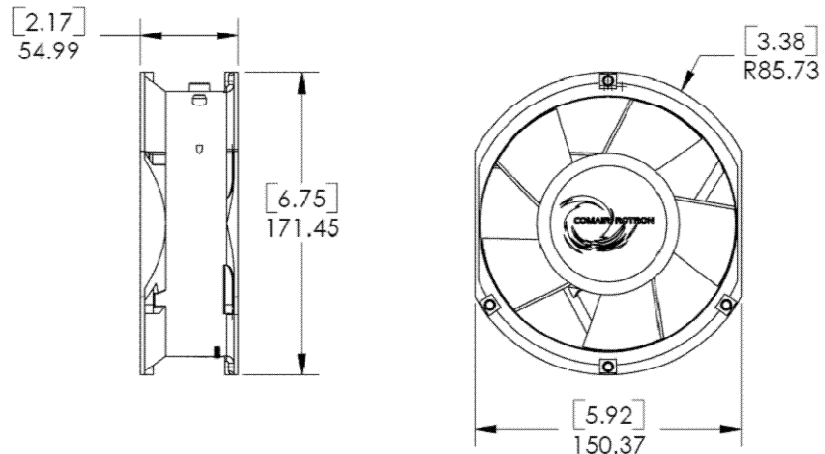


STANDARD FEATURES

- Size: 171.45 x 150.37 x 54.99mm deep (6.75" x 5.92" x 2.17")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 1 Kg (2.25 lbs.)
- Dual Ball Bearings
- Impeller: Polycarbonate
- Venturi: Metal Alloy
- 12" Lead Wires
- Available in 50/60 Hz

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

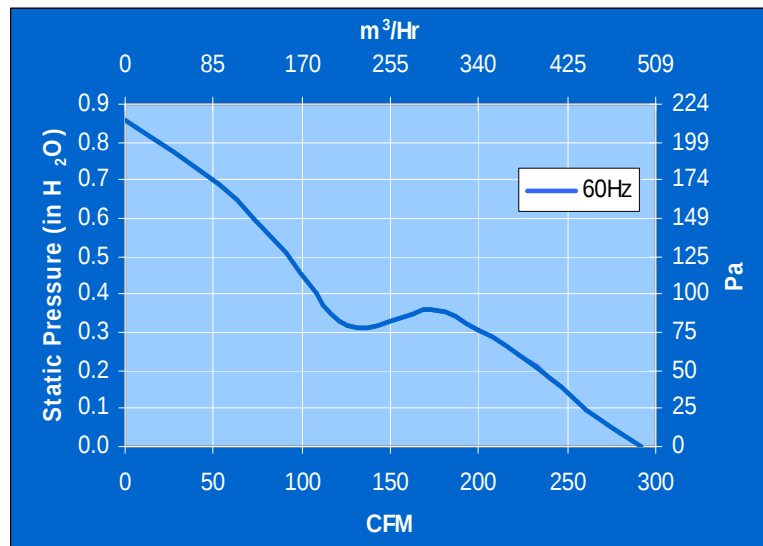

172 x 150 x 55mm

Model Number	Rated Voltage	Hertz	Running Current	Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VAC	Hz	Amps	Watts	RPM	CFM	m³/Hr	In H ₂ O	Pa	DbA
MA2B3	115	60	0.36	41.4	3400	300	509	0.86	214	56.5
MA77B3	230	60	0.18	41.4	3400	300	509	0.86	214	56.5


Предлагаем продукцию COMAIR
ROTRON и другие (радиодетали)
Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by



Falcon AC



MECHANICAL DRAWING

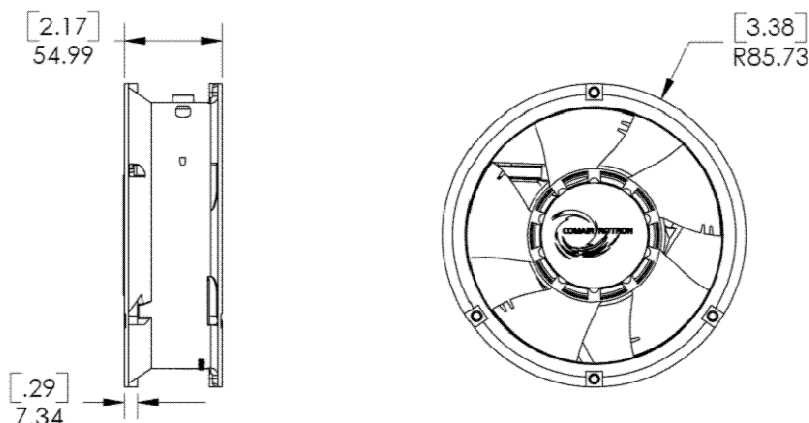


STANDARD FEATURES

- Size: 171.46 x 54.99mm deep (6.75" x 2.17")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 1 Kg (2.25 lbs.)
- Dual Ball Bearings
- Impeller: Polycarbonate
- Venturi: Metal Alloy
- 12" Lead Wires
- Available in 50/60 Hz

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

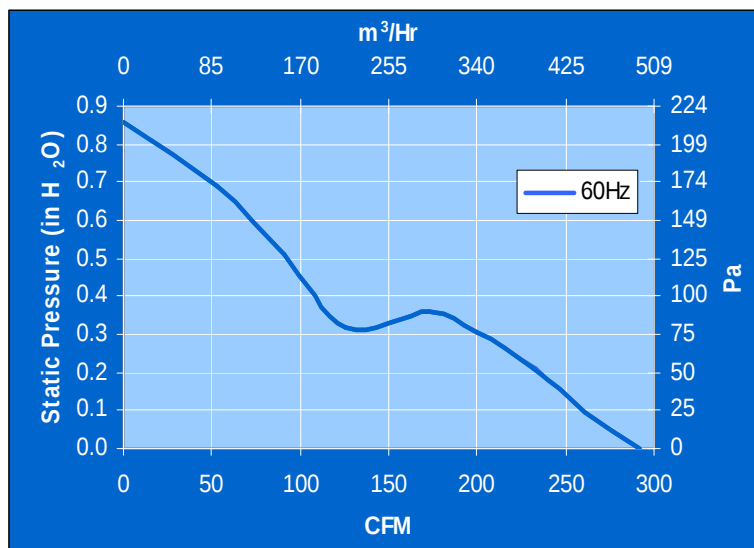

172 x 55mm

Model Number	Rated Voltage	Hertz	Running Current	Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VAC	Hz	Amps	Watts	RPM	CFM	m³/Hr	In H ₂ O	Pa	DbA
FA2B3	115	60	0.36	41.4	3400	300	509	0.86	214	56.5
FA77B3	230	60	0.18	41.4	3400	300	509	0.86	214	56.5


Предлагаем продукцию COMAIR
ROTRON и другие (радиодетали)
Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by



Tarzan AC



MECHANICAL DRAWING

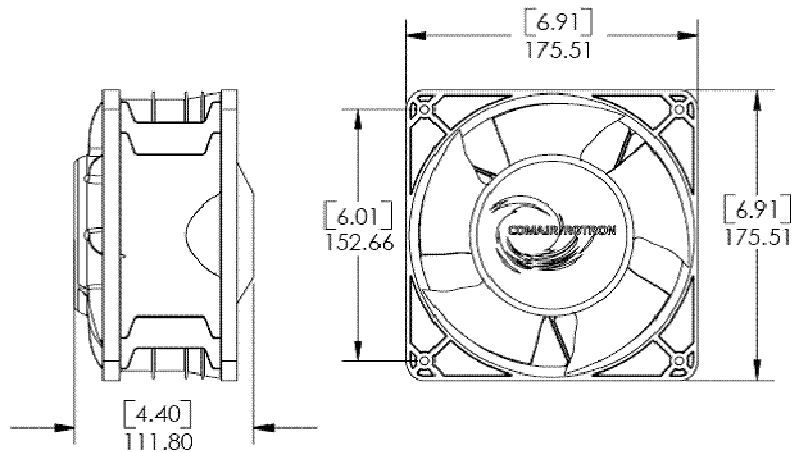

176 x 112 mm


STANDARD FEATURES

- Size: 176 x 112 mm deep (6.91" x 4.4")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 2.26 Kg (5 lbs.)
- Ball Bearings
- Impeller: Polypropylene
- Venturi: Phenolic
- 12" Lead Wires
- Available in 50/60 Hz

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

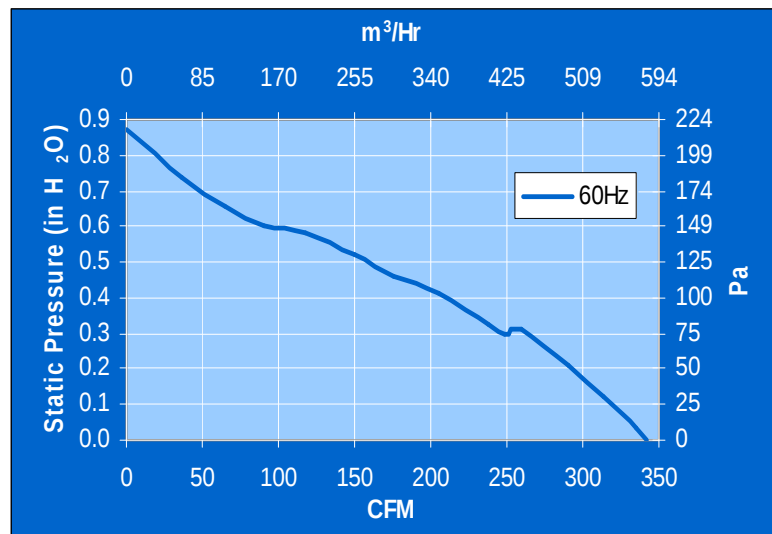

Model Number	Rated Voltage	Hertz	Running Current	Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VAC					CFM	m³/Hr	In H ₂ O	Pa	
TNE2	115	60	0.49	59	3350	340	577	0.87	217	65.4
TNE3	230	60	0.25	59	3350	340	577	0.87	217	65.4

Предлагаем продукцию COMAIR
ROTRON и другие (радиодетали)
Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Caravel AC



MECHANICAL DRAWING

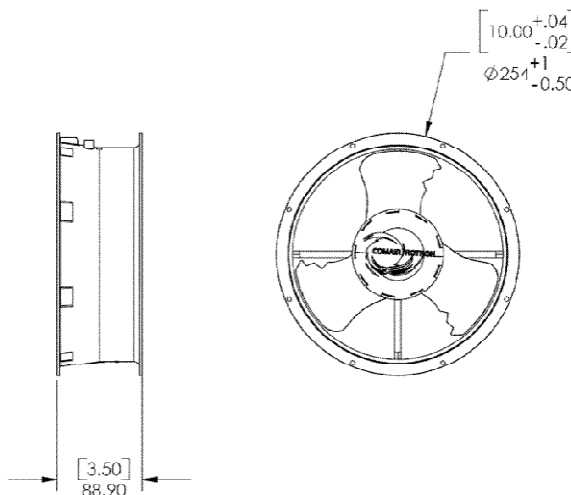


STANDARD FEATURES

- Size: 254 x 88.9mm deep (10" x 3.5")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 2 Kg (4.4 lbs.)
- Dual Ball Bearings
- Impeller: Polycarbonate
- Venturi: Metal Alloy
- 12" Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

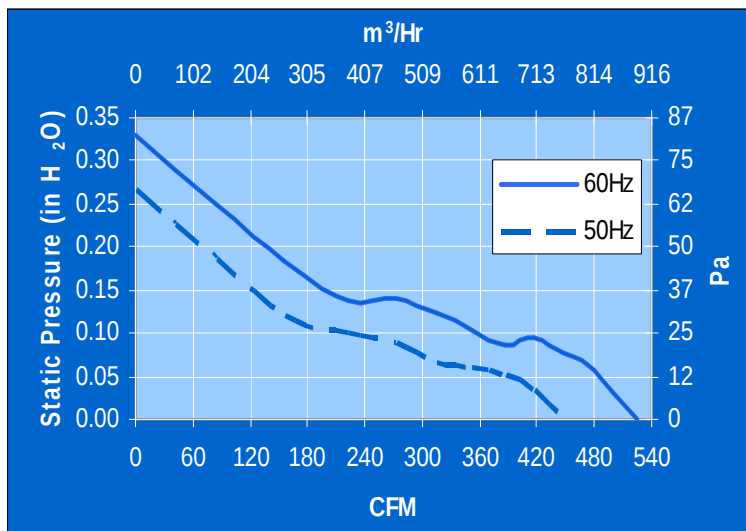

254 x 89mm

Model Number	Rated Voltage	Hertz	Running Current	Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VAC	Hz	Amps	Watts	RPM	CFM	m³/Hr	In H ₂ O	Pa	DbA
CLE2L2	115	60	0.50	61	1650	550	934	0.375	93	49.2
CLE3L2	220	60	0.25	60	1650	550	934	0.375	93	49.2

Предлагаем продукцию COMAIR
 ROTRON и другие (радиодетали)
 Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

Caravel XL AC



MECHANICAL DRAWING

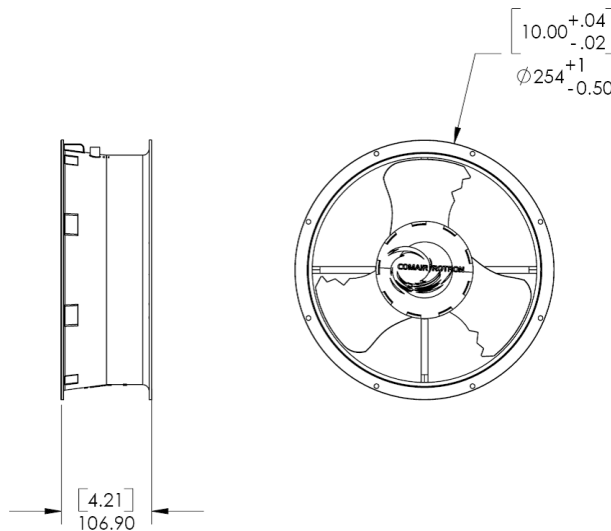


STANDARD FEATURES

- Size: 254 x 106.9mm deep (10" x 4.2")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 2.1 Kg (4.6 lbs.)
- Dual Ball Bearings
- Impeller: Polycarbonate
- Venturi: Metal Alloy
- 12" Lead Wires

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

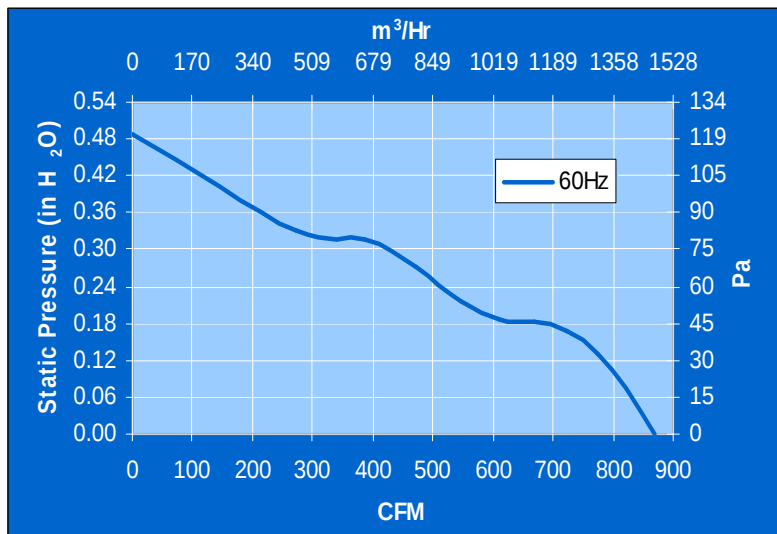

254 x 107mm

Model Number	Rated Voltage	Hertz	Running Current	Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VAC					CFM	m³/Hr	In H ₂ O	Pa	
CLE2L5	115	60	1.3	115	2400	825	1401	0.41	101	60
CLE3L5	230	60	0.6	110	2400	825	1401	0.41	101	60

Предлагаем продукцию COMAIR
ROTRON и другие (радиодетали)
Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




approvals pending

5.25" Diplomat AC



MECHANICAL DRAWING

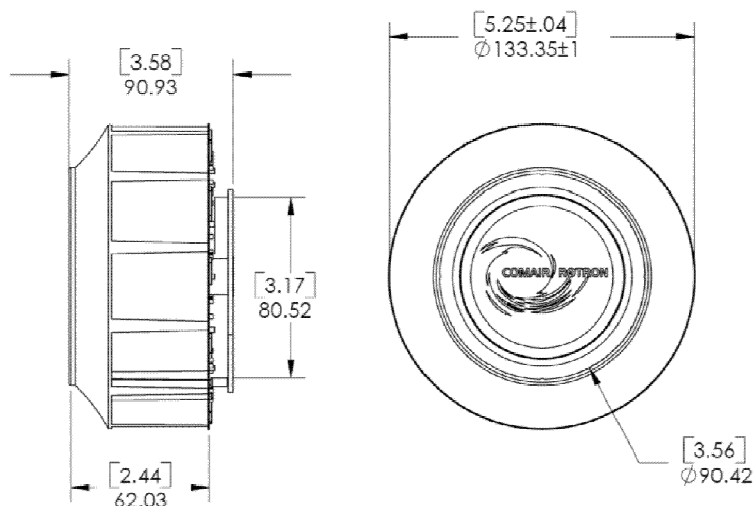


STANDARD FEATURES

- Size: 133.35x 90.93 mm deep (5.25" x 3.6")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 510 g (18 oz.)
- Sleeve Bearings
- Impeller: Polypropylene
- Venturi: Die Cast Aluminum
- 12" Lead Wires
- Available in 50/60 Hz

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

PERFORMANCE GRAPH

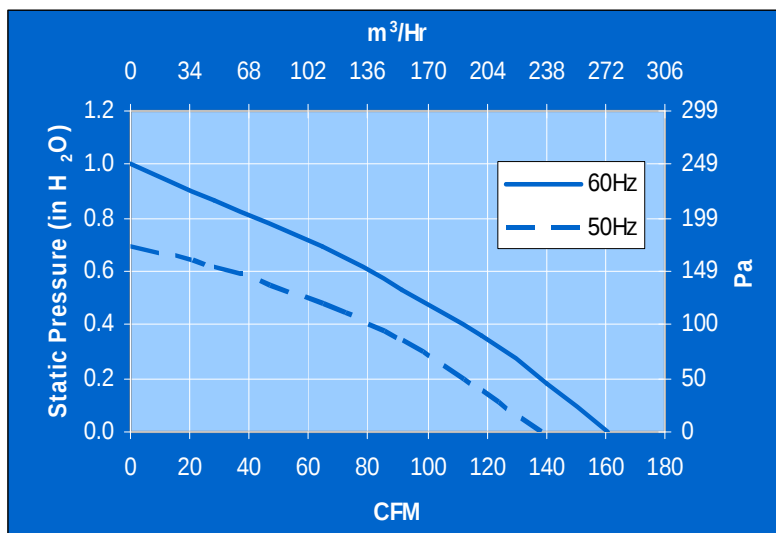

133 X 91 mm

Model Number	Rated Voltage	Hertz	Running Current	Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VAC	Hz	Amps	Watts	RPM	CFM	m ³ /Hr	In H ₂ O	Pa	DbA
DAF2B	115	60	0.26	31	3350	160	272	1.0	249	57.1
DAF77B	220/230	60	0.12	28	3350	160	272	1.0	249	57.1


Предлагаем продукцию COMAIR
 ROTRON и другие (радиодетали)
 Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by




Biscuit AC



MECHANICAL DRAWING

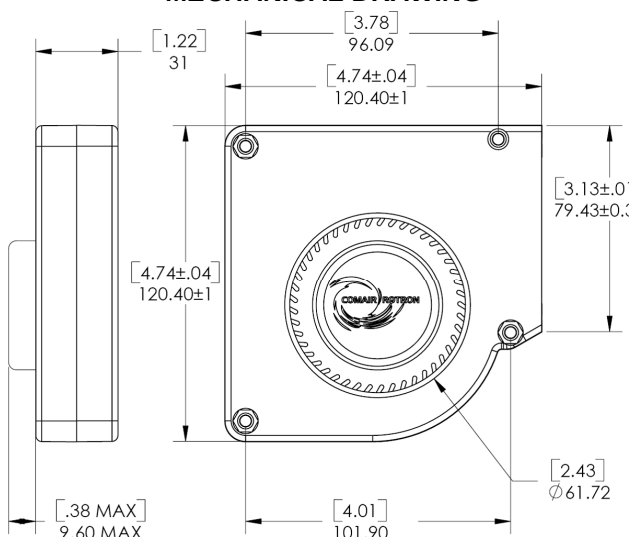

PERFORMANCE GRAPH

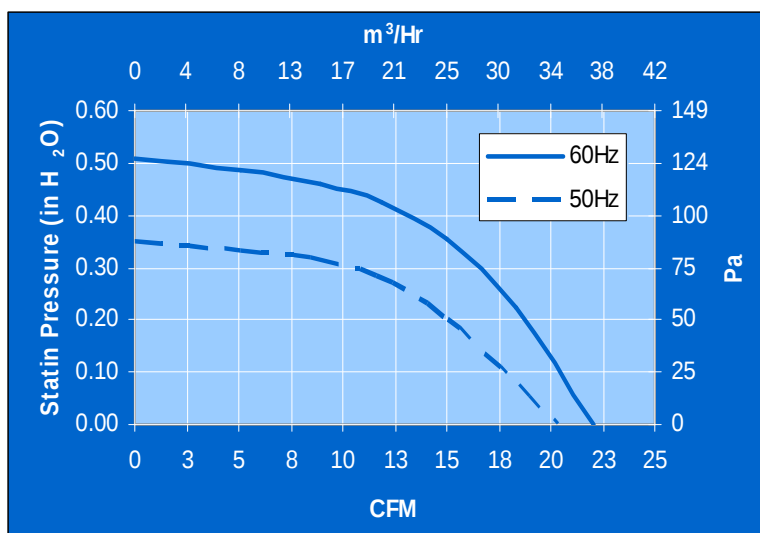

120 x 41 mm

STANDARD FEATURES

- Size: 120.4 x 40.6 mm deep (4.74" x 1.6")
- Operating Temperature: -10°C to +70°C
- Storage Temperature: -40°C to +85°C
- Weight: 510 g (18 oz.)
- Sleeve Bearings
- Impeller: Polypropylene
- Venturi: Polycarbonate
- 12" Lead Wires
- Available in 50/60 Hz

BENEFITS

- Outstanding CFM Performance in High Pressure Systems
- Dependability with an 18 Month Warranty
- Extended Bearing Life
- Designed with optional performance features

Model Number	Rated Voltage	Hertz	Running Current	Input Power	Speed	Rated Airflow		Rated Air Pressure		Noise
	VAC	Hz	Amps	Watts	RPM	CFM	m ³ /Hr	In H ₂ O	Pa	DbA
BT2A	115	60	0.17	16	2700	22	37	0.5	126	49.6
BT3A	220/230	60	0.08	14	2700	22	37	0.5	126	49.6

Предлагаем продукцию COMAIR
ROTRON и другие (радиодетали)
Беларусь г.Минск 8(017)200-56-46
www.fotorele.net e:mail minsk17@tut.by



approvals pending