

CHIP TYPE**CS**

Series

Surface Mounted Device

JAMICON®**Features**


- Height : 5.4mm.
- Load life : 85°C 2000 hours.

**SPECIFICATION**

Item	Characteristic							
Operation Temperature Range	-40 ~ +85°C							
Rated Working Voltage	4 ~ 50VDC							
Capacitance Tolerance (120Hz 20°C)	±20%(M)							
Leakage Current (20°C)	$I \leq 0.01CV$ or $3 (\mu A)$						I : Leakage Current (μA)	
	*Whichever is greater after 2 minutes						C : Rated Capacitance (μF)	
Surge Voltage (20°C)	W.V.	4	6.3	10	16	25	35	50
	S.V.	5	8	13	20	32	44	63
Dissipation Factor (tan δ) (120Hz 20°C)	W.V.	4	6.3	10	16	25	35	50
	$\tan \delta$	0.35	0.26	0.20	0.16	0.14	0.12	0.12
Low Temperature Stability	Impedance ratio at 120Hz							
	Rated Voltage (V)		4	6.3	10	16	25	35 ~ 50
	-25°C / +20°C		7	4	3	2	2	2
	-40°C / +20°C		15	8	6	4	4	3
Load Life	After 2000 hours application of W.V. and +85°C ripple current value, the capacitor shall meet the following limits. (DC + ripple peak voltage \leq rate working voltage)							
	Capacitance Change	$\leq \pm 20\%$ of initial value						
	Dissipation Factor	$\leq 200\%$ of initial specified value						
	Leakage current	\leq initial specified value						
Shelf Life		At +85°C, no voltage application after 1000 hours, the capacitor shall meet the limits for load life characteristics. (With voltage treatment)						
Resistance to Soldering Heat		Capacitors placed on a 250°C hot plate for 30 seconds with their electrode terminals facing downward will fulfill the following conditions after being cooled to room temperature.						
		Capacitance Change	$\leq \pm 10\%$ of initial value					
		Dissipation Factor	\leq initial specified value					
		Leakage current	\leq initial specified value					

DIMENSIONS (mm)

D	L	A	H	I	W	P	K
4.0	5.4	4.3	5.5MAX	1.8	0.65 ± 0.1	1.0	$0.35^{+0.15}_{-0.20}$
5.0	5.4	5.3	6.5MAX	2.2	0.65 ± 0.1	1.5	$0.35^{+0.15}_{-0.20}$
6.3	5.4	6.6	7.8MAX	2.6	0.65 ± 0.1	2.1	$0.35^{+0.15}_{-0.20}$

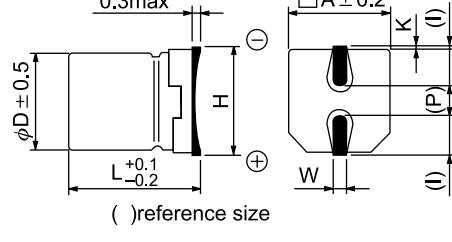



Series

JAMICON®

CASE SIZE & MAX RIPPLE CURRENT

Case size : D x L
Max ripple current : mA(rms)

(mm)
85°C 120Hz

V(Code)	4 (0G)		6.3 (0J)		10 (1A)		16 (1C)		25 (1E)		35 (1V)		50 (1H)	
	μF	Item	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.
0.1	0R1												4x5.4	3
0.22	R22												4x5.4	4
0.33	R33												4x5.4	5
0.47	R47												4x5.4	6
1.0	010												4x5.4	9
2.2	2R2												4x5.4	13
3.3	3R3												4x5.4	16
4.7	4R7								4x5.4	17	4x5.4	19	5x5.4	21
10	100						4x5.4	24	5x5.4	29	5x5.4	31	6.3x5.4	36
22	220			4x5.4	27	5x5.4	36	5x5.4	40	6.3x5.4	49	6.3x5.4	55	
33	330	4x5.4	29	5x5.4	38	5x5.4	44	6.3x5.4	55	6.3x5.4	60			
47	470	4x5.4	35	5x5.4	46	6.3x5.4	60	6.3x5.4	65					
100	101	5x5.4	60	6.3x5.4	70	6.3x5.4	80	6.3x5.4	90					
220	221	6.3x5.4	80											