

Маркировка вентиляторов постоянного тока (DC)торговой марки QwikFlow
Ordering Guide: R D H 123 8 B



R:
Request

D:
D - DCFan -----вентилятор постоянного тока
B - DC Blower воздуходувка постоянного тока

DC Fan Motor Speed: скорость вентилятора постоянного тока
H - High Speed высокая скорость
M - Medium Speed средняя скорость
L - Low Speed низкая скорость

Fan or DC Fan Blowers Frame Size: размер рамки
1238 - 120mm x 12mm x 38mm


DC Fan Bearing Type: тип подшипника
B - Ball Bearing качения
S - Sleeve Bearing скольжения (втулка)

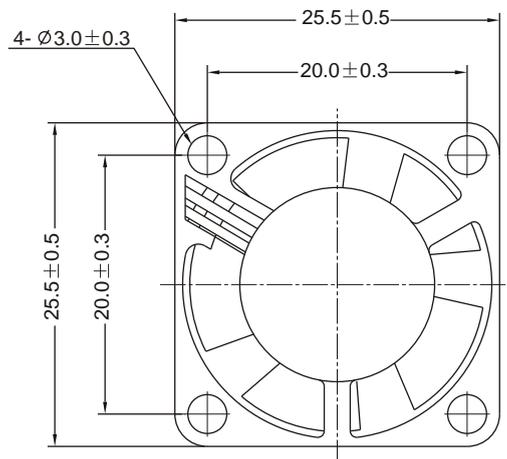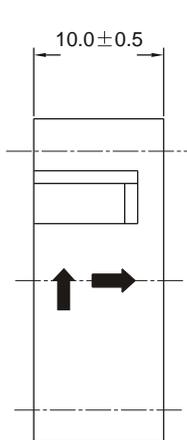


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH2510S5	Sleeve	N	5	3.5	0.16	13000	2.67	0.076	4.28	27.95	•	•			•	7	600	5.0
RDM2510S5				3.5	0.12	10000	2.06	0.058	3.63	23.18	•	•			•			
RDL2510S5				3.5	0.08	8000	1.65	0.047	2.03	20.36	•	•			•			
RDH2510B5	Ball			3.5	0.16	13000	2.67	0.076	4.28	27.95	•	•			•			
RDM2510B5				3.5	0.12	10000	2.06	0.058	3.63	23.18	•	•			•			
RDL2510B5				3.5	0.08	8000	1.65	0.047	2.03	20.36	•	•			•			
RDH2510S	Sleeve	N	12	6.0	0.10	13000	2.67	0.076	4.28	27.95	•	•			•	7	600	5.0
RDM2510S				6.0	0.08	10000	2.06	0.058	3.63	23.18	•	•			•			
RDL2510S				6.0	0.06	8000	1.65	0.047	2.03	20.36	•	•			•			
RDH2510B	Ball			6.0	0.10	13000	2.67	0.076	4.28	27.95	•	•			•			
RDM2510B				6.0	0.08	10000	2.06	0.058	3.63	23.18	•	•			•			
RDL2510B				6.0	0.06	8000	1.65	0.047	2.03	20.36	•	•			•			

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV
5V	•	•	•	•
12V	•	•	•	•

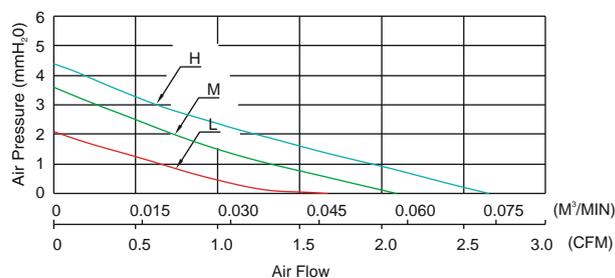


30x30x10mm

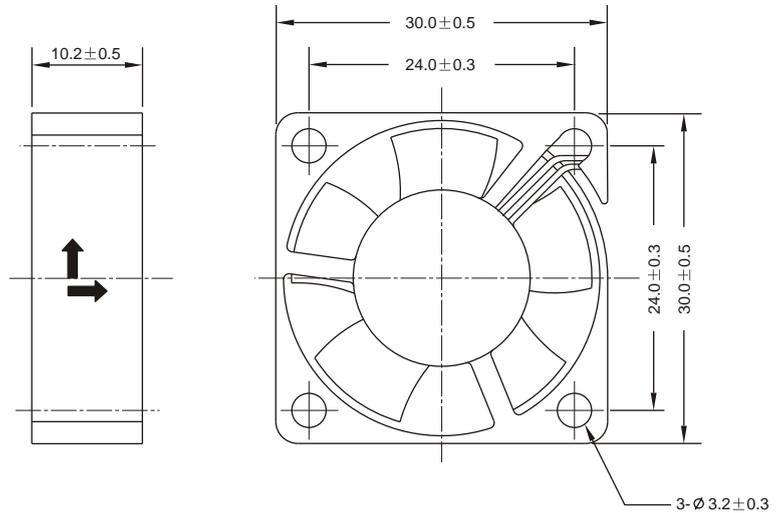


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH3010S5	Sleeve	B	5	3.5	0.20	11000	4.47	0.135	4.46	30.05	•	•			•	8.5	600	5.9
RDM3010S5				3.5	0.14	9000	3.43	0.097	2.70	24.10	•	•			•			
RDL3010S5				3.5	0.12	7000	2.63	0.069	1.71	21.24	•	•			•			
RDH3010B5	Ball			3.5	0.20	11000	4.47	0.134	4.46	30.05	•	•			•			
RDM3010B5				3.5	0.14	9000	3.34	0.097	2.70	24.10	•	•			•			
RDL3010B5				3.5	0.12	7000	2.63	0.069	1.71	21.24	•	•			•			
RDH3010S	Sleeve	12	12	6.0	0.10	11000	4.47	0.135	4.46	30.05	•	•			•			
RDM3010S				6.0	0.09	9000	3.43	0.097	2.70	24.10	•	•			•			
RDL3010S				6.0	0.06	7000	2.63	0.069	1.71	21.24	•	•			•			
RDH3010B	Ball			6.0	0.10	11000	4.47	0.135	4.46	30.05	•	•			•			
RDM3010B				6.0	0.09	9000	3.43	0.097	2.70	24.10	•	•			•			
RDL3010B				6.0	0.06	7000	2.63	0.689	1.71	21.24	•	•			•			

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV
5V	•	•	•	•
12V	•	•	•	•

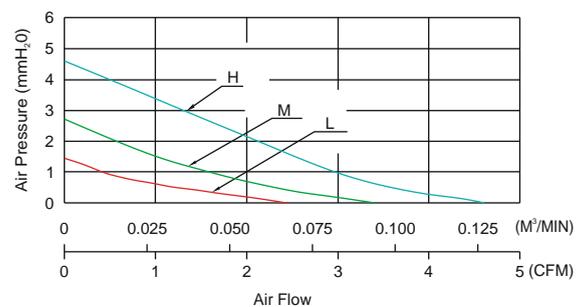


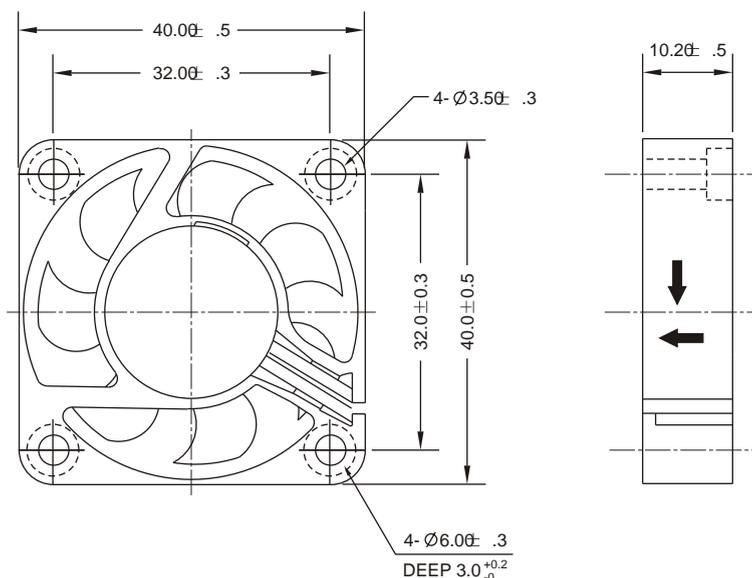


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH4010S5	Sleeve	N	5	3.5	0.20	7000	7.67	0.217	3.77	30.30	•	•		•	•	16	600	11.8
RDM4010S5				3.5	0.16	6000	6.45	0.182	2.83	26.57	•	•		•	•			
RDL4010S5				3.5	0.13	5000	5.29	0.149	2.04	22.69	•	•		•	•			
RDH4010B5	Ball			3.5	0.20	7000	7.67	0.217	3.77	30.30	•	•		•	•			
RDM4010B5				3.5	0.16	6000	6.45	0.182	2.83	26.57	•	•		•	•			
RDL4010B5				3.5	0.13	5000	5.29	0.149	2.04	22.69	•	•		•	•			
RDH4010S	Sleeve	N	12	6.0	0.09	7000	7.67	0.217	3.77	30.30	•	•		•	•	16	600	11.8
RDM4010S				6.0	0.07	6000	6.45	0.182	2.83	26.57	•	•		•	•			
RDL4010S				7.0	0.06	5000	5.29	0.149	2.04	22.69	•	•		•	•			
RDH4010B	Ball			6.0	0.07	7000	7.67	0.217	3.77	30.30	•	•		•	•			
RDM4010B				6.0	0.06	6000	6.45	0.182	2.83	26.57	•	•		•	•			
RDL4010B				7.0	0.05	5000	5.29	0.149	2.04	22.69	•	•		•	•			

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	CSA
5V	•	•	•	•	
12V	•	•	•	•	•

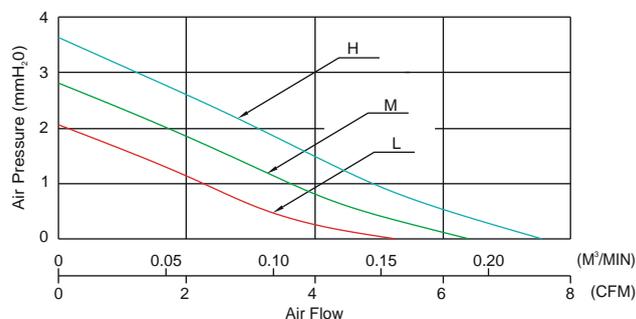


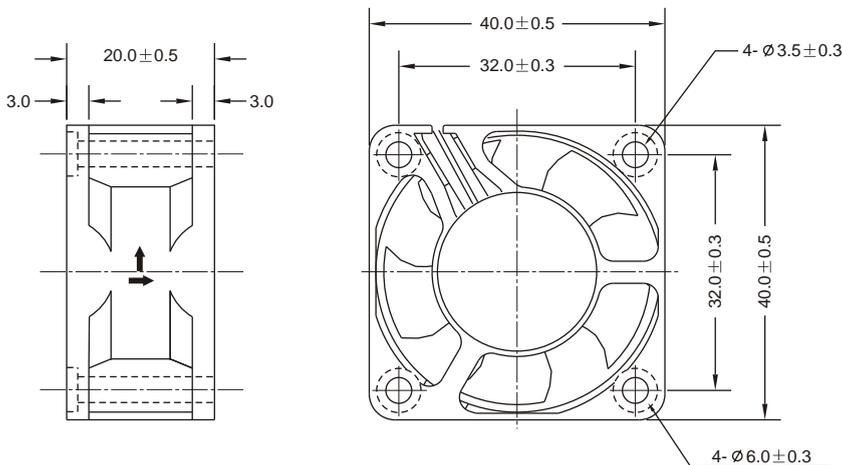


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH4020S5	Sleeve	N	5	3.5	0.40	8000	9.11	0.258	6.90	31.40	•	•	•	•	•	29	400	13.1
RDH4020S5				3.5	0.28	7500	8.59	0.243	6.18	29.62	•	•	•	•	•			
RDM4020S5				3.5	0.25	6200	6.99	0.197	4.29	25.15	•	•	•	•	•			
RDL4020S5				3.5	0.20	5000	5.53	0.156	2.74	21.23	•	•	•	•	•			
RDH4020B5	Ball			3.5	0.40	8000	9.11	0.258	6.90	31.40	•	•	•	•	•			
RDH4020B5				3.5	0.28	7500	8.59	0.243	6.18	29.62	•	•	•	•	•			
RDM4020B5				3.5	0.25	6200	6.99	0.197	4.29	25.15	•	•	•	•	•			
RDL4020B5				3.5	0.20	5000	5.53	0.156	2.74	21.23	•	•	•	•	•			
RDH4020S	Sleeve	12	6.0	0.12	8000	9.11	0.258	6.90	31.40	•	•	•	•	•				
RDH4020S			6.0	0.12	7500	8.59	0.243	6.18	29.62	•	•	•	•	•				
RDM4020S			6.0	0.10	6200	6.99	0.197	4.29	25.15	•	•	•	•	•				
RDL4020S			6.0	0.06	5000	5.53	0.156	2.74	21.23	•	•	•	•	•				
RDH4020B	Ball		6.0	0.12	8000	9.11	0.258	6.90	31.40	•	•	•	•	•				
RDH4020B			6.0	0.12	7500	8.59	0.243	6.18	29.62	•	•	•	•	•				
RDM4020B			6.0	0.10	6200	6.99	0.197	4.29	25.15	•	•	•	•	•				
RDL4020B			6.0	0.06	5000	5.53	0.156	2.74	21.23	•	•	•	•	•				
RDH4020S2	Sleeve		24	12.0	0.07	8000	9.11	0.258	6.90	31.40	•	•	•	•	•			
RDH4020S2				12.0	0.06	7500	8.59	0.243	6.18	29.62	•	•	•	•	•			
RDM4020S2				12.0	0.05	6200	6.99	0.197	4.29	25.15	•	•	•	•	•			
RDL4020S2				12.0	0.04	5000	5.53	0.156	2.74	21.23	•	•	•	•	•			
RDH4020B2	Ball	12.0		0.07	8000	9.11	0.258	6.90	31.40	•	•	•	•	•				
RDH4020B2		12.0		0.06	7500	8.59	0.243	6.18	29.62	•	•	•	•	•				
RDM4020B2		12.0		0.05	6200	6.99	0.197	4.29	25.15	•	•	•	•	•				
RDL4020B2		12.0		0.04	5000	5.53	0.156	2.74	21.23	•	•	•	•	•				

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	CSA
5V	•	•	•	•	
12V	•	•	•	•	•
24V					

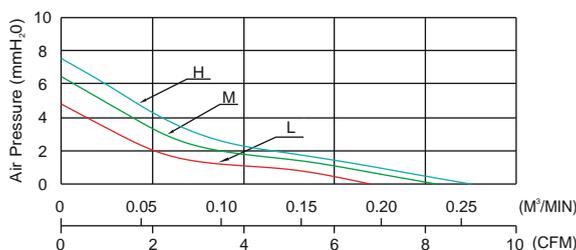


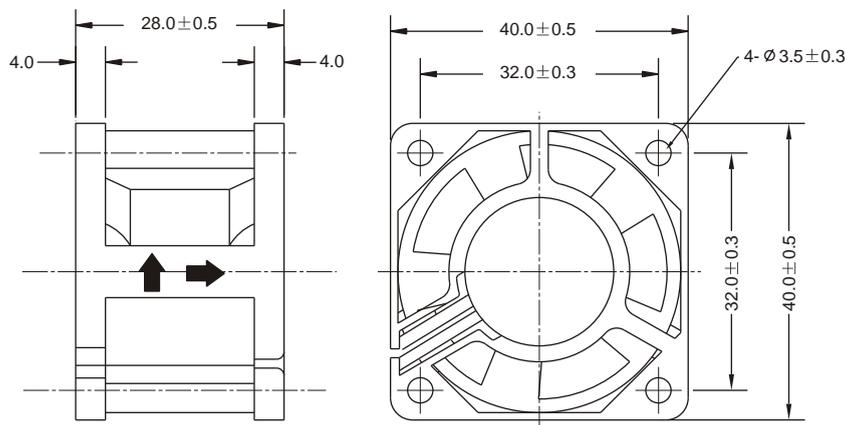


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBa	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH4028S5	Sleeve	B	5	3.5	0.35	7500	9.42	0.266	6.05	27.43	•	•	•	•	•	36	400	15.4
RDM4028S5				3.5	0.30	6500	8.26	0.233	4.71	24.33	•	•	•	•	•			
RDL4028S5				3.5	0.22	5000	6.12	0.173	3.50	20.30	•	•	•	•	•			
RDH4028B5	Ball			3.5	0.35	7500	9.42	0.266	6.05	27.43	•	•	•	•	•			
RDM4028B5				3.5	0.30	6500	8.26	0.233	4.71	24.33	•	•	•	•	•			
RDL4028B5				3.5	0.22	5000	6.12	0.173	3.50	20.30	•	•	•	•	•			
RDH4028S	Sleeve	12	6.0	0.20	8800	11.25	0.318	8.19	31.44	•	•	•	•	•				
RDM4028S			6.0	0.18	8000	10.14	0.287	6.87	29.09	•	•	•	•	•				
RDL4028S			6.0	0.12	5000	6.12	0.177	3.50	20.30	•	•	•	•	•				
RDH4028B	Ball		6.0	0.20	8800	11.25	0.318	8.19	31.44	•	•	•	•	•				
RDM4028B			6.0	0.18	8000	10.14	0.287	6.87	29.09	•	•	•	•	•				
RDL4028B			6.0	0.12	5000	6.12	0.177	3.50	20.30	•	•	•	•	•				
RDH4028S2	Sleeve	24	12.0	0.16	8800	11.25	0.318	8.19	31.44	•	•	•	•	•				
RDM4028S2			12.0	0.12	8000	10.14	0.287	6.87	29.09	•	•	•	•	•				
RDL4028S2			12.0	0.09	5000	6.12	0.173	3.50	20.30	•	•	•	•	•				
RDH4028B2	Ball		12.0	0.16	8800	11.25	0.318	8.19	31.44	•	•	•	•	•				
RDM4028B2			12.0	0.12	8000	10.14	0.287	6.87	29.09	•	•	•	•	•				
RDL4028B2			12.0	0.09	5000	6.12	0.173	3.50	20.30	•	•	•	•	•				

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV
5V	•	•	•	•
12V	•	•	•	•
24V	•	•	•	•

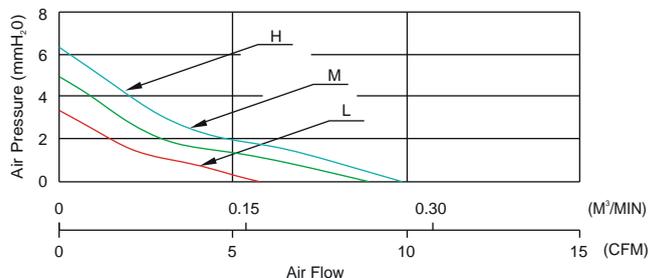


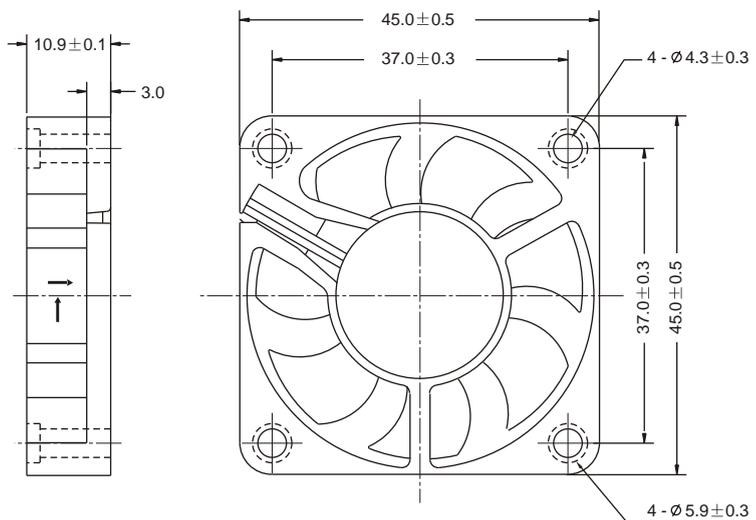


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing									
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs								
RDH4510S5	Sleeve	E	5	3.5	0.21	6000	8.30	0.235	3.60	30.04	•	•		•	•	15	600	11.8								
RDM4510S5											•	•		•	•											
RDL4510S5											•	•		•	•											
RDH4510B5	Ball										5	3.5	0.16	5000	6.86				0.194	2.54	25.71	•	•		•	•
RDM4510B5																						•	•		•	•
RDL4510B5																						•	•		•	•
RDH4510S	Sleeve	12	6.0	0.10	6000	8.30	0.235	3.60	30.04	•						•		•				•				
RDM4510S										•						•		•				•				
RDL4510S										•						•		•				•				
RDH4510B	Ball									12	6.0	0.10	6000	8.30	0.235	3.60	30.04	•	•		•	•				
RDM4510B																		•	•		•	•				
RDL4510B																		•	•		•	•				

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV
5V	•	•	•	•
12V	•	•	•	•

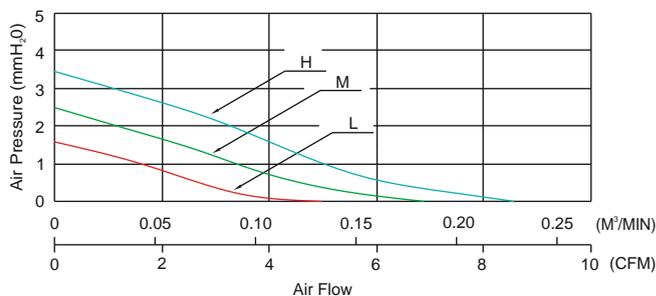


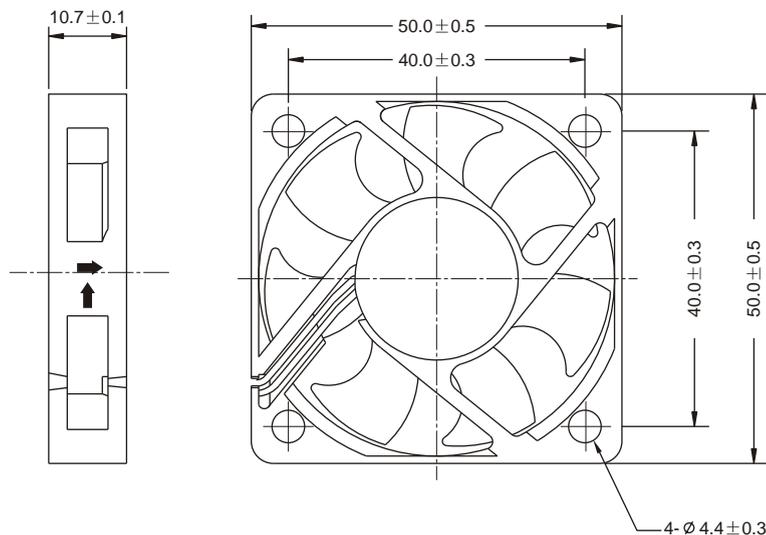


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBa	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH5010S5	Sleeve	H	5	3.5	0.30	5300	13.27	0.375	3.38	28.16	•	•		•	•	19	600	12.9
RDM5010S5				3.5	0.20	4500	11.02	0.312	2.53	24.06	•	•		•	•			
RDL5010S5				3.5	0.14	3500	8.69	0.246	1.67	20.32	•	•		•	•			
RDH5010B5	Ball			3.5	0.30	5300	7.76	0.217	3.77	30.30	•	•		•	•			
RDM5010B5				3.5	0.20	4500	6.45	0.182	2.83	26.57	•	•		•	•			
RDL5010B5				3.5	0.14	3500	5.29	0.149	2.04	22.69	•	•		•	•			
RDH5010S	Sleeve	H	12	6.0	0.16	5300	13.27	0.375	3.38	28.16	•	•		•	•	19	600	12.9
RDM5010S				6.0	0.08	4500	11.02	0.312	2.53	24.06	•	•		•	•			
RDL5010S				7.0	0.07	3500	8.69	0.246	1.67	20.32	•	•		•	•			
RDH5010B	Ball			6.0	0.13	5300	7.67	0.217	3.77	30.30	•	•		•	•			
RDM5010B				6.0	0.07	4500	6.45	0.182	2.83	26.57	•	•		•	•			
RDL5010B				7.0	0.06	3500	5.29	0.149	2.04	22.69	•	•		•	•			

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	CSA
5V	•	•	•	•	
12V	•	•	•	•	•

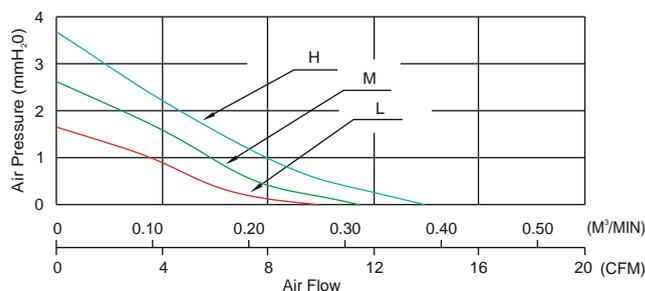


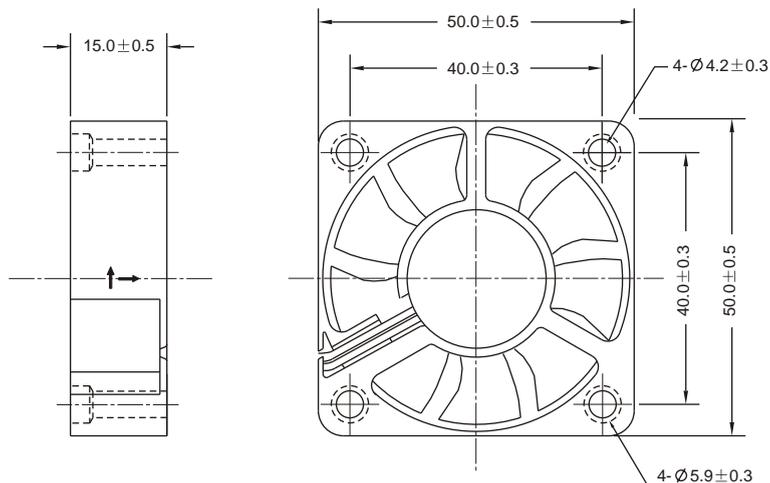


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBa	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH5015S5	Sleeve	B	5	3.5	0.33	5500	10.82	0.306	3.60	30.75	•	•		•	•	31	200	7.5
RDM5015S5				3.5	0.25	5000	9.79	0.277	3.02	28.21	•	•		•	•			
RDL5015S5				3.5	0.20	4500	8.92	0.253	2.56	25.95	•	•		•	•			
RDH5015B5	Ball			3.5	0.33	5500	10.82	0.306	3.60	30.75	•	•		•	•			
RDM5015B5				3.5	0.25	5000	9.79	0.277	3.02	28.21	•	•		•	•			
RDL5015B5				3.5	0.20	4500	8.92	0.253	2.56	25.95	•	•		•	•			
RDH5015S	Sleeve	12	6.0	0.16	5500	10.82	0.306	3.60	30.75	•	•		•	•				
RDM5015S				0.14	5000	9.79	0.277	3.02	28.21	•	•		•	•				
RDL5015S				0.12	4500	8.92	0.253	2.56	25.95	•	•		•	•				
RDH5015B	Ball			0.16	5500	10.82	0.306	3.60	30.75	•	•		•	•				
RDM5015B				0.14	5000	9.79	0.277	3.02	28.21	•	•		•	•				
RDL5015B				0.12	4500	8.92	0.253	2.56	25.95	•	•		•	•				

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV
5V				
12V	•	•	•	•

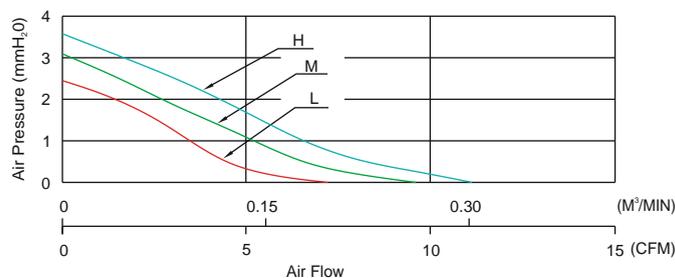


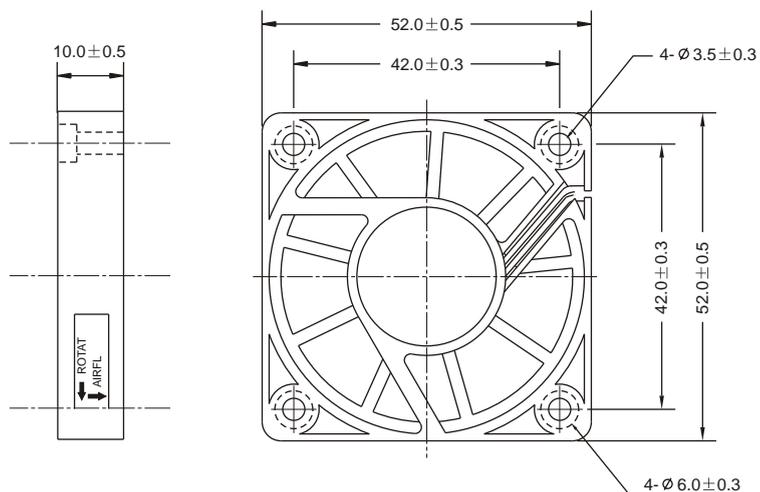


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH5210S	Sleeve	B	12	6.0	0.14	6000	12.68	0.359	3.48	35.24	•	•		•	•	22	600	14.7
RDM5210S				6.0	0.12	5000	10.48	0.296	2.51	30.52	•	•		•	•			
RDL5210S				6.0	0.09	4000	8.23	0.233	1.66	25.01	•	•		•	•			
RDH5210B	Ball			6.0	0.14	6000	12.68	0.359	3.48	25.24	•	•		•	•			
RDM5210B				6.0	0.12	5000	10.48	0.296	2.51	30.52	•	•		•	•			
RDL5210B				6.0	0.09	4000	8.23	0.233	1.66	25.01	•	•		•	•			

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	CSA
12V	•	•	•	•	•

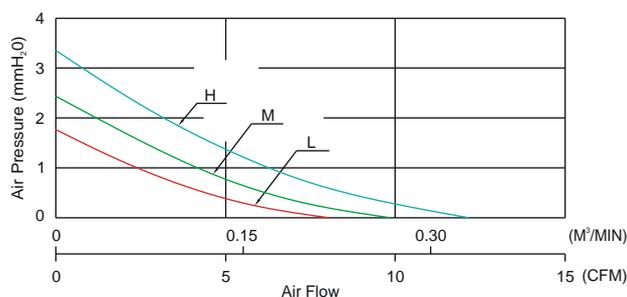


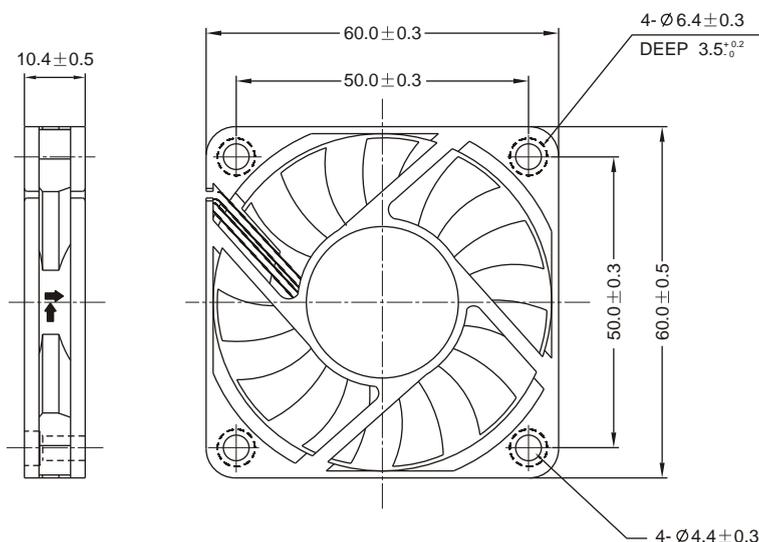


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBa	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH6010S5	Sleeve	H	5	3.5	0.35	4200	18.50	0.523	3.28	31.41	•	•		•	•	23	300	8.7
RDM6010S5				3.5	0.22	3600	15.94	0.451	2.53	27.69	•	•		•	•			
RDL6010S5				3.5	0.17	3000	13.22	0.374	1.84	23.83	•	•		•	•			
RDH6010B5	Ball			3.5	0.35	4200	18.50	0.523	3.28	31.41	•	•		•	•			
RDM6010B5				3.5	0.22	3600	15.94	0.451	2.53	27.69	•	•		•	•			
RDL6010B5				3.5	0.17	3000	13.22	0.374	1.84	23.83	•	•		•	•			
RDH6010S	Sleeve		12	6.0	0.22	4200	18.50	0.523	3.28	31.41	•	•		•	•			
RDM6010S				6.0	0.17	3600	15.94	0.451	2.53	27.69	•	•		•	•			
RDL6010S				6.0	0.14	3000	13.22	0.374	1.84	23.83	•	•		•	•			
RDH6010B	Ball			6.0	0.22	4200	18.50	0.523	3.28	31.41	•	•		•	•			
RDM6010B				6.0	0.17	3600	15.94	0.451	2.53	27.69	•	•		•	•			
RDL6010B				6.0	0.14	3000	13.22	0.374	1.84	23.83	•	•		•	•			
RDH6010S2	Sleeve	24	12.0	0.11	4200	18.50	0.523	3.28	31.41	•	•		•	•				
RDM6010S2			12.0	0.09	3600	15.94	0.451	2.53	27.69	•	•		•	•				
RDL6010S2			12.0	0.07	3000	13.22	0.374	1.84	23.83	•	•		•	•				
RDH6010B2	Ball		12.0	0.11	4200	18.50	0.523	3.28	31.41	•	•		•	•				
RDM6010B2			12.0	0.09	3600	15.94	0.451	2.53	27.69	•	•		•	•				
RDL6010B2			12.0	0.07	3000	13.22	0.374	1.84	23.83	•	•		•	•				

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV
5V				
12V	•	•	•	•
24V				

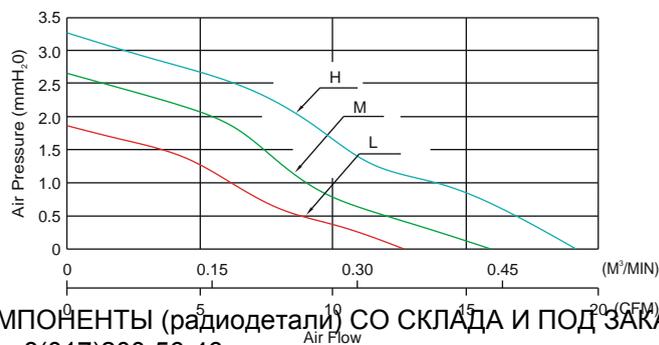



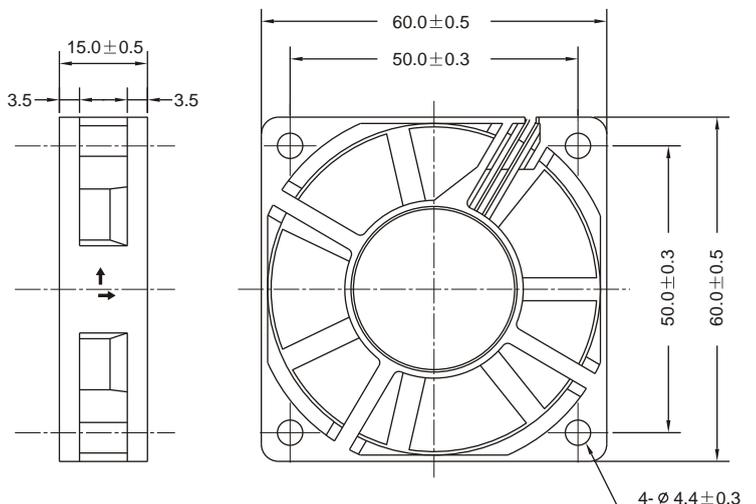


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBa	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH6015S5	Sleeve	H	5	3.5	0.40	4500	18.61	0.527	3.45	30.36	•	•		•	•	34	200	9.0
RDM6015S5				3.5	0.25	4000	16.45	0.465	2.81	26.95	•	•		•	•			
RDL6015S5				3.5	0.15	3500	14.43	0.408	2.23	24.61	•	•		•	•			
RDH6015B5	Ball			3.5	0.40	4500	18.61	0.527	3.45	30.36	•	•		•	•			
RDM6015B5				3.5	0.25	4000	16.45	0.465	2.81	26.95	•	•		•	•			
RDL6015B5				3.5	0.15	3500	14.43	0.408	2.23	24.61	•	•		•	•			
RDH6015S	Sleeve		12	6.0	0.17	4500	18.61	0.527	3.45	30.36	•	•		•	•			
RDM6015S				6.0	0.15	4000	16.45	0.465	2.81	26.95	•	•		•	•			
RDL6015S				6.0	0.11	3500	14.43	0.408	2.23	24.61	•	•		•	•			
RDH6015B	Ball			6.0	0.17	4500	18.61	0.527	3.45	30.36	•	•		•	•			
RDM6015B				6.0	0.15	4000	16.45	0.465	2.81	26.95	•	•		•	•			
RDL6015B				6.0	0.11	3500	14.43	0.408	2.23	24.61	•	•		•	•			
RDH6015S2	Sleeve	24	12.0	0.15	4500	18.61	0.527	3.45	30.36	•	•		•	•				
RDM6015S2			12.0	0.10	4000	16.45	0.465	2.81	26.95	•	•		•	•				
RDL6015S2			12.0	0.08	3500	14.43	0.408	2.23	24.61	•	•		•	•				
RDH6015B2	Ball		12.0	0.15	4500	18.61	0.527	3.45	30.36	•	•		•	•				
RDM6015B2			12.0	0.10	4000	16.45	0.465	2.81	26.95	•	•		•	•				
RDL6015B2			12.0	0.08	3500	14.43	0.408	2.23	24.61	•	•		•	•				

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	VDE
5V	•	•	•	•	
12V	•	•	•	•	
24V					•

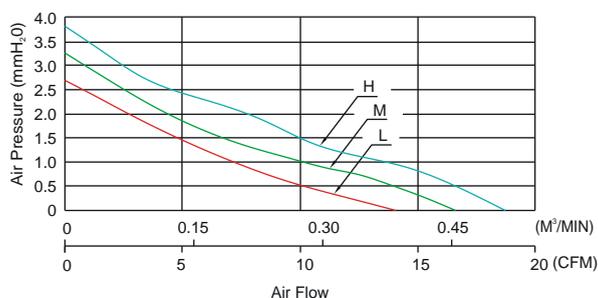


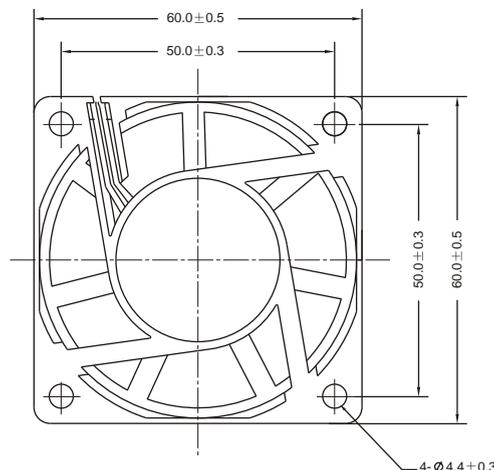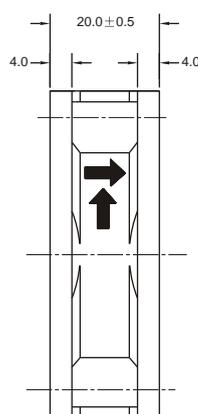


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBa	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH6020S	Sleeve	B	12	6.0	0.16	4000	16.08	0.455	3.92	26.88	•	•	•	•	•	50	200	11.5
RDM6020S				6.0	0.12	3300	13.28	0.376	2.74	23.30	•	•	•	•	•			
RDL6020S				6.0	0.08	2500	9.99	0.282	1.61	20.65	•	•	•	•	•			
RDH6020B	Ball			6.0	0.16	4000	16.08	0.455	3.92	26.88	•	•	•	•	•			
RDM6020B				6.0	0.12	3300	13.28	0.376	2.74	23.30	•	•	•	•	•			
RDL6020B				6.0	0.08	2500	9.99	0.282	1.61	20.65	•	•	•	•	•			
RDH6020S2	Sleeve	24	12.0	0.13	4000	16.08	0.455	3.92	26.88	•	•	•	•	•				
RDM6020S2				0.10	3300	13.28	0.376	2.74	23.30	•	•	•	•	•				
RDL6020S2				0.08	2500	9.99	0.282	1.61	20.65	•	•	•	•	•				
RDH6020B2	Ball			12.0	0.13	4000	16.08	0.455	3.92	26.88	•	•	•	•	•			
RDM6020B2				12.0	0.10	3300	13.28	0.376	2.74	23.30	•	•	•	•	•			
RDL6020B2				12.0	0.08	2500	9.99	0.282	1.61	20.65	•	•	•	•	•			

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	CSA	VDE
12V	•	•	•	•	•	
24V						•

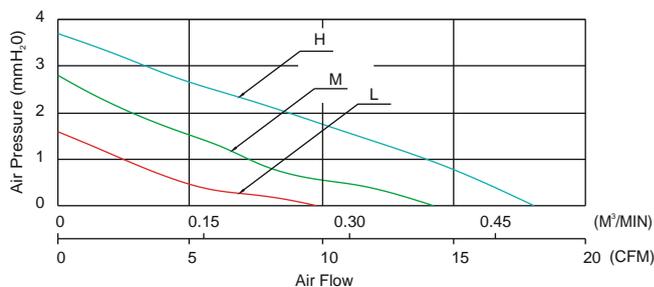


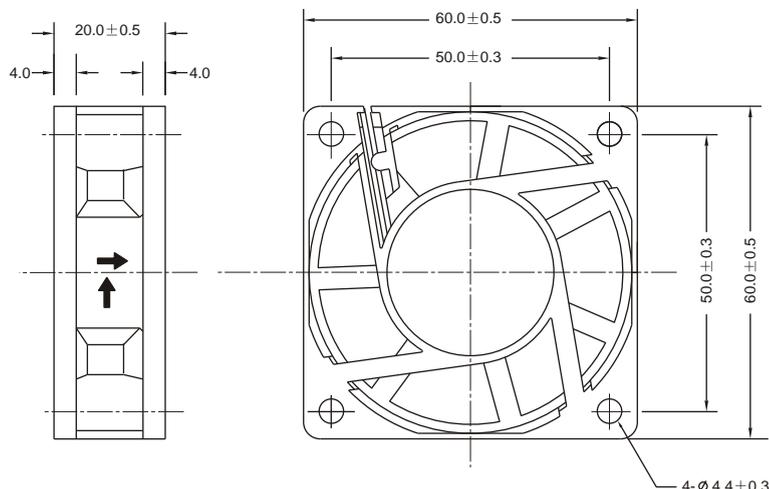


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dB(A)	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH6020S	Sleeve	H	12	6.0	0.16	4200	22.36	0.633	4.70	31.90	•	•	•	•	•	50	200	11.5
RDM6020S				6.0	0.12	3500	18.56	0.525	3.36	27.21	•	•	•	•	•			
RDL6020S				6.0	0.08	3000	15.75	0.446	2.47	24.12	•	•	•	•	•			
RDH6020B	Ball			6.0	0.16	4200	22.36	0.633	4.70	31.90	•	•	•	•	•			
RDM6020B				6.0	0.12	3500	18.56	0.525	3.36	27.21	•	•	•	•	•			
RDL6020B				6.0	0.08	3000	15.75	0.446	2.47	24.12	•	•	•	•	•			
RDH6020S2	Sleeve	24	12.0	0.13	4200	22.36	0.633	4.70	31.90	•	•	•	•	•				
RDM6020S2			12.0	0.10	3500	18.56	0.525	3.36	27.21	•	•	•	•	•				
RDL6020S2			12.0	0.08	3000	15.75	0.446	2.47	24.12	•	•	•	•	•				
RDH6020B2	Ball		12.0	0.13	4200	22.36	0.633	4.70	31.90	•	•	•	•	•				
RDM6020B2			12.0	0.10	3500	18.56	0.525	3.36	27.21	•	•	•	•	•				
RDL6020B2			12.0	0.08	3000	15.75	0.446	2.47	24.12	•	•	•	•	•				

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	CSA	VDE
12V	•	•	•	•	•	
24V						•

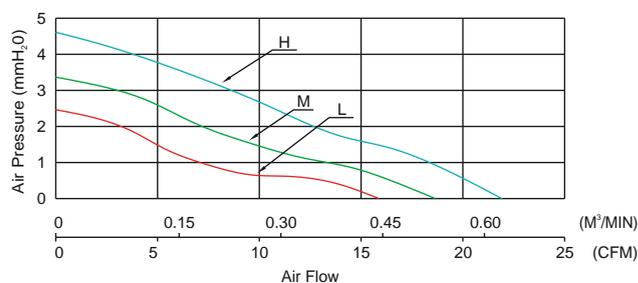


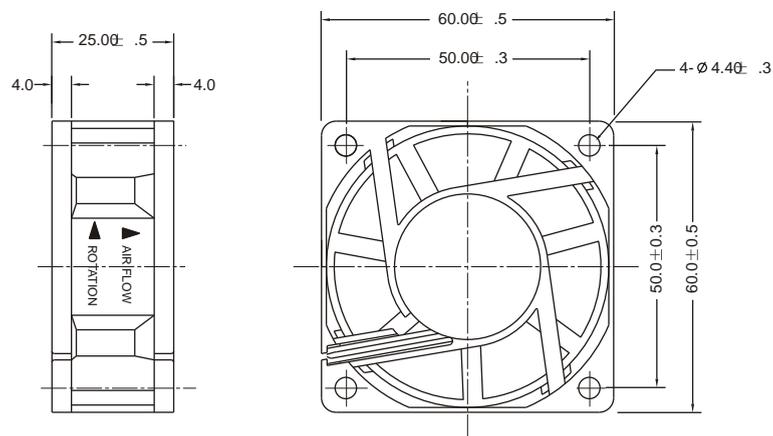


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH6025S	Sleeve	B	12	6.0	0.14	4000	19.25	0.545	4.21	27.20	•	•	•	•	•	62	100	7.2
RDM6025S				6.0	0.10	3000	14.10	0.399	2.42	22.71	•	•	•	•	•			
RDL6025S				6.0	0.07	2500	11.83	0.335	1.74	20.16	•	•	•	•	•			
RDH6025B	Ball			6.0	0.14	4000	19.25	0.545	4.21	27.20	•	•	•	•	•			
RDM6025B				6.0	0.10	3000	14.10	0.399	2.42	22.71	•	•	•	•	•			
RDL6025B				6.0	0.07	2500	11.83	0.335	1.74	20.16	•	•	•	•	•			
RDH6025S2	Sleeve	24	12.0	0.14	4000	19.25	0.545	4.21	27.20	•	•	•	•	•				
RDM6025S2			12.0	0.10	3000	14.10	0.399	2.42	22.71	•	•	•	•	•				
RDL6025S2			12.0	0.09	2500	11.83	0.335	1.74	20.16	•	•	•	•	•				
RDH6025B2	Ball		12.0	0.14	4000	19.25	0.545	4.21	27.20	•	•	•	•	•				
RDM6025B2			12.0	0.10	3000	14.10	0.399	2.42	22.71	•	•	•	•	•				
RDL6025B2			12.0	0.09	2500	11.83	0.335	1.74	20.16	•	•	•	•	•				

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	CSA	VDE
12V	•	•	•	•	•	
24V	•	•	•	•		•

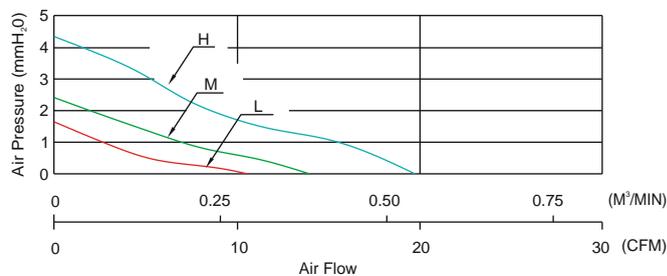


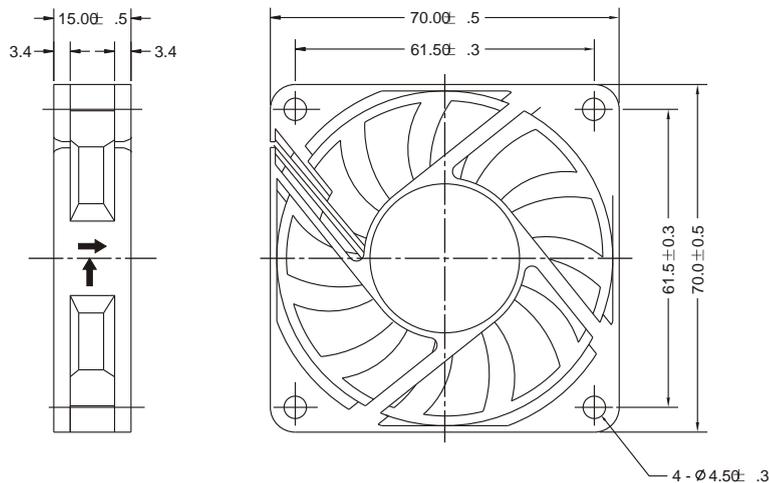


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH7015S	Sleeve	H	12	6.0	0.35	4200	32.50	0.920	4.34	36.01	•	•	•	•	•	48	200	10.6
RDM7015S				6.0	0.25	3600	27.29	0.772	3.23	31.98	•	•	•	•	•			
RDL7015S				6.0	0.16	3000	22.24	0.629	2.27	27.85	•	•	•	•	•			
RDH7015B	Ball			6.0	0.35	4200	32.50	0.920	4.34	36.01	•	•	•	•	•			
RDM7015B				6.0	0.25	3600	27.29	0.772	3.23	31.98	•	•	•	•	•			
RDL7015B				6.0	0.16	3000	22.24	0.629	2.27	27.85	•	•	•	•	•			

SAFETY APPROVALS (安規認證)

	CE	UL	CUL
12V	•	•	•

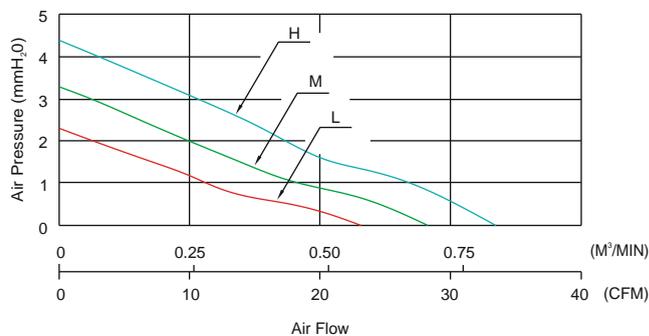


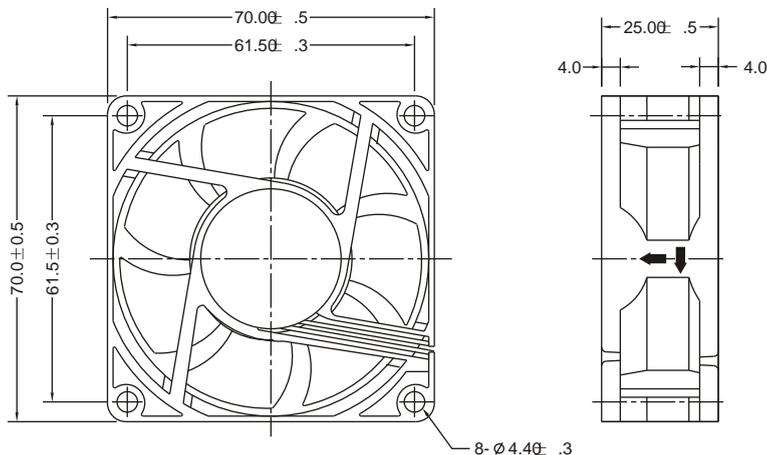


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH7025S5	Sleeve	H	5	3.5	0.70	4500	34.63	0.980	5.70	35.96	•	•	•	•	•	65	100	7.6
RDM7025S5				3.5	0.55	4000	31.53	0.893	4.95	31.49	•	•	•	•	•			
RDL7025S5				3.5	0.30	3000	23.72	0.672	3.10	24.84	•	•	•	•	•			
RDH7025B5	Ball			3.5	0.70	4500	34.63	1.151	5.70	35.96	•	•	•	•	•			
RDM7025B5				3.5	0.55	4000	31.53	0.893	4.95	31.49	•	•	•	•	•			
RDL7025B5				3.5	0.30	3000	23.72	0.672	3.10	24.84	•	•	•	•	•			
RDH7025S	Sleeve	12	6.0	0.40	5100	40.64	1.151	7.57	37.84	•	•	•	•	•				
RDM7025S			6.0	0.20	4000	31.53	0.893	4.95	31.49	•	•	•	•	•				
RDL7025S			6.0	0.15	3000	23.72	0.672	3.10	24.84	•	•	•	•	•				
RDH7025B	Ball		6.0	0.40	5100	40.64	1.151	7.57	37.84	•	•	•	•	•				
RDM7025B			6.0	0.20	4000	31.53	0.893	4.95	31.49	•	•	•	•	•				
RDL7025B			6.0	0.15	3000	23.72	0.672	3.10	24.84	•	•	•	•	•				
RDH7025S2	Sleeve	24	12.0	0.22	5100	40.64	1.151	7.57	37.84	•	•	•	•	•				
RDM7025S2			12.0	0.12	4000	31.53	0.893	4.95	31.49	•	•	•	•	•				
RDL7025S2			12.0	0.10	3000	23.72	0.672	3.10	24.84	•	•	•	•	•				
RDH7025B2	Ball		12.0	0.20	5100	40.64	1.151	7.57	37.84	•	•	•	•	•				
RDM7025B2			12.0	0.12	4000	31.53	0.893	4.95	31.49	•	•	•	•	•				
RDL7025B2			12.0	0.10	3000	23.72	0.672	3.10	24.84	•	•	•	•	•				

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV
5V	•	•	•	•
12V	•	•	•	•
24V	•	•	•	•

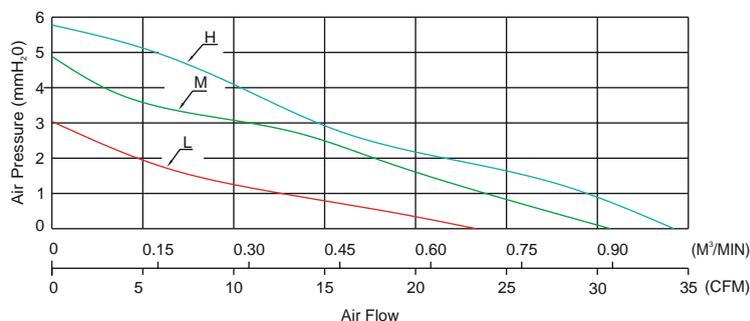


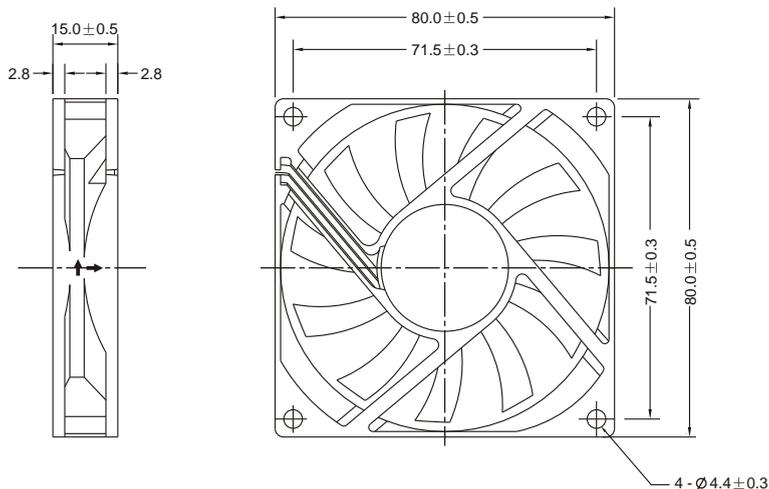


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH8015S	Sleeve	B	12	6.0	0.17	3000	31.22	0.8841	2.66	31.06	•	•	•	•	•	40	200	10.0
RDM8015S				6.0	0.14	2500	26.01	0.7365	1.95	27.08	•	•	•	•	•			
RDL8015S				6.0	0.09	2000	20.87	0.591	1.28	22.08	•	•	•	•	•			
RDH8015B	Ball			6.0	0.17	3000	31.22	0.8841	2.66	31.06	•	•	•	•	•			
RDM8015B				6.0	0.14	2500	26.01	0.7365	1.95	27.08	•	•	•	•	•			
RDL8015B				6.0	0.09	2000	20.87	0.591	1.28	22.08	•	•	•	•	•			
RDH8015S2	Sleeve	B	24	12.0	0.15	3000	31.22	0.8841	2.66	31.06	•	•	•	•	•	40	200	10.0
RDM8015S2				12.0	0.13	2500	26.01	0.7365	1.95	27.08	•	•	•	•	•			
RDL8015S2				12.0	0.10	2000	20.87	0.591	1.28	22.08	•	•	•	•	•			
RDH8015B2	Ball			12.0	0.15	3000	31.22	0.8841	2.66	31.06	•	•	•	•	•			
RDM8015B2				12.0	0.13	2500	26.01	0.7365	1.95	27.08	•	•	•	•	•			
RDL8015B2				12.0	0.10	2000	20.87	0.591	1.28	22.08	•	•	•	•	•			

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	CSA	VDE
12V	•	•	•	•	•	
24V						•

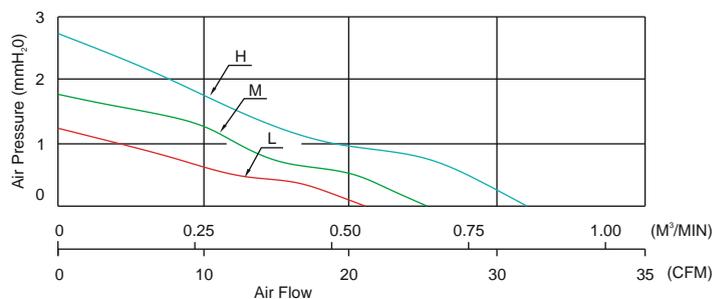


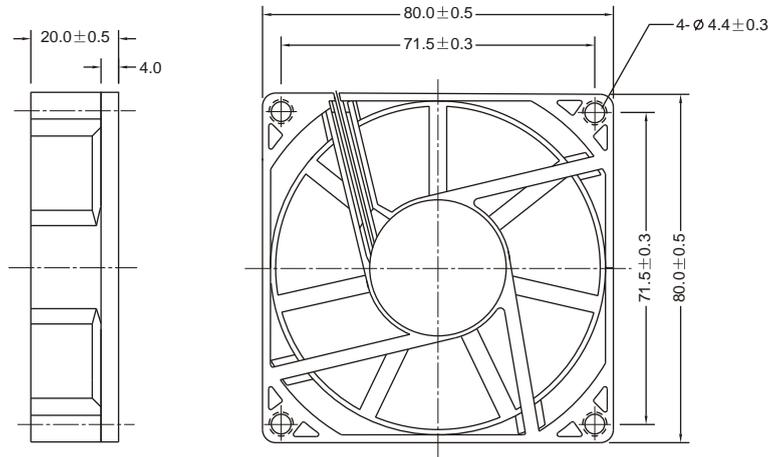


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBa	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH8020S	Sleeve	E	12	6.0	0.23	3500	38.81	1.099	3.30	35.49	•	•	•	•	•	64	100	7.3
RDM8020S				6.0	0.17	3000	33.50	0.9486	2.49	31.73	•	•	•	•	•			
RDL8020S				6.0	0.13	2500	27.69	0.7841	1.77	26.82	•	•	•	•	•			
RDH8020B	Ball			6.0	0.23	3500	38.81	1.099	3.30	35.49	•	•	•	•	•			
RDM8020B				6.0	0.17	3000	33.50	0.9486	2.49	31.73	•	•	•	•	•			
RDL8020B				6.0	0.13	2500	27.69	0.7481	1.77	26.82	•	•	•	•	•			
RDH8020S2	Sleeve	24	12.0	12.0	0.21	3500	38.81	1.099	3.30	35.49	•	•	•	•	•	64	100	7.3
RDM8020S2				12.0	0.14	3000	33.50	0.9486	2.49	31.73	•	•	•	•	•			
RDL8020S2				12.0	0.12	2500	27.69	0.7841	1.77	26.82	•	•	•	•	•			
RDH8020B2	Ball			12.0	0.21	3500	38.81	1.099	3.30	35.49	•	•	•	•	•			
RDM8020B2				12.0	0.14	3000	33.50	0.9486	2.49	31.73	•	•	•	•	•			
RDL8020B2				12.0	0.12	2500	27.69	0.7481	1.77	26.82	•	•	•	•	•			

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV
12V	•	•	•	•
24V	•	•	•	•

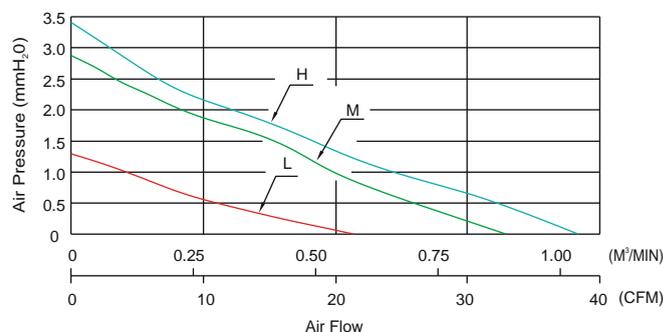


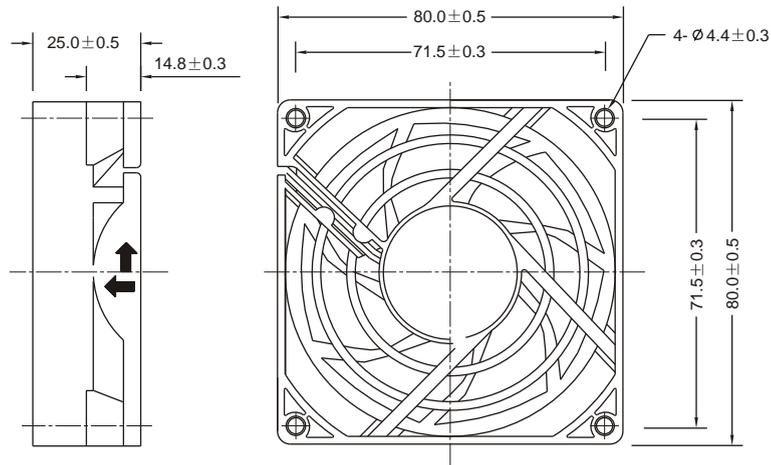


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBa	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH8025S5	Sleeve	F	5	3.5	0.40	3000	24.03	0.679	2.16	29.60	•	•	•	•	•	76	100	9.0
RDM8025S5				3.5	0.28	2500	19.32	0.571	1.58	24.81	•	•	•	•	•			
RDL8025S5				3.5	0.22	2000	15.95	0.455	1.09	21.01	•	•	•	•	•			
RDH8025B5	Ball			3.5	0.40	3000	24.03	0.679	2.16	29.60	•	•	•	•	•			
RDM8025B5				3.5	0.28	2500	19.32	0.571	1.58	24.81	•	•	•	•	•			
RDL8025B5				3.5	0.22	2000	15.95	0.455	1.09	21.01	•	•	•	•	•			
RDH8025S	Sleeve		12	6.0	0.17	3000	24.03	0.679	2.16	29.60	•	•	•	•	•			
RDM8025S				6.0	0.11	2500	19.32	0.571	1.58	24.81	•	•	•	•	•			
RDL8025S				6.0	0.08	2000	15.95	0.455	1.09	21.01	•	•	•	•	•			
RDH8025B	Ball			6.0	0.17	3000	24.03	0.679	2.16	29.60	•	•	•	•	•			
RDM8025B				6.0	0.11	2500	19.32	0.571	1.58	24.81	•	•	•	•	•			
RDL8025B				6.0	0.08	2000	15.95	0.455	1.09	21.01	•	•	•	•	•			
RDH8025S2	Sleeve	24	12.0	0.15	3000	24.03	0.679	2.16	29.60	•	•	•	•	•				
RDM8025S2			12.0	0.12	2500	19.32	0.571	1.58	24.81	•	•	•	•	•				
RDL8025S2			12.0	0.09	2000	15.95	0.455	1.09	21.01	•	•	•	•	•				
RDH8025B2	Ball		12.0	0.15	3000	24.03	0.679	2.16	29.60	•	•	•	•	•				
RDM8025B2			12.0	0.12	2500	19.32	0.571	1.58	24.81	•	•	•	•	•				
RDL8025B2			12.0	0.09	2000	15.95	0.455	1.09	21.01	•	•	•	•	•				

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	CSA	VDE
5V	•	•	•	•		
12V	•	•	•	•	•	
24V	•	•	•	•		•

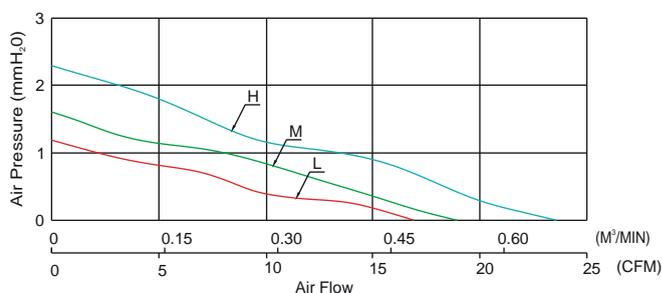


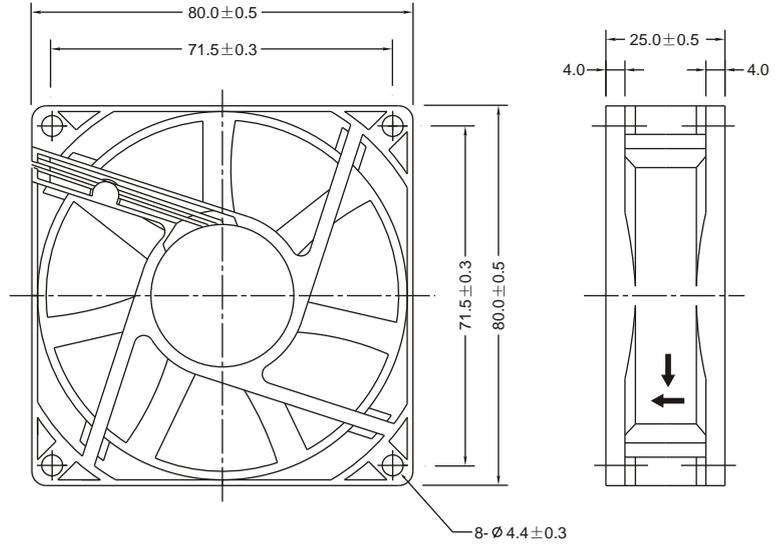


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBa	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH8025S5	Sleeve	H	5	3.5	0.40	3000	35.70	1.011	3.83	30.89	•	•	•	•	•	76	100	9.0
RDM8025S5				3.5	0.28	2500	29.51	0.836	2.62	26.30	•	•	•	•	•			
RDL8025S5				3.5	0.22	2000	23.50	0.665	1.78	21.83	•	•	•	•	•			
RDH8025B5	Ball			3.5	0.40	3000	35.70	1.011	3.83	30.89	•	•	•	•	•			
RDM8025B5				3.5	0.28	2500	29.51	0.836	2.62	26.30	•	•	•	•	•			
RDL8025B5				3.5	0.22	2000	23.50	0.665	1.78	21.83	•	•	•	•	•			
RDH8025S	Sleeve		12	6.0	0.17	3000	35.70	1.011	3.83	30.89	•	•	•	•	•			
RDM8025S				6.0	0.11	2500	29.51	0.836	2.62	26.30	•	•	•	•	•			
RDL8025S				6.0	0.08	2000	23.50	0.665	1.78	21.83	•	•	•	•	•			
RDH8025B	Ball			6.0	0.17	3000	35.70	1.011	3.83	30.89	•	•	•	•	•			
RDM8025B				6.0	0.11	2500	29.51	0.836	2.62	26.30	•	•	•	•	•			
RDL8025B				6.0	0.08	2000	23.50	0.665	1.78	21.83	•	•	•	•	•			
RDH8025S2	Sleeve	24	12.0	0.15	3000	35.70	1.011	3.83	30.89	•	•	•	•	•				
RDM8025S2				0.12	2500	29.51	0.836	2.62	26.30	•	•	•	•	•				
RDL8025S2				0.09	2000	23.50	0.665	1.78	21.83	•	•	•	•	•				
RDH8025B2	Ball			0.15	3000	35.70	1.011	3.83	30.89	•	•	•	•	•				
RDM8025B2				0.12	2500	29.51	0.836	2.62	26.30	•	•	•	•	•				
RDL8025B2				0.09	2000	23.50	0.665	1.78	21.83	•	•	•	•	•				

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	CSA	VDE
5V	•	•	•	•		
12V	•	•	•	•	•	
24V	•	•	•	•		•

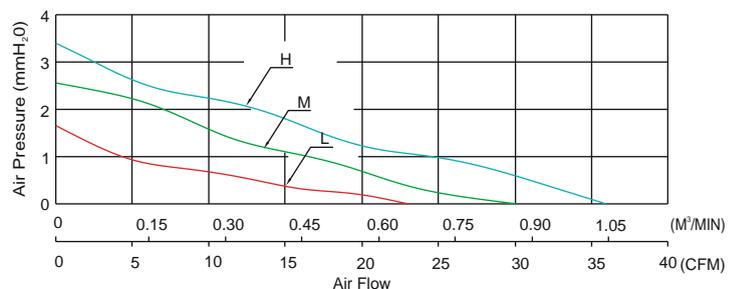


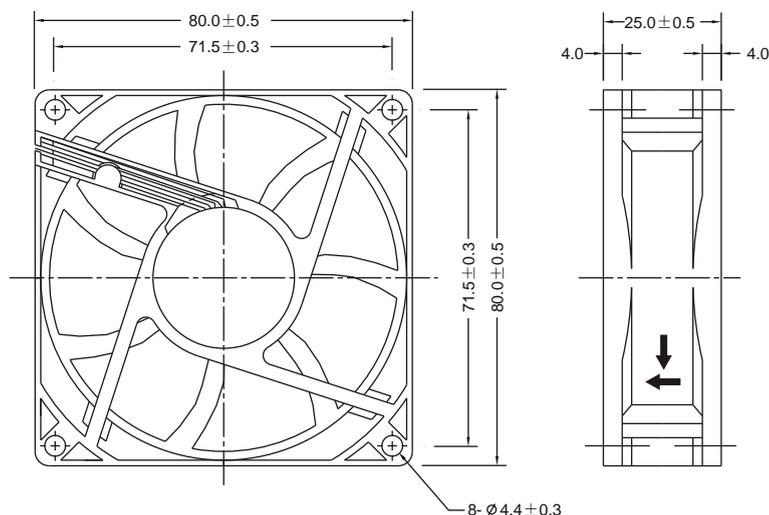


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH8025S1	Sleeve	H	12	6.0	0.23	3000	41.00	1.161	3.32	29.77	•	•	•	•	•	76	100	9.0
RDM8025S1				6.0	0.16	2500	33.42	0.946	2.29	25.10	•	•	•	•	•			
RDL8025S1				6.0	0.13	2000	26.57	0.752	1.54	21.21	•	•	•	•	•			
RDH8025B1	Ball			6.0	0.23	3000	41.00	1.161	3.32	29.77	•	•	•	•	•			
RDM8025B1				6.0	0.16	2500	33.42	0.946	2.29	25.10	•	•	•	•	•			
RDL8025B1				6.0	0.13	2000	26.57	0.752	1.54	21.21	•	•	•	•	•			
RDH8025S2	Sleeve	24	12.0	12.0	0.15	3000	41.00	1.161	3.32	29.77	•	•	•	•	•	76	100	9.0
RDM8025S2				12.0	0.12	2500	33.42	0.946	2.29	25.10	•	•	•	•	•			
RDL8025S2				12.0	0.09	2000	26.57	0.752	1.54	21.21	•	•	•	•	•			
RDH8025B2	Ball			12.0	0.15	3000	41.00	1.161	3.32	29.77	•	•	•	•	•			
RDM8025B2				12.0	0.12	2500	33.42	0.946	2.29	25.10	•	•	•	•	•			
RDL8025B2				12.0	0.09	2000	26.57	0.752	1.54	21.21	•	•	•	•	•			

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	CSA	VDE
12V	•	•	•	•	•	
24V	•	•	•	•		•

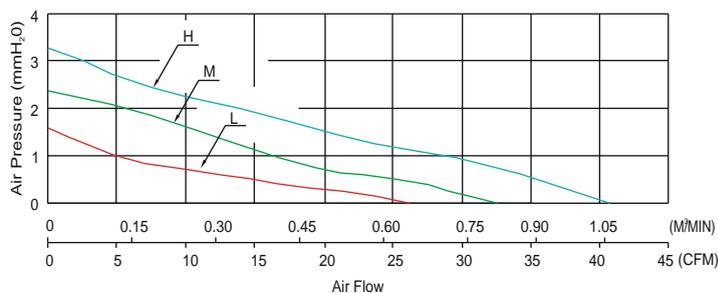


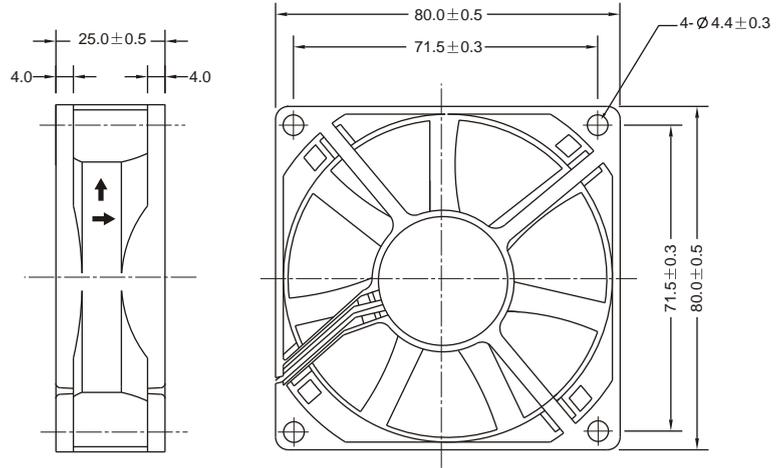


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH8025S5	Sleeve	N	5	3.5	0.40	3000	39.90	1.1298	3.72	30.17	•	•	•	•	•	76	100	9.0
RDM8025S5				3.5	0.28	2500	32.91	0.9319	2.61	26.92	•	•	•	•	•			
RDL8025S5				3.5	0.22	2000	26.29	0.7444	1.75	22.26	•	•	•	•	•			
RDH8025B5	Ball			3.5	0.40	3000	39.90	1.1298	3.72	30.17	•	•	•	•	•			
RDM8025B5				3.5	0.28	2500	32.91	0.9319	2.61	26.92	•	•	•	•	•			
RDL8025B5				3.5	0.22	2000	26.29	0.7444	1.75	22.26	•	•	•	•	•			
RDH8025S	Sleeve		12	6.0	0.17	3000	39.90	1.1298	3.72	30.17	•	•	•	•	•			
RDM8025S				6.0	0.11	2500	32.91	0.9319	2.61	26.92	•	•	•	•	•			
RDL8025S				6.0	0.08	2000	26.29	0.7444	1.75	22.26	•	•	•	•	•			
RDH8025B	Ball			6.0	0.17	3000	39.90	1.1298	3.72	30.17	•	•	•	•	•			
RDM8025B				6.0	0.11	2500	32.91	0.9319	2.61	26.92	•	•	•	•	•			
RDL8025B				6.0	0.08	2000	26.29	0.7444	1.75	22.26	•	•	•	•	•			
RDH8025S2	Sleeve	24	12.0	0.15	3000	39.90	1.1298	3.72	30.17	•	•	•	•	•				
RDM8025S2				0.12	2500	32.91	0.9319	2.61	26.92	•	•	•	•	•				
RDL8025S2				0.09	2000	26.29	0.7444	1.75	22.26	•	•	•	•	•				
RDH8025B2	Ball			0.15	3000	39.90	1.1298	3.72	30.17	•	•	•	•	•				
RDM8025B2				0.12	2500	32.91	0.9319	2.61	26.92	•	•	•	•	•				
RDL8025B2				0.09	2000	26.29	0.7444	1.75	22.26	•	•	•	•	•				

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	CSA	VDE
5V	•	•	•	•		
12V	•	•	•	•	•	
24V	•	•	•	•		•

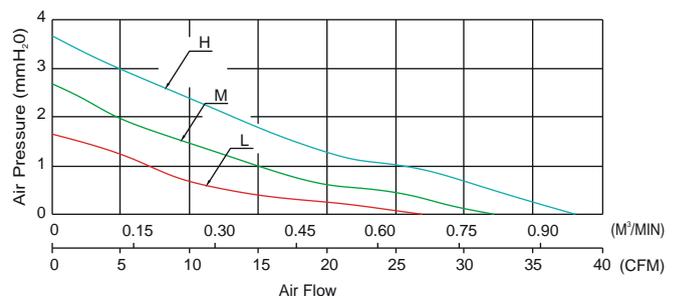


92x92x25mm

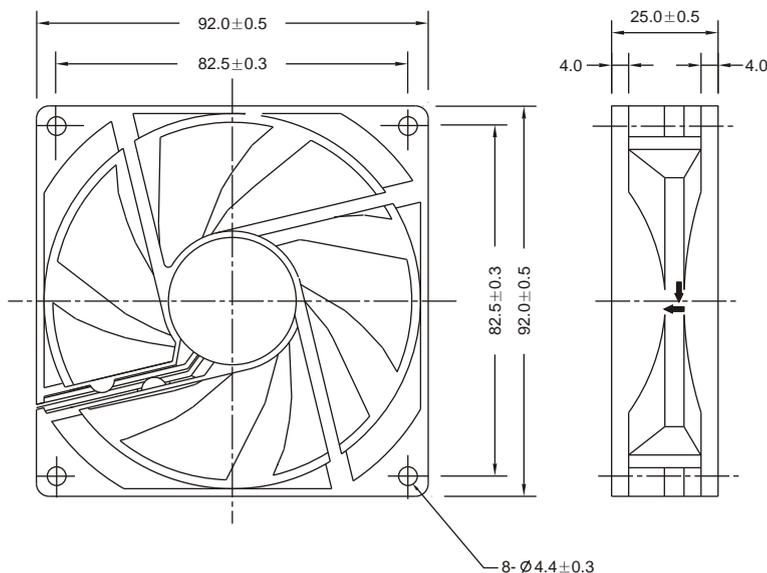


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH9025S	Sleeve	H	12	6.0	0.23	2800	54.63	1.547	3.34	32.96	•	•	•	•	•	85	100	10.2
RDM9025S				6.0	0.19	2500	48.17	1.364	2.65	29.98	•	•	•	•	•			
RDL9025S				6.0	0.16	2000	39.00	1.104	1.76	24.58	•	•	•	•	•			
RDH9025B	Ball			6.0	0.23	2800	54.63	1.547	3.34	32.96	•	•	•	•	•			
RDM9025B				6.0	0.19	2500	48.17	1.364	2.65	29.98	•	•	•	•	•			
RDL9025B				6.0	0.16	2000	39.00	1.104	1.76	24.58	•	•	•	•	•			
RDH9025S2	Sleeve	H	24	12.0	0.22	2800	55.73	1.578	3.19	34.50	•	•	•	•	•	85	100	10.2
RDM9025S2				12.0	0.18	2500	49.65	1.406	2.78	30.90	•	•	•	•	•			
RDL9025S2				12.0	0.15	2000	40.54	1.148	1.85	25.24	•	•	•	•	•			
RDH9025B2	Ball			12.0	0.22	2800	55.73	1.578	3.19	34.50	•	•	•	•	•			
RDM9025B2				12.0	0.18	2500	49.65	1.406	2.78	30.39	•	•	•	•	•			
RDL9025B2				12.0	0.15	2000	40.54	1.148	1.85	25.24	•	•	•	•	•			

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	CSA	VDE
12V	•	•	•	•	•	
24V	•	•	•	•		•

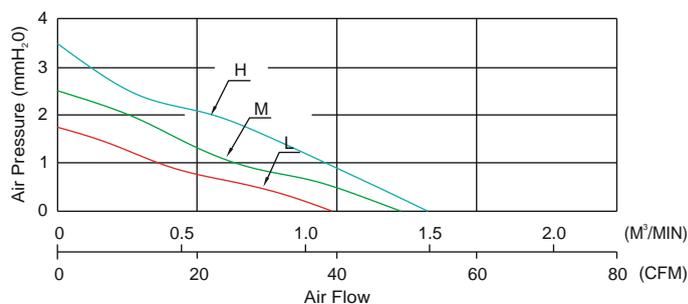



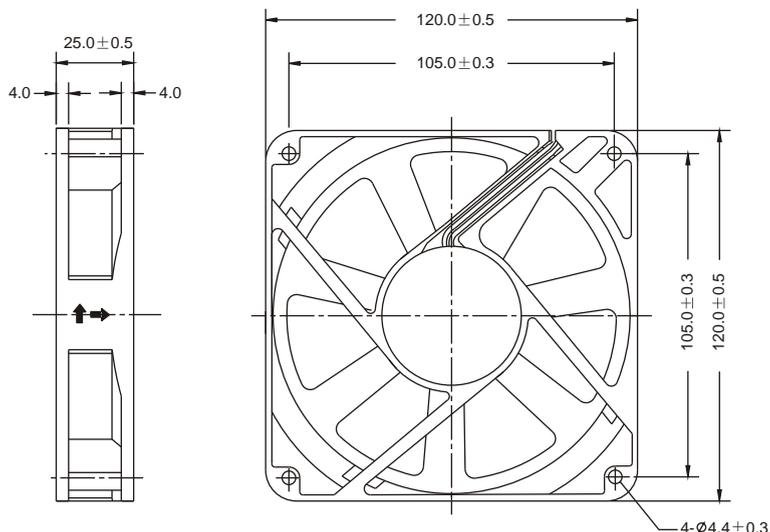


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmHO	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH1225S	Sleeve	H	12	6.0	0.40	2400	91.63	2.595	4.87	40.10	•	•	•	•	•	164	60	11.0
RDM1225S				6.0	0.23	2000	76.92	2.178	3.58	33.23	•	•	•	•	•			
RDL1225S				6.0	0.18	1700	65.12	1.844	2.65	31.57	•	•	•	•	•			
RDH1225B	Ball			6.0	0.40	2400	91.63	2.595	4.87	40.10	•	•	•	•	•			
RDM1225B				6.0	0.23	2000	76.92	2.178	3.58	33.23	•	•	•	•	•			
RDL1225B				6.0	0.18	1700	65.12	1.844	2.65	31.57	•	•	•	•	•			
RDH1225S2	Sleeve	24	12.0	0.35	2400	91.63	2.595	4.87	40.10	•	•	•	•	•				
RDM1225S2			12.0	0.20	2000	76.92	2.178	3.58	33.23	•	•	•	•	•				
RDL1225S2			12.0	0.13	1700	65.12	1.844	2.65	31.57	•	•	•	•	•				
RDH1225B2	Ball		12.0	0.35	2400	91.63	2.595	4.87	40.10	•	•	•	•	•				
RDM1225B2			12.0	0.20	2000	76.92	2.178	3.58	33.23	•	•	•	•	•				
RDL1225B2			12.0	0.13	1700	65.12	1.844	2.65	31.57	•	•	•	•	•				

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	CSA	VDE
12V	•	•	•	•	•	
24V						•

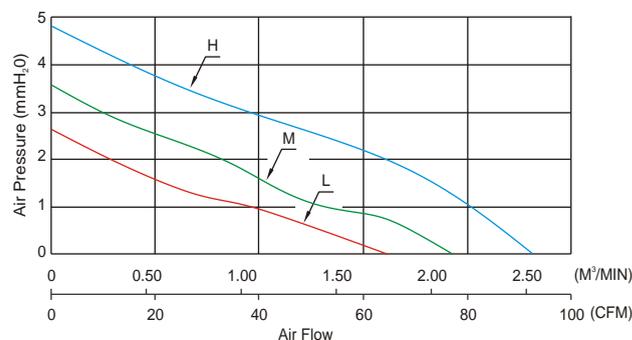


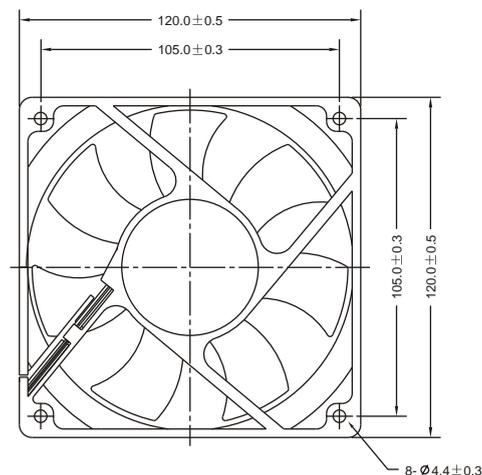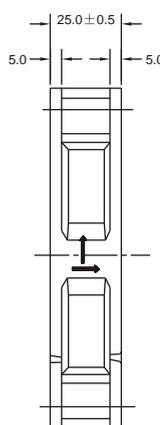


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmHO	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDH1225S	Sleeve	L	12	6.0	0.40	2400	99.61	2.821	3.86	36.74	•	•	•	•	•	164	60	11.0
RDM1225S				6.0	0.23	2000	81.35	2.304	2.74	32.50	•	•	•	•	•			
RDL1225S				6.0	0.18	1700	72.15	2.043	2.04	27.21	•	•	•	•	•			
RDH1225B	Ball			6.0	0.40	2400	99.61	2.821	3.86	36.74	•	•	•	•	•			
RDM1225B				6.0	0.23	2000	81.35	2.304	2.74	32.50	•	•	•	•	•			
RDL1225B				6.0	0.18	1700	72.15	2.043	2.04	27.21	•	•	•	•	•			
RDH1225S2	Sleeve	24	12.0	0.35	0.20	2400	99.61	2.821	3.86	36.74	•	•	•	•	•			
RDM1225S2				0.20	2000	81.35	2.304	2.74	32.50	•	•	•	•	•				
RDL1225S2				0.13	1700	72.15	2.043	2.04	27.21	•	•	•	•	•				
RDH1225B2	Ball			0.35	0.20	2400	99.61	2.821	3.86	36.74	•	•	•	•	•			
RDM1225B2				0.20	2000	81.35	2.304	2.74	32.50	•	•	•	•	•				
RDL1225B2				0.13	1700	72.15	2.043	2.04	27.21	•	•	•	•	•				

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	CSA	VDE
12V	•	•	•	•	•	
24V						•

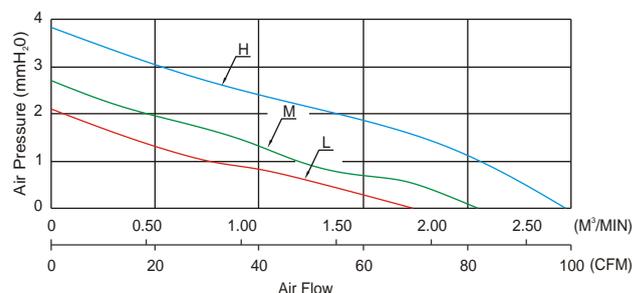


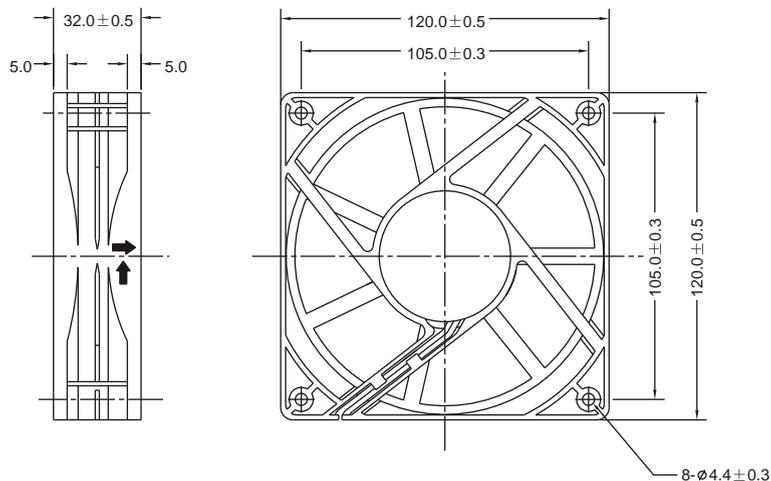


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing		
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs	
RDH1232S	Sleeve	B	12	6.0	0.60	3750	120.48	3.411	10.74	47.14	•	•	•	•	•	250	40	11.0	
RDM1232S				6.0	0.50	3300	106.62	3.019	8.63	44.13	•	•	•	•	•				
RDL1232S				6.0	0.32	2900	93.02	2.634	6.90	40.56	•	•	•	•	•				
RDH1232B	Ball			6.0	0.60	3750	120.48	3.411	10.74	47.14	•	•	•	•	•				
RDM1232B				6.0	0.50	3300	106.62	3.019	8.63	44.13	•	•	•	•	•				
RDL1232B				6.0	0.32	2900	93.02	2.634	6.90	40.56	•	•	•	•	•				
RDH1232S2	Sleeve		24	12.0	0.45	3750	120.48	3.411	10.74	47.14	47.14	•	•	•	•				•
RDM1232S2				12.0	0.28	3300	106.62	3.019	8.63	44.13	44.13	•	•	•	•				•
RDL1232S2				12.0	0.22	2900	93.02	2.634	6.90	40.56	40.56	•	•	•	•				•
RDH1232B2	Ball			12.0	0.45	3750	120.48	3.411	10.74	47.14	47.14	•	•	•	•				•
RDM1232B2				12.0	0.28	3300	106.62	3.019	8.63	44.13	44.13	•	•	•	•				•
RDL1232B2				12.0	0.22	2900	93.02	2.634	6.90	40.56	40.56	•	•	•	•				•
RDH1232S4	Sleeve	48	24.0	0.23	3750	120.48	3.411	10.74	47.14	47.14	•	•	•	•	•				
RDM1232S4			24.0	0.18	3300	106.62	3.019	8.63	44.13	44.13	•	•	•	•	•				
RDL1232S4			24.0	0.15	2900	93.02	2.634	6.90	40.56	40.56	•	•	•	•	•				
RDH1232B4	Ball		24.0	0.23	3750	120.48	3.411	10.74	47.14	47.14	•	•	•	•	•				
RDM1232B4			24.0	0.18	3300	106.62	3.019	8.63	44.13	44.13	•	•	•	•	•				
RDL1232B4			24.0	0.15	2900	93.02	2.634	6.90	40.56	40.56	•	•	•	•	•				

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	VDE
12V	•	•	•	•	
24V	•	•	•	•	•
48V	•	•	•	•	

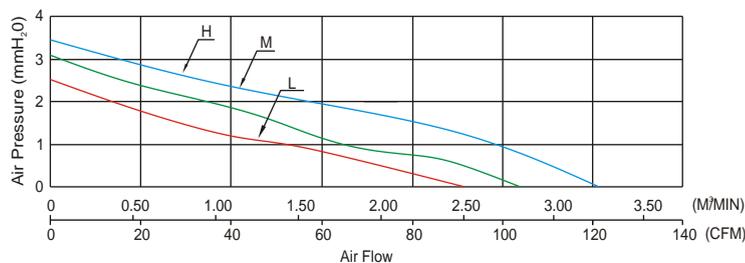


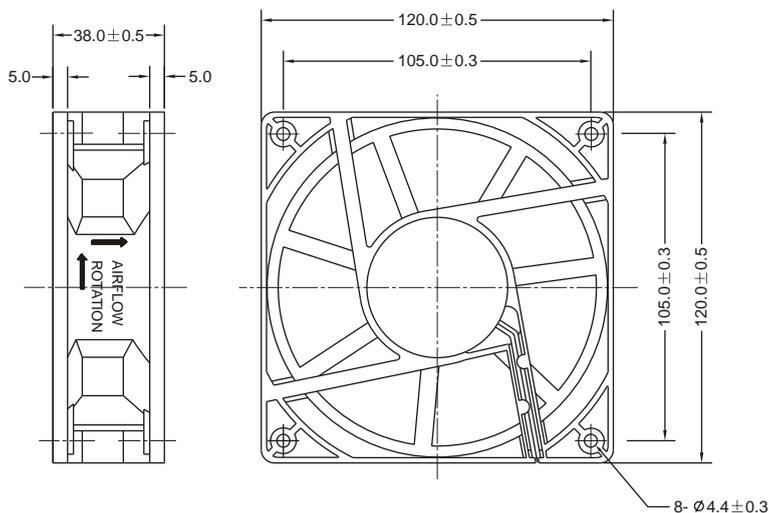



Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDD1238S	Sleeve	B	12	6.0	6.0	3000	126.67	3.586	7.83	41.94	•	•	•	•	•	260	40	12.5
RDH1238S				6.0	0.60	2700	113.36	3.210	6.50	40.80	•	•	•	•	•			
RDM1238S				6.0	0.40	2400	100.48	2.845	5.22	36.50	•	•	•	•	•			
RDL1238S				6.0	0.25	2000	83.21	2.356	3.73	31.51	•	•	•	•	•			
RDD1238B	Ball			6.0	0.60	3000	126.67	3.586	7.83	41.94	•	•	•	•	•			
RDH1238B				6.0	0.60	2700	113.36	3.210	6.50	40.80	•	•	•	•	•			
RDM1238B				6.0	0.40	2400	100.48	2.845	5.22	36.50	•	•	•	•	•			
RDL1238B				6.0	0.25	2000	83.21	2.356	3.73	31.51	•	•	•	•	•			
RDD1238S2	Sleeve	24	12.0	0.40	3000	126.67	3.586	7.83	41.94	•	•	•	•	•				
RDH1238S2			12.0	0.40	2700	113.36	3.210	6.50	40.80	•	•	•	•	•				
RDM1238S2			12.0	0.30	2400	100.48	2.845	5.22	36.50	•	•	•	•	•				
RDL1238S2			12.0	0.20	2000	83.21	2.356	3.73	31.51	•	•	•	•	•				
RDD1238B2	Ball		12.0	0.40	3000	126.67	3.586	7.83	41.94	•	•	•	•	•				
RDH1238B2			12.0	0.40	2700	113.36	3.210	6.50	40.80	•	•	•	•	•				
RDM1238B2			12.0	0.30	2400	100.48	2.845	5.22	36.50	•	•	•	•	•				
RDL1238B2			12.0	0.20	2000	83.21	2.356	3.73	31.51	•	•	•	•	•				

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	CSA
12V	•	•	•	•	•
24V					

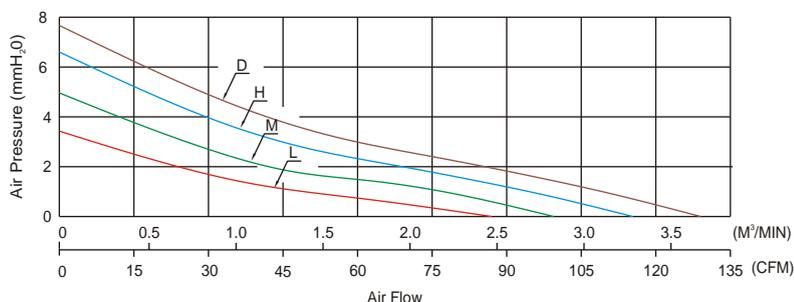


Ø 151x55mm

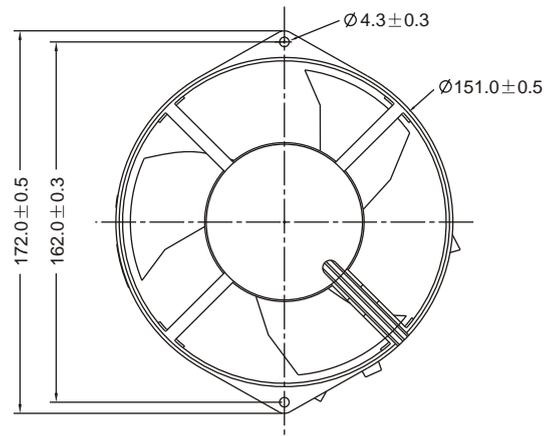
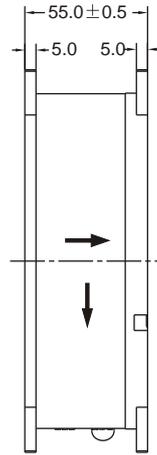


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing		
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs	
RDD1555B2-3	Ball	D	24	12	1.7	4600	336	9.517	31.22	63.11	•	•		•	•	700	20	15	
RDH1555B2-3				12	1.2	4200	305	8.637	25.79	60.74	•	•		•	•				
RDM1555B2-3				12	1.0	3900	280	7.929	23.16	58.28	•	•		•	•				
RDL1555B2-3				12	0.7	3500	253	7.164	18.66	56.85	•	•		•	•				
RDX1555B2-3				12	0.55	3200	236	6.683	14.57	54.35	•	•		•	•				
RDD1555B4-3	Ball		48	24	24	0.9	4600	336	9.515	31.22	63.11	•	•		•				•
RDH1555B4-3					24	0.65	4200	305	8.637	25.79	60.74	•	•		•				•
RDM1555B4-3					24	0.55	3900	280	7.929	23.16	58.28	•	•		•				•
RDL1555B4-3					24	0.45	3500	253	7.164	18.66	56.85	•	•		•				•
RDX1555B4-3					24	0.35	3200	236	6.683	14.57	54.35	•	•		•				•

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	CSA
24V					
48V					

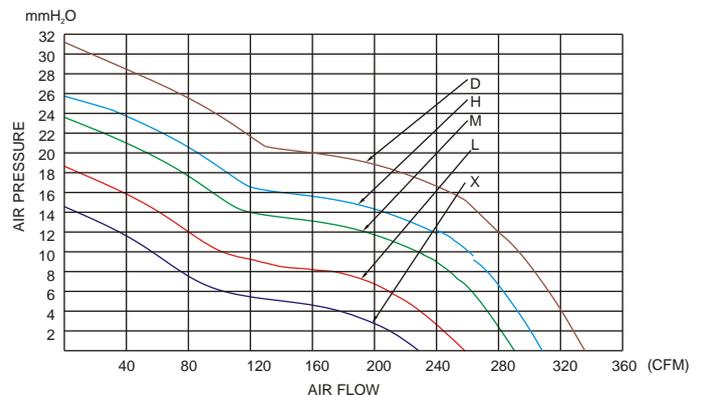


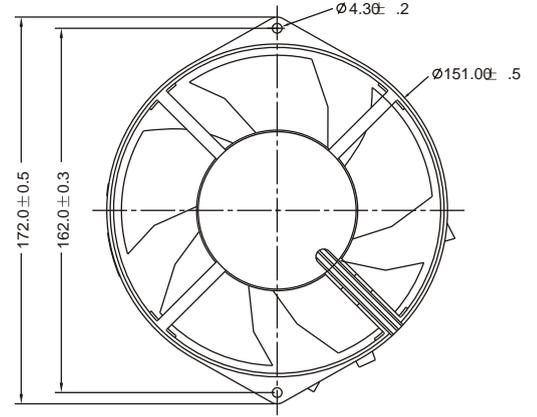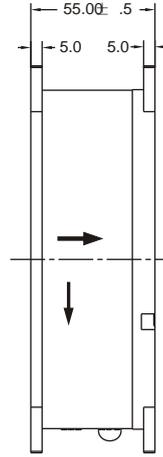


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmHO	dBa	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDD1555B2-5	Ball	D	24	12	1.7	4500	320	9.061	31.29	62.26	•	•		•	•	725	20	15.5
RDH1555B2-5				12	1.2	4000	281	7.957	27.73	60.41	•	•		•	•			
RDM1555B2-5				12	1.0	3800	268	7.589	26.39	59.44	•	•		•	•			
RDL1555B2-5				12	0.7	3400	236	6.683	20.99	55.71	•	•		•	•			
RDX1555B2-5				12	0.55	3100	223	6.315	18.26	53.25	•	•		•	•			
RDD1555B4-5	Ball		48	24	0.9	4500	320	9.061	31.29	62.26	•	•		•	•			
RDH1555B4-5					0.65	4000	281	7.957	27.73	60.41	•	•		•	•			
RDM1555B4-5					0.55	3800	268	7.589	26.39	59.44	•	•		•	•			
RDL1555B4-5					0.45	3400	236	6.683	20.99	55.71	•	•		•	•			
RDX1555B4-5					0.35	3100	223	6.315	18.26	53.25	•	•		•	•			

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	CSA
24V					
48V					

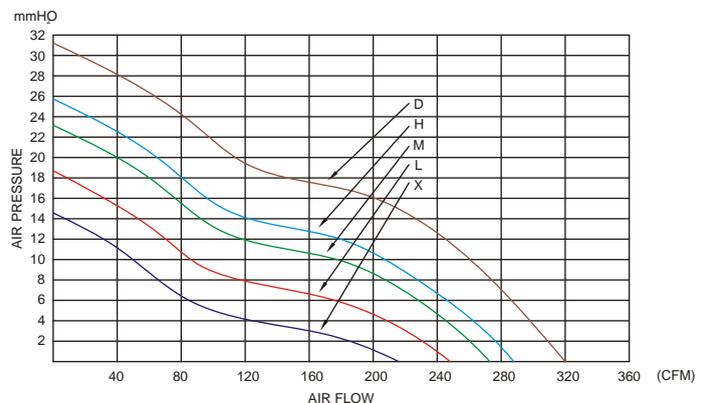


Ø 172x51mm

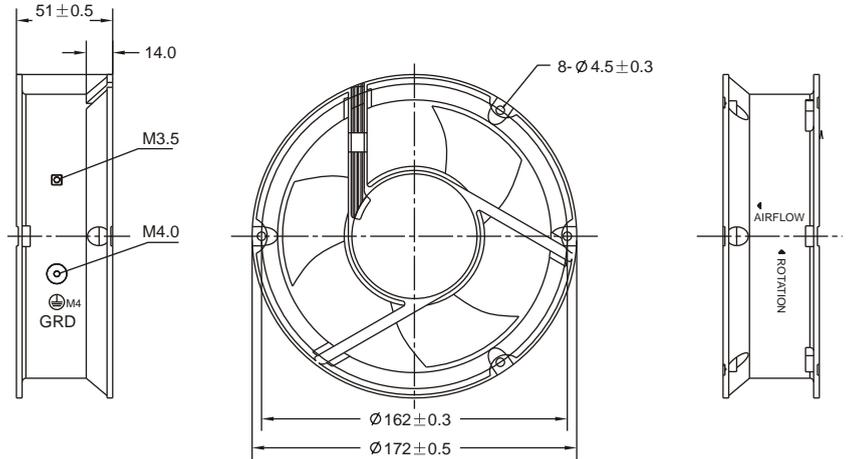


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing		
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs	
RDD1725B2-3	Ball	B	24	12	1.7	4600	336	9.515	31.22	63.11	•	•		•	•	775	20	16.7	
RDH1725B2-3				12	1.2	4200	305	8.637	25.79	60.74	•	•		•	•				
RDM1725B2-3				12	1.0	3900	280	7.929	23.16	58.28	•	•		•	•				
RDL1725B2-3				12	0.7	3500	253	7.164	18.66	56.85	•	•		•	•				
RDX1725B2-3				12	0.55	3200	236	6.683	14.57	54.35	•	•		•	•				
RDD1725B4-3	Ball		48	24	0.9	4600	336	9.515	31.22	63.11	63.11	•	•		•				•
RDH1725B4-3				24	0.65	4200	305	8.637	25.79	60.74	60.74	•	•		•				•
RDM1725B4-3				24	0.55	3900	280	7.929	23.16	58.28	58.28	•	•		•				•
RDL1725B4-3				24	0.45	3500	253	7.164	18.66	56.85	56.85	•	•		•				•
RDX1725B4-3				24	0.35	3200	236	6.683	14.57	54.35	54.35	•	•		•				•

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	CSA
24V					
48V					

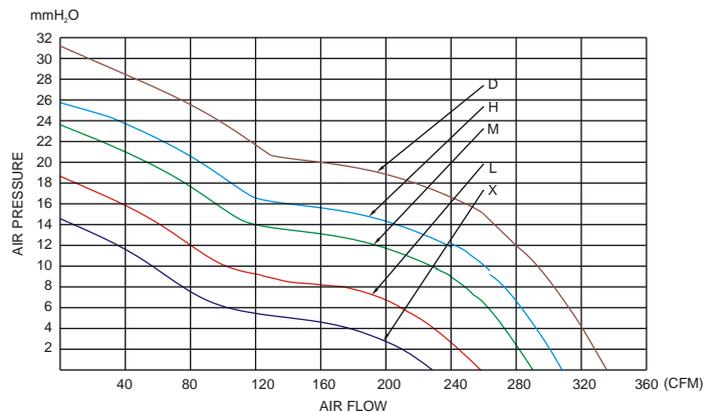


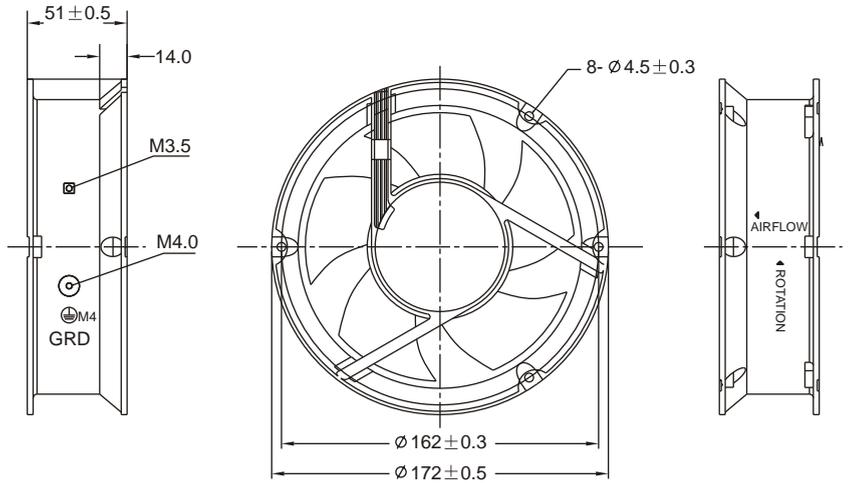


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing		
			VDC	VDC	A	RPM	CFM	CMM	mmHO	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs	
RDD1725B2-5	Ball	B	24	12	1.7	4500	320	9.061	31.29	62.26	•	•		•	•	800	20	17.2	
RDH1725B2-5				12	1.2	4000	281	7.957	27.73	60.41	•	•		•	•				
RDM1725B2-5				12	1.0	3800	268	7.589	26.39	59.44	•	•		•	•				
RDL1725B2-5				12	0.7	3400	236	6.683	20.99	55.71	•	•		•	•				
RDX1725B2-5				12	0.55	3100	223	6.315	18.26	53.25	•	•		•	•				
RDD1725B4-5	Ball		48	24	0.9	0.9	4500	320	9.061	31.29	62.26	•	•		•				•
RDH1725B4-5					0.65	0.65	4000	281	7.957	27.73	60.41	•	•		•				•
RDM1725B4-5					0.55	0.55	3800	268	7.589	26.39	59.44	•	•		•				•
RDL1725B4-5					0.45	0.45	3400	236	6.683	20.99	55.71	•	•		•				•
RDX1725B4-5					0.35	0.35	3100	223	6.315	18.26	53.25	•	•		•				•

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	CSA
24V					
48V					

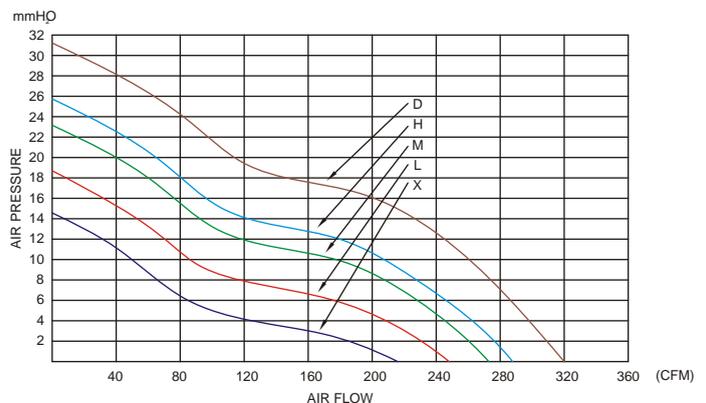


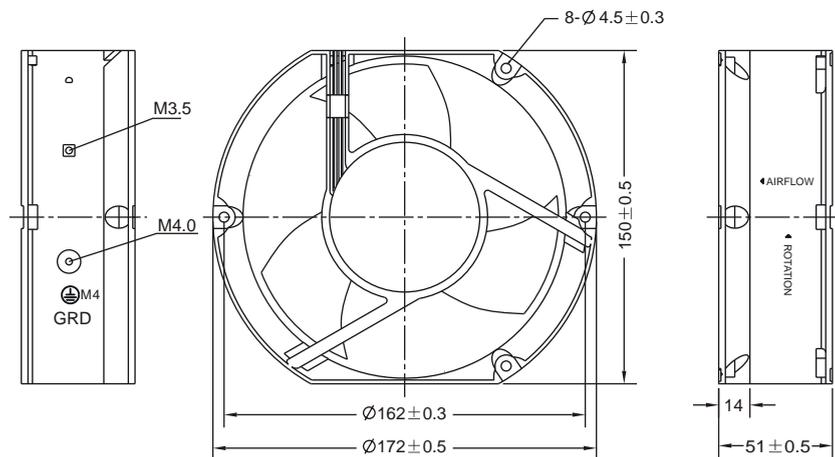


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing		
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBa	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs	
RDD1751B2-3	Ball	H	24	12	1.7	4600	336	9.515	31.22	63.11	•	•		•	•	725	20	15.6	
RDH1751B2-3				12	1.2	4200	305	8.637	25.79	60.74	•	•		•	•				
RDM1751B2-3				12	1.0	3900	280	7.929	23.16	58.28	•	•		•	•				
RDL1751B2-3				12	0.7	3500	253	7.164	18.66	56.85	•	•		•	•				
RDX1751B2-3				12	0.55	3200	236	6.683	14.57	54.35	•	•		•	•				
RDD1751B4-3	Ball		48	24	0.9	0.9	4600	336	9.515	31.22	63.11	•	•		•				•
RDH1751B4-3					0.65	0.65	4200	305	8.637	25.79	60.74	•	•		•				•
RDM1751B4-3					0.55	0.55	3900	280	7.929	23.16	58.28	•	•		•				•
RDL1751B4-3					0.45	0.45	3500	253	7.164	18.66	56.85	•	•		•				•
RDX1751B4-3					0.35	0.35	3200	236	6.683	14.57	54.35	•	•		•				•

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	CSA
24V					
48V					

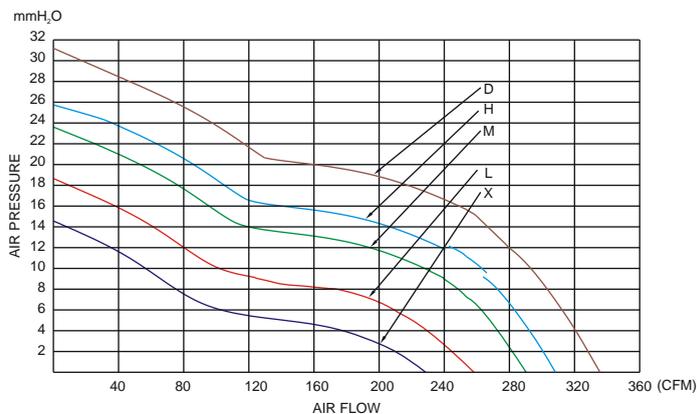


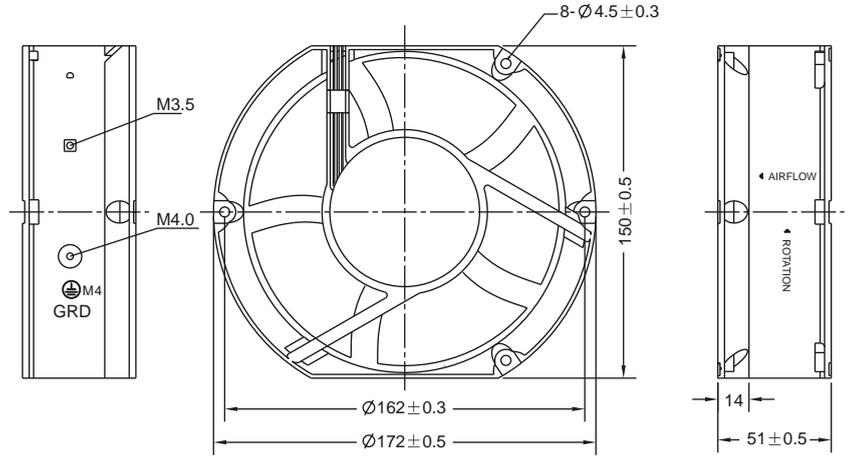


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RDD1751B2-5	Ball	H	24	12	1.7	4500	320	9.061	31.29	62.26	•	•		•	•	750	20	16.1
RDH1751B2-5				12	1.2	4000	288	8.155	27.73	60.41	•	•		•	•			
RDM1751B2-5				12	1.0	3800	274	7.759	26.39	59.44	•	•		•	•			
RDL1751B2-5				12	0.7	3400	245	6.938	20.99	55.71	•	•		•	•			
RDX1751B2-5				12	0.55	3100	222	6.286	18.26	53.25	•	•		•	•			
RDD1751B4-5	Ball		48	24	0.9	4500	320	9.061	31.29	62.26	•	•		•	•			
RDH1751B4-5				24	0.65	4000	288	8.155	27.73	60.41	•	•		•	•			
RDM1751B4-5				24	0.55	3800	274	7.759	26.39	59.44	•	•		•	•			
RDL1751B4-5				24	0.45	3400	245	6.938	20.99	55.71	•	•		•	•			
RDX1751B4-5				24	0.35	3100	222	6.286	18.26	53.25	•	•		•	•			

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV	CSA
24V					
48V					

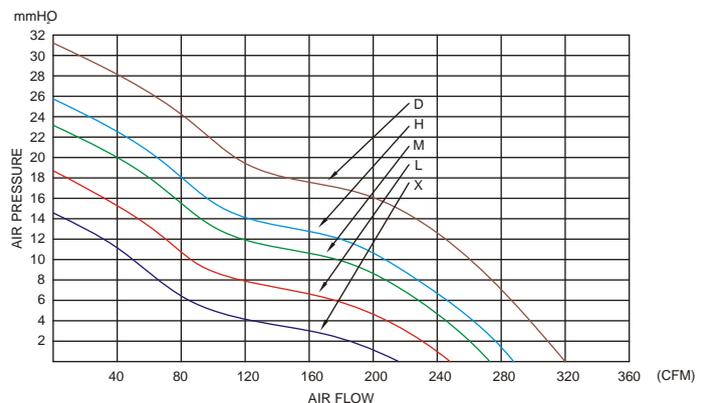



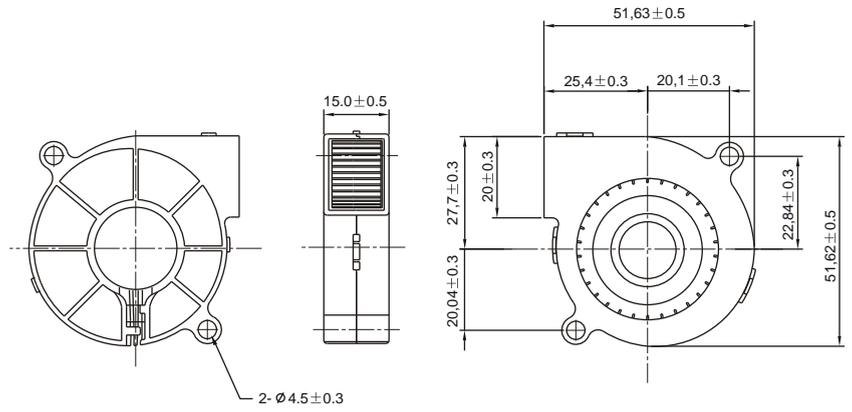


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RBH5015S	Sleeve	A	12	6.0	0.14	5000	4.42	0.125	11.58	38.09	•	•	•	•	•	26	200	6.2
RBM5015S				6.0	0.09	4000	3.43	0.097	7.41	31.40	•	•	•	•	•			
RBL5015S				8.0	0.05	3000	2.47	0.069	3.52	23.97	•	•	•	•	•			
RBH5015B	Ball			6.0	0.14	5000	4.42	0.125	11.58	38.09	•	•	•	•	•			
RBM5015B				6.0	0.09	4000	3.43	0.097	7.41	31.40	•	•	•	•	•			
RBL5015B				8.0	0.05	3000	2.47	0.069	3.52	23.97	•	•	•	•	•			

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV
12V	•	•	•	•

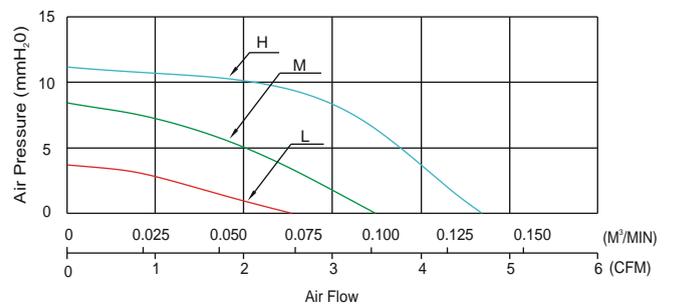


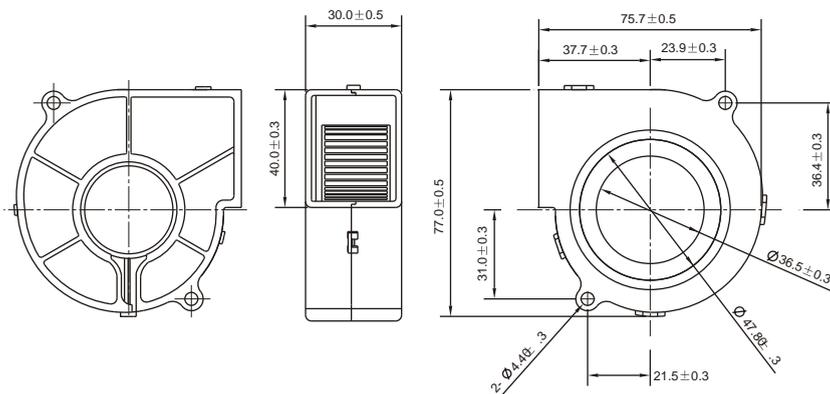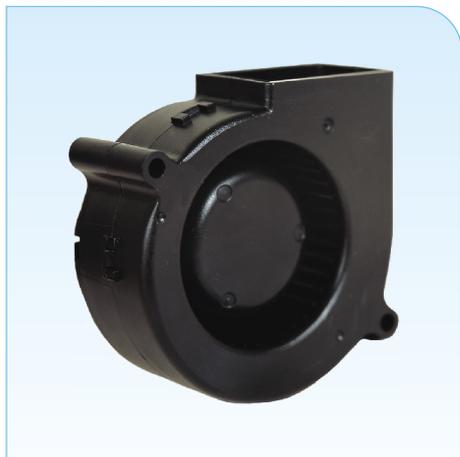


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dB(A)	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RBH8025S1	Sleeve	A	12	6.0	0.23	3000	10.37	0.293	9.63	35.59	•	•	•	•	•	75	80	6.8
RBM8025S1				6.0	0.16	2500	8.66	0.245	6.40	31.74	•	•	•	•	•			
RBL8025S1				6.0	0.13	2000	6.99	0.197	3.75	25.06	•	•	•	•	•			
RBH8025B1	Ball			6.0	0.23	3000	10.37	0.293	9.63	35.59	•	•	•	•	•			
RBM8025B1				6.0	0.16	2500	8.66	0.245	6.40	31.74	•	•	•	•	•			
RBL8025B1				6.0	0.13	2000	6.99	0.197	3.75	25.06	•	•	•	•	•			

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV
12V	•	•	•	•

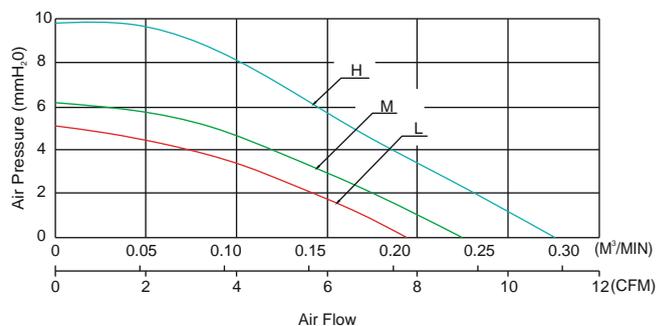


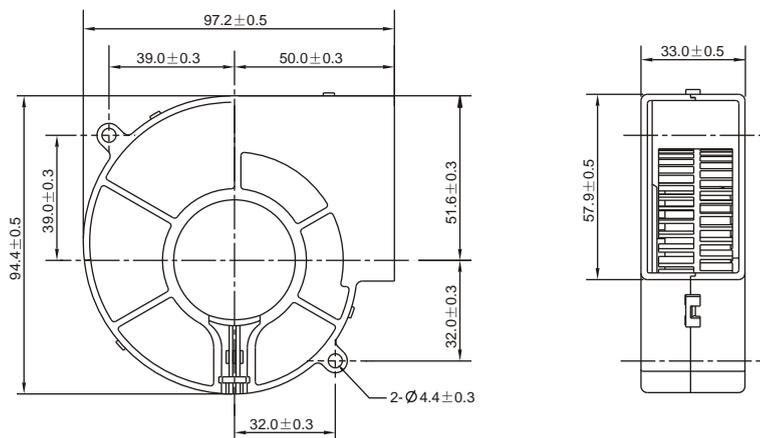


Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBa	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RBH9733S	Sleeve	A	12	6.0	0.80	3300	21.80	0.617	20.42	45.47	•	•	•	•	•	165	80	15.0
RBM9733S				6.0	0.50	2800	18.44	0.522	13.59	41.51	•	•	•	•	•			
RBL9733S				6.0	0.30	2200	14.43	0.408	7.74	35.30	•	•	•	•	•			
RBH9733B	Ball			6.0	0.80	3300	21.80	0.617	20.42	45.47	•	•	•	•	•			
RBM9733B				6.0	0.50	2800	18.44	0.522	13.59	41.51	•	•	•	•	•			
RBL9733B				6.0	0.30	2200	14.43	0.408	7.74	35.30	•	•	•	•	•			
RBH9733S2	Sleeve	24	12.0	0.55	3300	21.80	0.617	20.42	45.47	•	•	•	•	•				
RBM9733S2			12.0	0.35	2800	18.44	0.522	13.59	41.51	•	•	•	•	•				
RBL9733S2			12.0	0.20	2200	14.43	0.408	7.74	35.30	•	•	•	•	•				
RBH9733B2	Ball		12.0	0.55	3300	21.80	0.617	20.42	45.47	•	•	•	•	•				
RBM9733B2			12.0	0.35	2800	18.44	0.522	13.59	41.51	•	•	•	•	•				
RBL9733B2			12.0	0.20	2200	14.43	0.408	7.74	35.30	•	•	•	•	•				
RBH9733S4	Sleeve	48	24.0	0.30	3300	21.80	0.617	20.42	45.47	•	•	•	•	•				
RBM9733S4				0.20	2800	18.44	0.522	13.59	41.51	•	•	•	•	•				
RBL9733S4				0.15	2200	14.43	0.408	7.74	35.30	•	•	•	•	•				
RBH9733B4	Ball			0.30	3300	21.80	0.617	20.42	45.47	•	•	•	•	•				
RBM9733B4				0.20	2800	18.44	0.522	13.59	41.51	•	•	•	•	•				
RBL9733B4				0.15	2200	14.43	0.408	7.74	35.30	•	•	•	•	•				

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV
12V	•	•	•	•
24V	•	•	•	•
48V	•	•	•	•

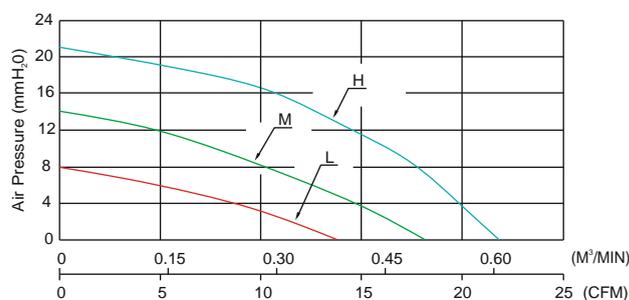

120x120x32mm

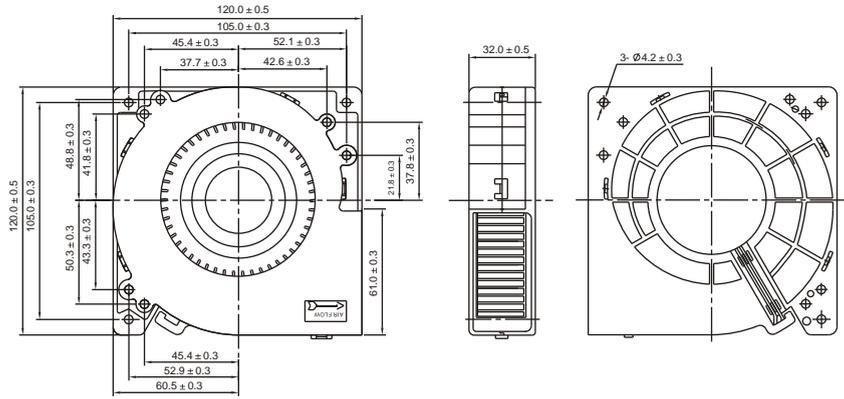

Listed Model	Bearing System	Housing Type	Rated Voltage	Startup Voltage	Rated Current	Speed	Air Flow	Air Flow	Static Pressure	Noise Level	Motor Protection					Weight Gram	Packing	
			VDC	VDC	A	RPM	CFM	CMM	mmH ₂ O	dBA	Resistance Protected	Auto Start	Thermal Speed Control	Alarm Output	Tachometer Output		Qty./Ctn Purchase	G.W./Ctn Kgs
RBH1232B	Ball	B	12	6.0	0.87	2100	33.13	0.938	20.14	47.98	•	•	•	•	•	260	40	11.7
RBM1232B				6.0	0.60	1800	28.23	0.799	13.36	45.34	•	•	•	•	•			
RBL1232B				6.0	0.49	1600	25.07	0.709	9.62	42.42	•	•	•	•	•			
RBH1232B2			24	12.0	0.50	2100	33.13	0.938	20.14	47.98	•	•	•	•	•			
RBM1232B2				12.0	0.35	1800	28.23	0.799	13.36	45.34	•	•	•	•	•			
RBL1232B2				12.0	0.28	1600	25.07	0.709	9.62	42.42	•	•	•	•	•			
RBH1232B4			48	24.0	0.30	2100	33.13	0.938	20.14	47.98	•	•	•	•	•			
RBM1232B4				24.0	0.20	1800	28.23	0.799	13.36	45.34	•	•	•	•	•			
RBL1232B4				24.0	0.15	1600	25.07	0.709	9.62	42.42	•	•	•	•	•			

SAFETY APPROVALS (安規認證)

	CE	UL	CUL	TUV
12V	•	•	•	•
24V	•	•	•	•
48V	•	•	•	•

