

HF115F-Q

MINIATURE HIGH POWER RELAY


File No.: E134517


File No.:116934


File No.: CQC08002028130



Features

- Ambient temperature up to 125 °C
- 5kV dielectric strength (between coil and contacts)
- Low height: 15.7mm
- Creepage distance >8mm
- Meeting VDE 0700, 0631 reinforce insulation
- UL94, V-0 flammability class
- Product in accordance to IEC 60335-1 available
- UL insulation system: Class F
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: Vertical: (41.0 x 12.7 x 15.7) mm
Horizontal: (45.0 x 12.7 x 15.7) mm

CONTACT DATA	
Contact arrangement	1A, 1B
Contact resistance	100mΩ max.(at 1A 6VDC)
Contact material	AgSnO ₂ , AgNi
Contact rating	20A 250VAC
Max. switching voltage	440VAC / 300VDC
Max. switching current	20A
Max. switching power	5000VA
Mechanical endurance	1 x 10 ⁷ OPS
Electrical endurance	1 x 10 ⁵ OPS (See approval reports for more details)

CHARACTERISTICS		
Insulation resistance		1000MΩ (at 500VDC)
Dielectric strength	Between coil & contacts	5000VAC 1min
	Between open contacts	1000VAC 1min
Surge voltage (between coil & contacts)		10kV (1.2 / 50μs)
Operate time (at nomi. volt.)		15ms max.
Release time (at nomi. volt.)		8ms max.
Temperature rise (at nomi. volt.)		55K max.
Shock resistance *	Functional	98m/s ²
	Destructive	980m/s ²
Vibration resistance *		1A: 10Hz to150Hz 10g 1B: 10Hz to150Hz 5g
Humidity		5% to 85% RH
Ambient temperature		-40°C to 125°C
Termination		PCB & QC
Unit weight		Approx. 16g
Construction		Flux proofed

Notes: 1) The data shown above are initial values.
2) * Index is not that of relay length direction.

COIL	
Coil power	Approx. 400mW

COIL DATA					at 23°C
Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Allowable Voltage VDC *	Coil Resistance Ω	
5	3.50	0.5	7.5	62 x (1±10%)	
6	4.20	0.6	9.0	90 x (1±10%)	
9	6.30	0.9	13.5	202 x (1±10%)	
12	8.40	1.2	18.0	360 x (1±10%)	
18	12.6	1.8	27.0	810 x (1±10%)	
24	16.8	2.4	36.0	1440 x (1±10%)	
48	33.6	4.8	72.0	5760 x (1±15%)	
60	42.0	6.0	90.0	7500 x (1±15%)	
110	77.0	11.0	165.0	25200 x (1±15%)	

Notes: * The max. allowable voltage in the COIL DATA is coil overdrive voltage, it is the instantaneous max. voltage which the relay coil could endure in a very short time.

SAFETY APPROVAL RATINGS			
VDE	AgNi	1 Form A	18A 250VAC at 105°C 16A 250VAC at 125°C 12A 400VAC at 105°C
		1 Form B	16A 250VAC at 125°C 12A 400VAC at 105°C
UL/CUL	AgNi	1 Form A 1 Form B	20A 277VAC

Notes: Only some typical ratings are listed above. If more details are required, please contact us.


ORDERING INFORMATION					
Type		HF115F-Q / 012 -1H		3	T (XXX)
Coil voltage		5, 6, 9, 12, 18, 24, 48, 60, 110VDC			
Contact arrangement		1H: 1 Form A		1D: 1 Form B	
Terminals		3: Quick connect terminals horizontal		Nil: Quick connect terminals vertical	
Contact material		T: AgSnO ₂		Nil: AgNi	
Customer special code					

Notes: If water cleaning is required after the relay is assembled on PCB, please contact us for suggestion about suitable parts.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm


Outline Dimensions

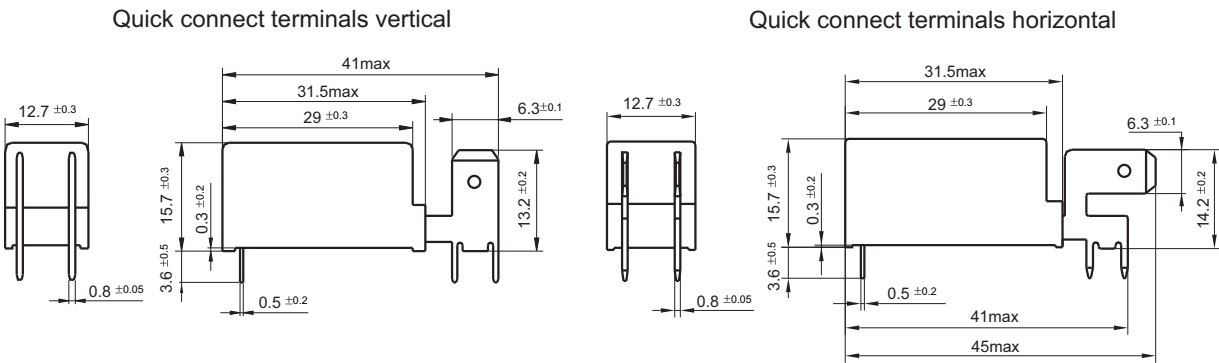

Wiring Diagram
(Bottom view)




PCB Layout
(Bottom view)

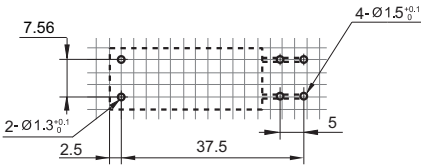

Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤1mm, tolerance should be ±0.2mm; outline dimension > 1mm and ≤5mm, tolerance should be ±0.3mm; outline dimension > 5mm, tolerance should be ±0.4mm.
2) The tolerance without indicating for PCB layout is always ±0.1mm.
3) The width of the gridding is 2.52mm.

CHARACTERISTIC CURVES

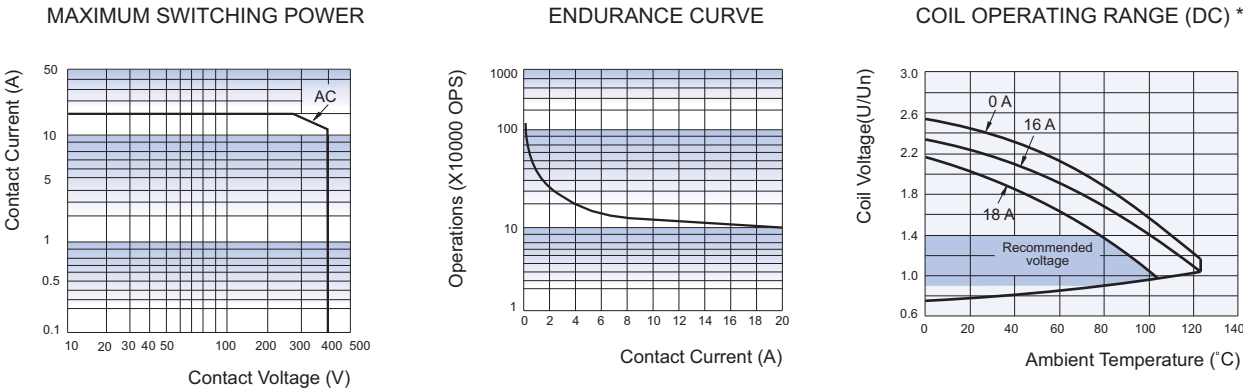

Notes: * The use of a relay with an energising voltage other than the rated coil voltage may lead to reduced electrical life.
An energising voltage over the abver range may damage the insulation of relay coil.

Disclaimer
This datasheet is for the customers' reference. All the specifications are subject to change without notice.
We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.