

HF152F

SUBMINIATURE HIGH POWER RELAY



File No.: E134517



File No.: 40017837



File No.: CQC09002034520



Features

- 20A switching capability
- TV-8 125VAC
- Surge voltage up to 6kV (between coil and contacts)
- Thermal class F: standard type (at 85°C)
- Ambient temperature meets 105°C
- Product in accordance to IEC 60335-1 available
- 1 Form C and 1 Form A configurations available
- Plastic sealed and flux proofed types available
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (21.0 x 16.0 x 20.6) mm

CONTACT DATA

Contact arrangement	1A	1C
Contact resistance	100mΩ max. (at 1A 24VDC)	
Contact material	AgSnO ₂ , AgNi	
Contact rating (Res. load)	20A 125VAC 17A 277VAC 7A 400VAC	16A 250VAC 7A 400VAC (NO)
Max. switching voltage	400VAC	400VAC (NO)
Max. switching current	20A	16A
Max. switching power	4700VA	4000VA
Mechanical endurance	1 x 10 ⁷ OPS	
Electrical endurance	1 x 10 ⁵ OPS	5 x 10 ⁴ OPS

CHARACTERISTICS

Insulation resistance	100MΩ (at 500VDC)	
Dielectric strength	Between coil & contacts	2500VAC 1min
	Between open contacts	1000VAC 1min
Surge voltage(between coil & contacts)	6kV (1.2 / 50μs)	
Operate time (at nomi. volt.)	10ms max.	
Release time (at nomi. volt.)	5ms max.	
Shock resistance	Functional	98m/s ²
	Destructive	980m/s ²
Vibration resistance	10Hz to 55Hz 1.5mm DA	
Humidity	5% to 85% RH	
Ambient temperature	HF152F: -40°C to 85°C HF152F-T: -40°C to 105°C	
Termination	PCB	
Unit weight	Approx.14g	
Construction	Plastic sealed, Flux proofed	

- Notes:** 1) The data shown above are initial values.
2) Please find coil temperature curve in the characteristic curves below.
3) UL insulation system: Class A

COIL

Coil power Approx. 360mW

COIL DATA

at 23°C

Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Allowable Voltage VDC	Coil Resistance Ω
3	2.25	0.3	3.9	25 x (1±10%)
5	3.75	0.5	6.5	70 x (1±10%)
6	4.50	0.6	7.8	100 x (1±10%)
9	6.75	0.9	11.7	225 x (1±10%)
12	9.00	1.2	15.6	400 x (1±10%)
18	13.5	1.8	23.4	900 x (1±10%)
24	18.0	2.4	31.2	1600 x (1±10%)
48	36.0	4.8	62.4	6400 x (1±10%)

SAFETY APPROVAL RATINGS

UL/CUL	20A 125VAC TV-8 125VAC NO/NC: 17A/15A 277VAC NO: 1HP 250VAC NC: 1/2HP 277VAC	
	1 Form A	16A 250VAC 7A 400VAC
VDE (AgSnO ₂)	1 Form C	NO: 16A 250VAC NC: 7A 250VAC

Notes: Only some typical ratings are listed above. If more details are required, please contact us.



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2013 Rev. 1.00

ORDERING INFORMATION

	HF152F	/	012	-1Z	P	S	T	G	Q	(XXX)
Type	HF152F: 85°C, HF152F-T: 105°C									
Coil voltage	3, 5, 6, 9, 12, 18, 24, 48VDC									
Contact arrangement	1H: 1 Form A		1Z: 1 Form C							
Pin version	P: Double pins		Nil: Single pin							
Construction ¹⁾	S: Plastic sealed		Nil: Flux proofed							
Contact material	T: AgSnO ₂		Nil: AgNi							
Contact plating	G: Gold plated		Nil: No gold plated							
Contact capacity	Q: High capacity type 16A 250VAC, at 105°C (Only for HF152F-T)		Nil: Standard type							
Customer special code										


Notes: 1) Under the ambience with dangerous gas like H₂S, SO₂ or NO₂, plastic sealed type is recommended; Please test the relay in real applications. If the ambience allows, flux proofed type is preferentially recommended.
If water cleaning is required after the relay is assembled on PCB, please contact us for suggestion about suitable parts.
2) If plastic sealed type is selected for cleaning purpose, the vent-hole cover should be excised after cleaning.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm


Single pin version

Outline Dimensions

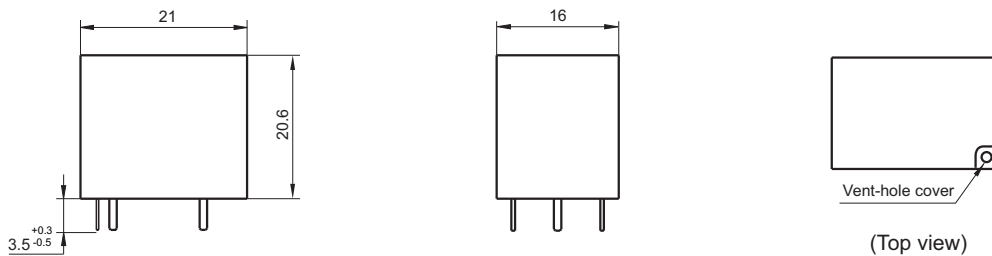


Wiring Diagram

(Bottom view)

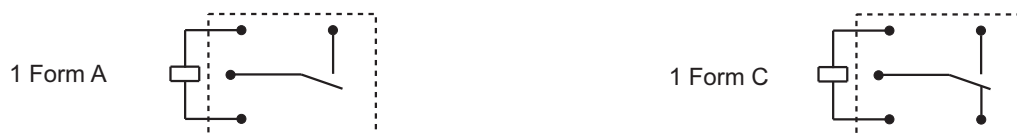

PCB Layout

(Bottom view)



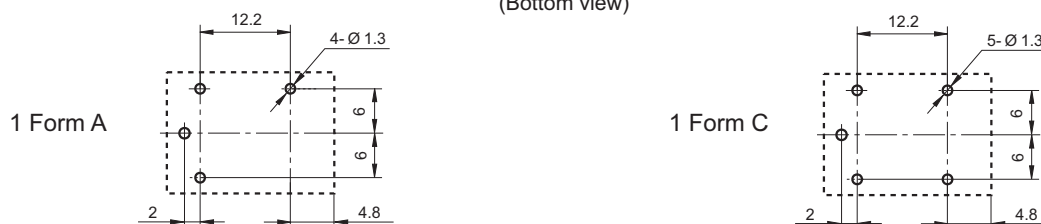


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT



Unit: mm

Double pin version



Outline Dimensions



**Wiring Diagram
(Bottom view)**

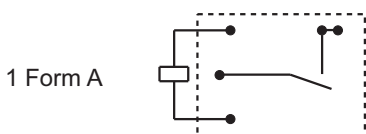


**PCB Layout
(Bottom view)**

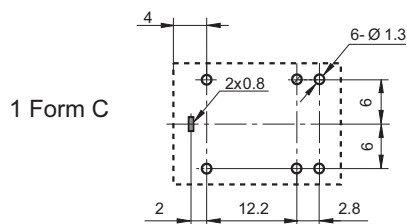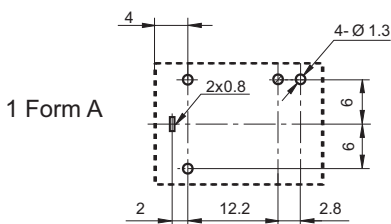


Remark: 1) In case of no tolerance shown in outline dimension: outline dimension $\leq 1\text{mm}$, tolerance should be $\pm 0.2\text{mm}$; outline dimension $> 1\text{mm}$ and $\leq 5\text{mm}$, tolerance should be $\pm 0.3\text{mm}$; outline dimension $> 5\text{mm}$, tolerance should be $\pm 0.4\text{mm}$.
2) The tolerance without indicating for PCB layout is always $\pm 0.1\text{mm}$.

CHARACTERISTIC CURVES


MAX. SWITCHING POWER



ENDURANCE CURVE

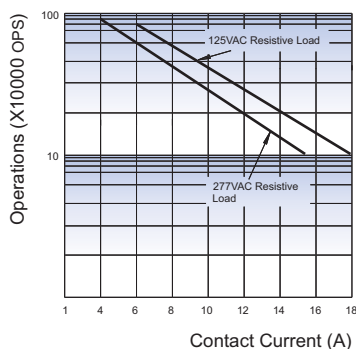

COIL TEMPERATURE RISE

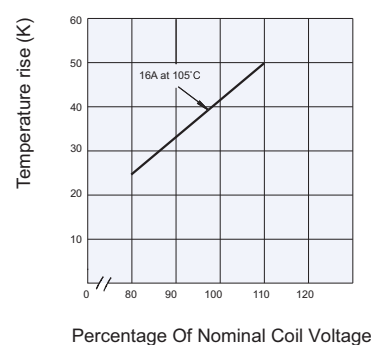

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.