

HF5603

RELAY CONTROL BOX



The box can enlarge the output drive ability of electrical controller in order to drive each implementation components And the box will realize the connection and isolation of control logistic. Meanwhile, it will also control the relative annex of the motor.

Features

- Can switch multi-circuit 27Vd.c. and DC load
- Inner diode with transient suppression
- Can connect and apart with connector quickly
- High anti-mildew and anti-salt frog capability, Can work reliably in such hazardous environment
- With highly established reliability

MAIN TECHNICAL DATA

Ambient temperature

-55°C to 70°C, work 10min at 85°C, the storing temperature is -20°C to 40°C.

Humidity

≥95% (at 20°C ± 5°C)

Operate voltage

The coil rated operate voltage is 27Vd.c.±10%, contacts rated operate voltage is 27Vd.c.±10%, others as per the requirement of GJB181-86 B type power feature.

Connection resistance

The grounding resistance and inner connection resistance will be not over 2.5m ohm.

Insulation resistance

Normally, (normal temp.& cold) no less than 20MΩ, After rated working, no less than 2 MΩ, After damp heat test, no less than 1MΩ.

Dielectric strength

Cold-state AC 500V valid value, leakage current is no less than 1mA.

Mean Time between Failures

≥1200h.

Life

The life of relay box is 300h/ 4 years and the storing time is 3 years.

Weight

The total weight of relay box(include socket) is no less than 3kg.

Products ability

Conformity standard : GJB1032, GJB360A and GJB150




HONGFA RELAY

GJB9001A, ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

OUTLINE DIMENSIONS AND WIRING DIAGRAM

Unit:mm

Outline dimension

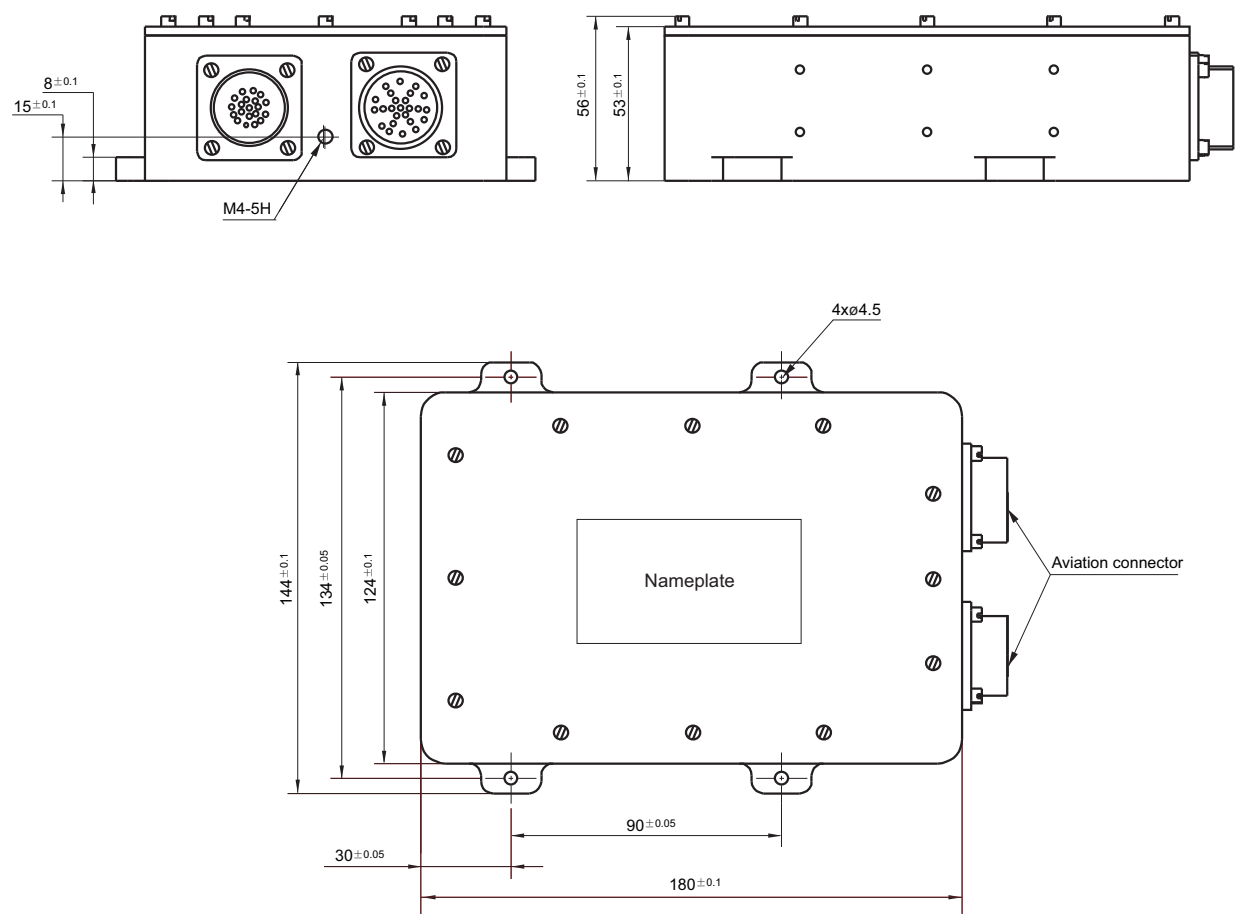

ORDERING INFORMATION

We can develop and design the products as per your detailed requirements.

Disclaimer
This datasheet is for the customers' reference. All the specifications are subject to change without notice.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.