

HF9111

TO-5 TYPE HIGH TEMPERATURE
HERMETICALLY SEALED RELAY



Features

- Ambient temperature can be 180°C
- High ambient applicability
- Hermetically welded and marked by laser

AMBIENT ADAPTABILITY

Ambient temperature	-65 °C to 180 °C
Humidity	98 %, 40 °C
Low air pressure	4.39 kPa
Sine vibration	Frequency 10 Hz to 3000 Hz
	Acceleration 294 m/s ²
Shock resistance	735 m/s ²
Random vibration	40 (m/s ²)/Hz
Steady-state acceleration	490 m/s ²

CONTACT DATA


Arrangement	2 C	
Contact resistance	Initial max.	125 mΩ
	After life max.	250 mΩ

Contact ratings

Contact load	Type	Electrical life min.
0.5 A 28 Vd.c.	Resistive	1 x 10 ⁵ ops
50 μA 50 mVd.c.	Low level	1 x 10 ⁵ ops

SPECIFICATION

Insulation resistance min.		10000 MΩ (@ 500 Vd.c.)
Dielectric strength min. (Normal condition)	Between open contacts	500 Vr.m.s.
	Between contact & coil	500 Vr.m.s.
	Between contact & cover	500 Vr.m.s.
	Between contact group	500 Vr.m.s.
	Between coil & cover	500 Vr.m.s.
Dielectric strength min. (Low air pressure condition)		125 Vr.m.s.
Leakage rate max.		1 x 10 ⁻³ Pa•cm ³ /s
Operate time max.		2 ms
Release time max.		2 ms
Mounting style		See the mounting dimension
Terminals		See the terminal styles
Work position		Random
Weight max.		2.55 g




COIL DATA									
Nominal coil power			Approx. 0.5W						

Coil Version									
Order Number	Coil voltage		at 25 °C				-65°C to 125°C		
	Nominal voltage	Value max.	Coil resistance (1±10%) Ω	Pick-up voltage max.	Hold voltage max.	Drop-out voltage min.	Pick-up voltage max.	Hold voltage max.	Drop-out voltage min.
	012	12	16	390	7.0	4.0	0.63	10.8	6.5
027	27	32	1560	14.2	8.0	1.37	24.3	13.0	0.89

Notes: We can offer many kinds of coil voltage under the requirement of users.

ORDERING INFORMATION			
Type	HF9111	-027	-01
Order Number	012、027		
Terminals Style	01、02、03 (See " Terminal styles " below)		

OUTLINE DIMENSIONS AND WIRING DIAGRAM									
									Unit:mm

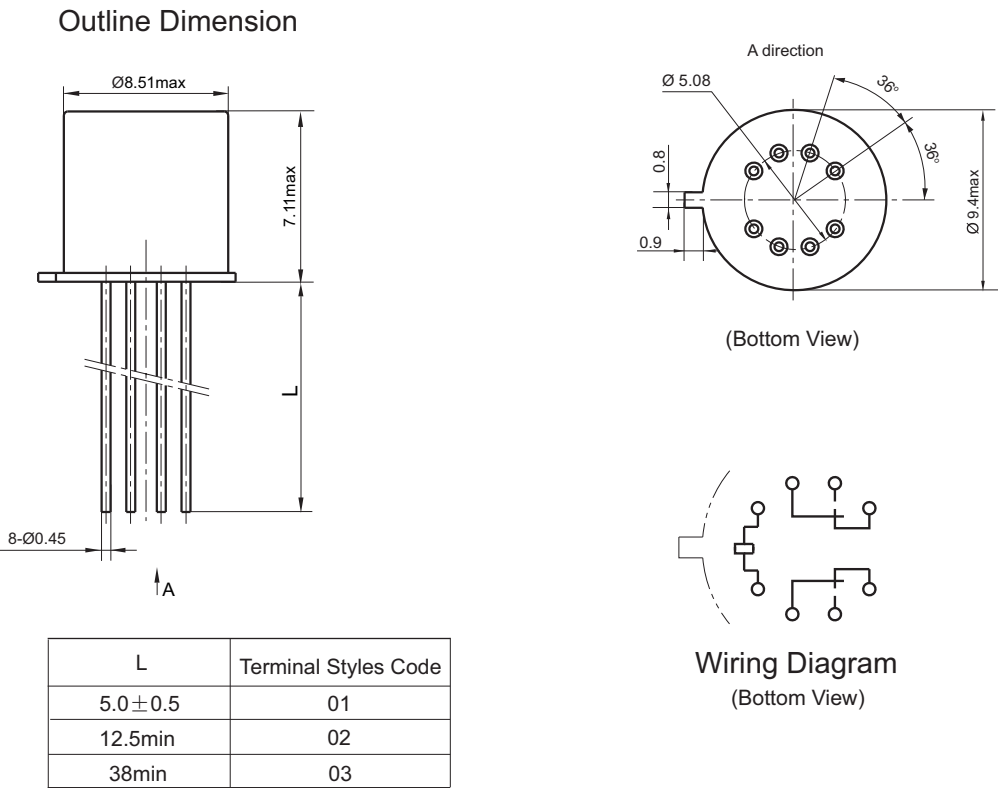

Disclaimer
This datasheet is for the customers' reference. All the specifications are subject to change without notice.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.