


## SAA SERIES SOLID STATE RELAY

**SAA-400K025H-1Z**  
**SAA-400K040H-1Z**  
**SAA-400K050H-1Z**  
**SAA-400K075H-1Z**  
**SAA-400K090H-1Z**  
**SAA-400K100H-1Z**

**AC Control AC Loading S.S.R**

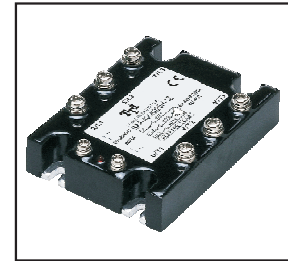


## Specifications


MODEL SERIES NO.	CONTROL VOLTAGE	MUST TURN OFF VOLTAGE	INPUT IMPEDANCE	LOADING CURRENT	LOADING VOLTAGE	MIN BLOCKING VOLTAGE	MAX OFF-STATE LEAKAGE	FREQUENCY RANGE	MAX 1-CYCLE PEAK SURGE
SAA-400K025H-1Z	80 - 280 VAC	MAX 10 VDC	1.5 K $\Omega$	25A	48 ~ 480VAC	1200VAC	LESS 10mA	47-70HZ	250A
SAA-400K040H-1Z	80 - 280 VAC	MAX 10 VDC	1.5 K $\Omega$	40A	48 ~ 480VAC	1200VAC	LESS 10mA	47-70HZ	400A
SAA-400K050H-1Z	80 - 280 VAC	MAX 10 VDC	1.5 K $\Omega$	50A	48 ~ 480VAC	1200VAC	LESS 10mA	47-70HZ	500A
SAA-400K075H-1Z	80 - 280 VAC	MAX 10 VDC	1.5 K $\Omega$	75A	48 ~ 480VAC	1200VAC	LESS 10mA	47-70HZ	750A
SAA-400K090H-1Z	80 - 280 VAC	MAX 10 VDC	1.5 K $\Omega$	90A	48 ~ 480VAC	1200VAC	LESS 10mA	47-70HZ	900A
SAA-400K100H-1Z	80 - 280 VAC	MAX 10 VDC	1.5 K $\Omega$	100A	48 ~ 480VAC	1200VAC	LESS 10mA	47-70HZ	1000A

MODEL SERIES NO.	MAX OFF STATE dv/dt	MAX ON-STATE VOLTAGE DROP	ISOLATE IMPEDENCE	DIELECTRIC STRENGTH INPUT-OUTPUT	DIELECTRIC STRENGTH INPUT,OUTPUT-CASE	TURN ON TIME	TURN OFF TIME	CAPACITANCE IN-OUT	WEIGHT (g)
SAA-400K025H-1Z	1000 V/ $\mu$ sec	1.6Vrms	10 <sup>9</sup> $\Omega$	4000 VACrms	4000 VACrms	LESS 2 msec	LESS 1/2 AC CYCLE	LESS 15 PF	400 g
SAA-400K040H-1Z	1000 V/ $\mu$ sec	1.6Vrms	10 <sup>9</sup> $\Omega$	4000 VACrms	4000 VACrms	LESS 2 msec	LESS 1/2 AC CYCLE	LESS 15 PF	400 g
SAA-400K050H-1Z	1000 V/ $\mu$ sec	1.6Vrms	10 <sup>9</sup> $\Omega$	4000 VACrms	4000 VACrms	LESS 2 msec	LESS 1/2 AC CYCLE	LESS 15 PF	400 g
SAA-400K075H-1Z	1000 V/ $\mu$ sec	1.6Vrms	10 <sup>9</sup> $\Omega$	4000 VACrms	4000 VACrms	LESS 2 msec	LESS 1/2 AC CYCLE	LESS 15 PF	400 g
SAA-400K090H-1Z	1000 V/ $\mu$ sec	1.6Vrms	10 <sup>9</sup> $\Omega$	4000 VACrms	4000 VACrms	LESS 2 msec	LESS 1/2 AC CYCLE	LESS 15 PF	400 g
SAA-400K100H-1Z	1000 V/ $\mu$ sec	1.6Vrms	10 <sup>9</sup> $\Omega$	4000 VACrms	4000 VACrms	LESS 2 msec	LESS 1/2 AC CYCLE	LESS 15 PF	400 g


## Parts No.

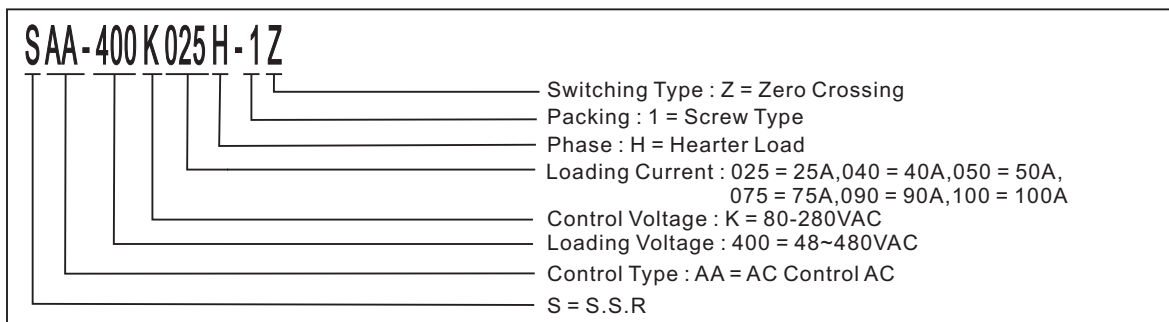


## Outline Dimensions (Unit : mm)

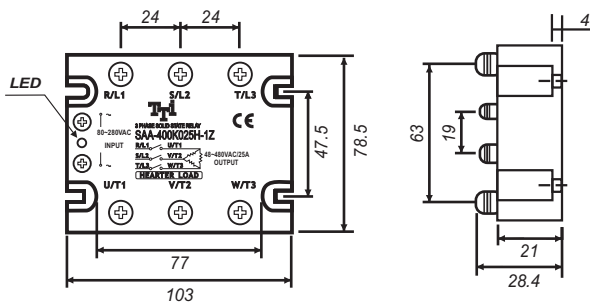

## Equivalent Circuit

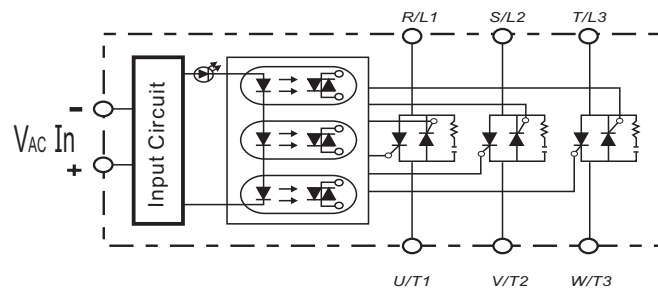


## Example : 3 $\phi$ S.S.R Application

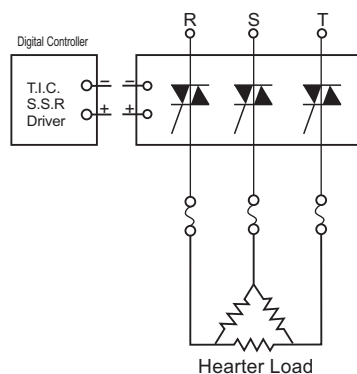

## Characteristic Curves

RMS On-state Current Versus Case Temperature

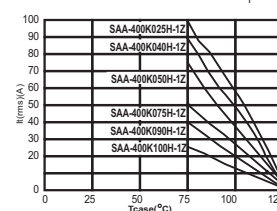

Non Repetitive Surge On-state Current Versus Number Of Cycles

