

SDA SERIES SOLID STATE RELAY

SDA-400B010S-1Z
SDA-400B015S-1Z
SDA-400B025S-1Z
SDA-400B040S-1Z
SDA-400B050S-1Z
SDA-400B075S-1Z
SDA-400B090S-1Z
SDA-400B100S-1Z
SDA-400B125S-1Z

DC Control AC Loading S.S.R



Specifications

MODEL SERIES NO.	CONTROL VOLTAGE	MUST TURN OFF VOLTAGE	INPUT IMPEDANCE	LOADING CURRENT	LOADING VOLTAGE	MIN BLOCKING VOLTAGE	MAX OFF-STATE LEAKAGE	FREQUENCY RANGE	MAX 1-CYCLE PEAK SURGE
SDA-400B010S-1Z	4 - 32 VDC	MAX 1.0 VDC	1.5 KΩ	10A	48 ~ 480VAC	1200VAC	LESS 5 mA	47-70HZ	100A
SDA-400B015S-1Z	4 - 32 VDC	MAX 1.0 VDC	1.5 KΩ	15A	48 ~ 480VAC	1200VAC	LESS 5 mA	47-70HZ	150A
SDA-400B025S-1Z	4 - 32 VDC	MAX 1.0 VDC	1.5 KΩ	25A	48 ~ 480VAC	1200VAC	LESS 5 mA	47-70HZ	250A
SDA-400B040S-1Z	4 - 32 VDC	MAX 1.0 VDC	1.5 KΩ	40A	48 ~ 480VAC	1200VAC	LESS 5 mA	47-70HZ	400A
SDA-400B050S-1Z	4 - 32 VDC	MAX 1.0 VDC	1.5 KΩ	50A	48 ~ 480VAC	1200VAC	LESS 5 mA	47-70HZ	500A
SDA-400B075S-1Z	4 - 32 VDC	MAX 1.0 VDC	1.5 KΩ	75A	48 ~ 480VAC	1200VAC	LESS 5 mA	47-70HZ	750A
SDA-400B090S-1Z	4 - 32 VDC	MAX 1.0 VDC	1.5 KΩ	90A	48 ~ 480VAC	1200VAC	LESS 5 mA	47-70HZ	900A
SDA-400B100S-1Z	4 - 32 VDC	MAX 1.0 VDC	1.5 KΩ	100A	48 ~ 480VAC	1200VAC	LESS 5 mA	47-70HZ	1000A
SDA-400B125S-1Z	4 - 32 VDC	MAX 1.0 VDC	1.5 KΩ	125A	48 ~ 480VAC	1200VAC	LESS 5 mA	47-70HZ	1250A

MODEL SERIES NO.	MAX OFF STATE dv/dt	MAX ON-STATE VOLTAGE DROP	ISOLATE IMPEDENCE	DIELECTRIC STRENGTH INPUT-OUTPUT	DIELECTRIC STRENGTH INPUT,OUTPUT-CASE	TURN ON TIME	TURN OFF TIME	CAPACITANCE IN-OUT	WEIGHT (g)
SDA-400B010S-1Z	1000 V/μ sec	2.0Vrms	10 ⁹ Ω	4000 VACrms	4000 VACrms	LESS 2 msec	LESS 1/2 AC CYCLE	LESS 15 PF	100 g
SDA-400B015S-1Z	1000 V/μ sec	2.0Vrms	10 ⁹ Ω	4000 VACrms	4000 VACrms	LESS 2 msec	LESS 1/2 AC CYCLE	LESS 15 PF	100 g
SDA-400B025S-1Z	1000 V/μ sec	2.0Vrms	10 ⁹ Ω	4000 VACrms	4000 VACrms	LESS 2 msec	LESS 1/2 AC CYCLE	LESS 15 PF	100 g
SDA-400B040S-1Z	1000 V/μ sec	2.0Vrms	10 ⁹ Ω	4000 VACrms	4000 VACrms	LESS 2 msec	LESS 1/2 AC CYCLE	LESS 15 PF	100 g
SDA-400B050S-1Z	1000 V/μ sec	2.0Vrms	10 ⁹ Ω	4000 VACrms	4000 VACrms	LESS 2 msec	LESS 1/2 AC CYCLE	LESS 15 PF	100 g
SDA-400B075S-1Z	1000 V/μ sec	2.0Vrms	10 ⁹ Ω	4000 VACrms	4000 VACrms	LESS 2 msec	LESS 1/2 AC CYCLE	LESS 15 PF	100 g
SDA-400B090S-1Z	1000 V/μ sec	2.0Vrms	10 ⁹ Ω	4000 VACrms	4000 VACrms	LESS 2 msec	LESS 1/2 AC CYCLE	LESS 15 PF	100 g
SDA-400B125S-1Z	1000 V/μ sec	2.0Vrms	10 ⁹ Ω	4000 VACrms	4000 VACrms	LESS 2 msec	LESS 1/2 AC CYCLE	LESS 15 PF	100 g

Parts No.

SDA-400B010S-1Z

Switching Type : Z = Zero Crossing

Packing : 1 = Screw Type

Phase : S = Single Phase

Loading Current : 010 = 10A,015 = 15A,025 = 25A,040 = 40A,
050 = 50A,075 = 75A,090 = 90A,100 = 100A,125=125A


Control Voltage : B = 4-32VDC

Control Loading Voltage : 400 = 48~480VAC


Control Type : DA = DC Control AC

S = S.S.R

Outline Dimensions(Unit : mm)

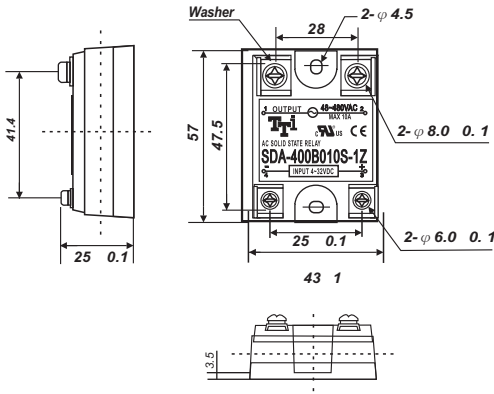

Characteristic Curves

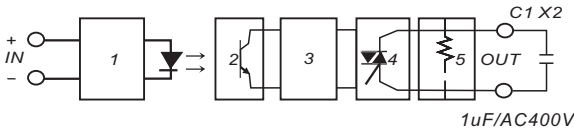

- 1.Input Circuit
- 2.Photo Detector
- 3.Zero-Crossing Circuit
- 5.Output Circuit
- 5.Protected Circuit