


SDD SERIES SOLID STATE RELAY

SDD-100A008S-5

DC Control DC Loading S.S.R



Specifications

MODEL SERIES NO.	CONTROL VOLTAGE	MUST TURN OFF VOLTAGE	INPUT IMPEDANCE	LOADING CURRENT	LOADING VOLTAGE	MIN BLOCKING VOLTAGE	MAX OFF-STATE LEAKAGE	FREQUENCY RANGE	MAX 1-CYCLE PEAK SURGE
SDD-100A008S-5	3 - 32 VDC	MAX 1.0 VDC	1.5 KΩ	8A	3 ~ 100VDC	400VDC	LESS 2 mA	47-70HZ	16A

MODEL SERIES NO.	MAX OFF STATE dv/dt	MAX ON-STATE VOLTAGE DROP	ISOLATE IMPEDANCE	DIELECTRIC STRENGTH INPUT-OUTPUT	DIELECTRIC STRENGTH INPUT-OUTPUT-CASE	TURN ON TIME	TURN OFF TIME	CAPACITANCE IN-OUT	WEIGHT (g)
SDD-100A008S-5	200 V/μ sec	1.2Vrms	10 ⁹ Ω	2500 VACrms	—	LESS 2 msec	LESS 2 msec	LESS 15 PF	12 g

Parts No.

SDD-100A008S-5

Packing : 5 = SIP of IC Packing Type

Phase : S = Single Phase

Loading Current : 008 = 8A


Control Voltage : A = 3-32VDC

Loading Voltage : 100 = 3~100VAC

Control Type : DD = DC Control DC

S = S.S.R

Outline Dimensions(Unit : mm)

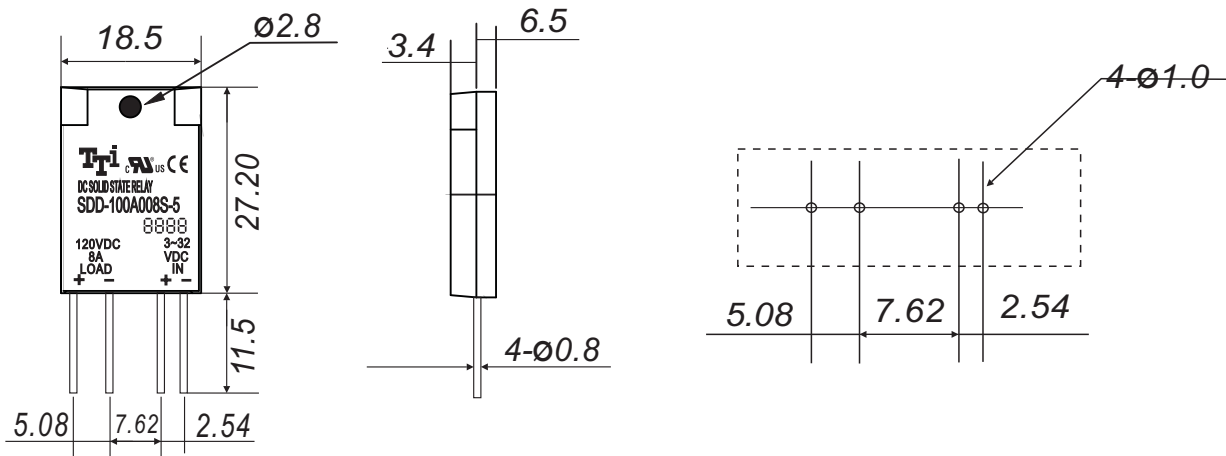

Equivalent Circuit

