


PARTS NUMBER SYSTEM

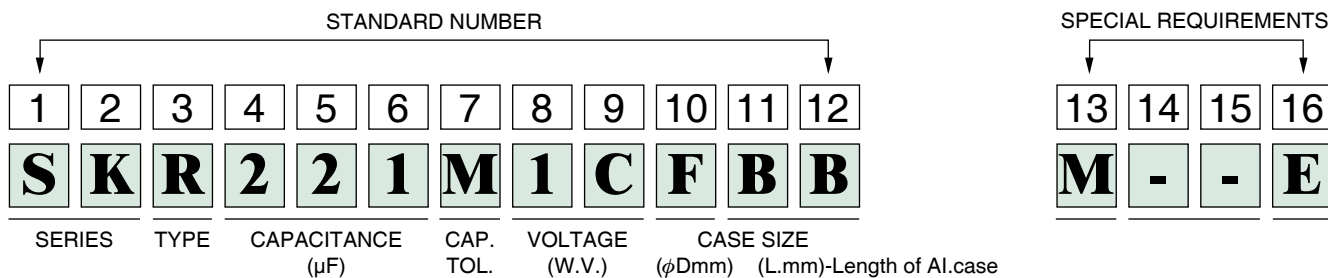

Series			Code	Type	Description	CAP (µF)	Code	Tolerance (%)	Code	Voltage (W.V.)	Code	Diameter (φ)	Code	Length (L)	Code	Code	Description
PS	NS	HM	R	Radial	Bulk	0.1	OR1	+10	K	2.5	0E	3	A	11	11	W	Without Sleeve
PT	SK	LT				0.22	R22	-10		4	0G	3.8	S	11.5	BB		Customer Assign
PH	SM	LL	P	Radial	Taping (Ammo Pack)	0.33	R33	+15	L	6.3	0J	4	C	12.5	BC	A-Z	Brand
PC	TK	HT				0.47	R47	-15		10	1A	5	D	31.5	DB		
PF	TM	HV	C	Radial	Lead Cut	1	010	+20	M	13	1P	6	W	35.5	DF	a~	Brand
CS	NK	HL				2.2	2R2	-20		16	1C	6.3	E	100	1H		
CA	LK	HF	F	Radial	Lead Forming Cut	3.3	3R3	+100	P	20	1D	7	Y	110	1A	Code	Description
CN	MZ	HX				4.7	4R7	-0		25	1E	8	F	115	1K		
CR	TB	KP	B	Radial	Lead Forming Only	10	100	+30	Q	35	1V	10	G	120	1B	E	PET Sleeve
CT	WL	MP				22	220	-10		40	1G	12	H	121	1M		
CE	WG	RP	Y	Radial	Lead Snap in	33	330	+20	R	50	1H	12.5	I	130	1C	Code	Description
CP	TL	XP				47	470	-0		63	1J	13	J	131	1P		
CH	TZ		W	Lug	Snap in Terminal	100	101	+50	T	80	1K	16	K	140	1D	Code	Description
CL	TH					220	221	-10		100	2A	18	L	144	1Q		
CF	TX		G	Lug	G Type Terminal	330	331	+75	U	125	2B	20	M	150	1E	Code	Description
CK	TF					470	471	-10		160	2C	22	N	155	1N		
CZ	WB		V	Lug	V Type Terminal	1000	102	+20	V	180	2M	25	O	157	1R	Code	Description
CB	UK					2200	222	-10		200	2D	30	P	160	1F		
SV	NC		S	Screw	Screw Terminal Type	3300	332	+20	H	250	2E	35	Q	170	1G	Code	Description
ST	RV					4700	472	-5		315	2F	40	R	180	1I		
NT	LP		M	Chip	Surface Mount Type	10000	103	+30	F	330	2U	51	V	190	1J	Code	Description
SS	HP					22000	223	-0		350	2V	64	1	196	1S		
SH	LS					33000	333	+100	W	400	2G	77	2	215	1L	Code	Description
SL	HS					47000	473	-10		450	2W	90	3	236	1T		
										500	2H						